EDM cutting sheet 1 / 4 – ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

DXF: ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM.dxf
units mm · gap between parts ≥ 5 mm · sheet 300 (RD) × 400 (TD) · clamping left 40, bottom 40
machine area 250 (RD) × 350 (TD) · placement margin 5 · effective area 240 (RD) × 340 (TD) from x 45, y 45

Rolling direction 0°


Normal quality (Q3)

Medium quality (Q4)

Highest quality (Q5)

Mikrosteg: leave a bridge at the bottom of the half-circle recess (2 per part)

Numbers: specimen no. (see list). Only for information, bitte nicht gravieren.

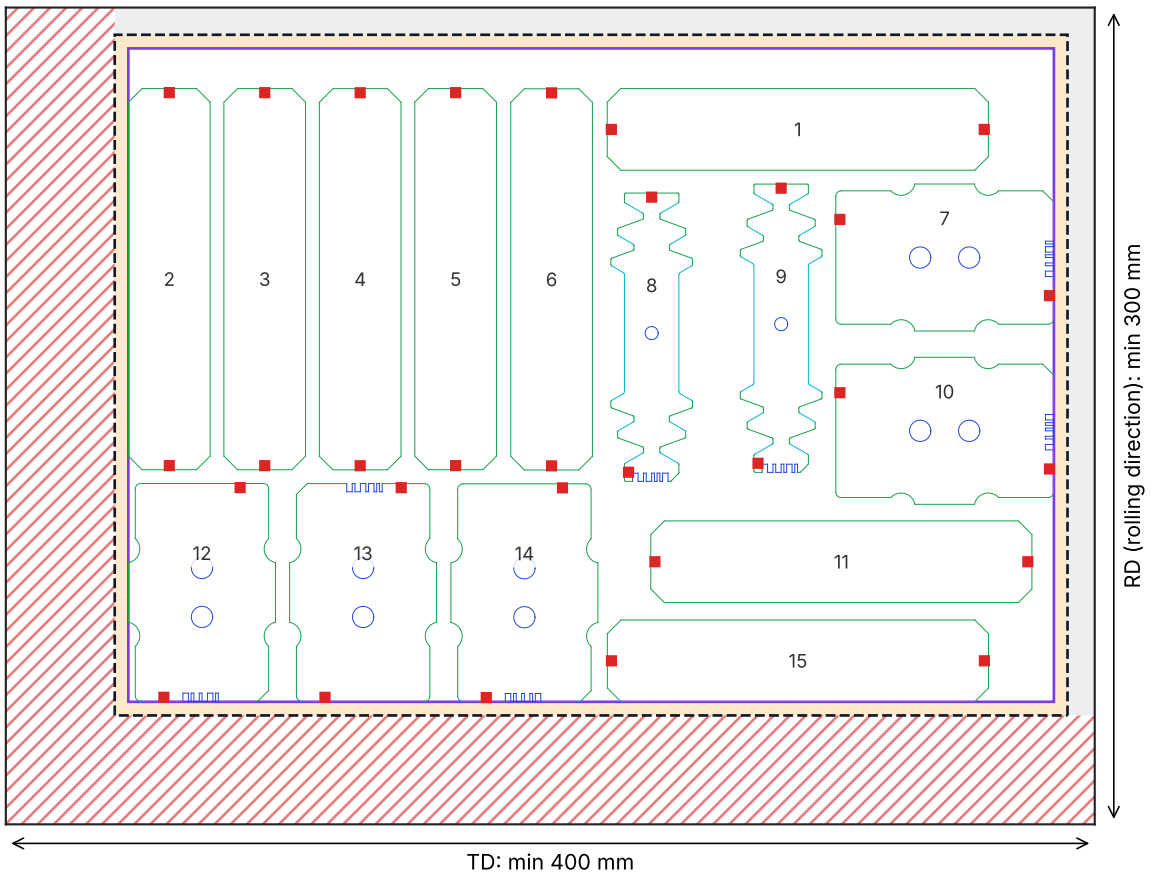

clamping (left 40, bottom 40 mm)
machine area 250 (RD) x 350 (TD) mm (wire travel)
placement margin 5 mm
effective area 240 (RD) x 340 (TD) mm (specimens)
sheet out of reach of the wire

ETH_600×500mm_2_
SHEET_v20260901_CT_bardcode_EDM

sheet 1 / 4

2026-11-10

EDM cutting sheet 2 / 4 – ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

DXF: ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM.dxf
units mm · gap between parts ≥ 5 mm · sheet 300 (RD) × 400 (TD) · clamping left 40, bottom 40
machine area 250 (RD) × 350 (TD) · placement margin 5 · effective area 240 (RD) × 340 (TD) from x 45, y 45

Rolling direction 0°


Normal quality (Q3)

Medium quality (Q4)

Highest quality (Q5)

Mikrosteg: leave a bridge at the bottom of the half-circle recess (2 per part)

Numbers: specimen no. (see list). Only for information, bitte nicht gravieren.

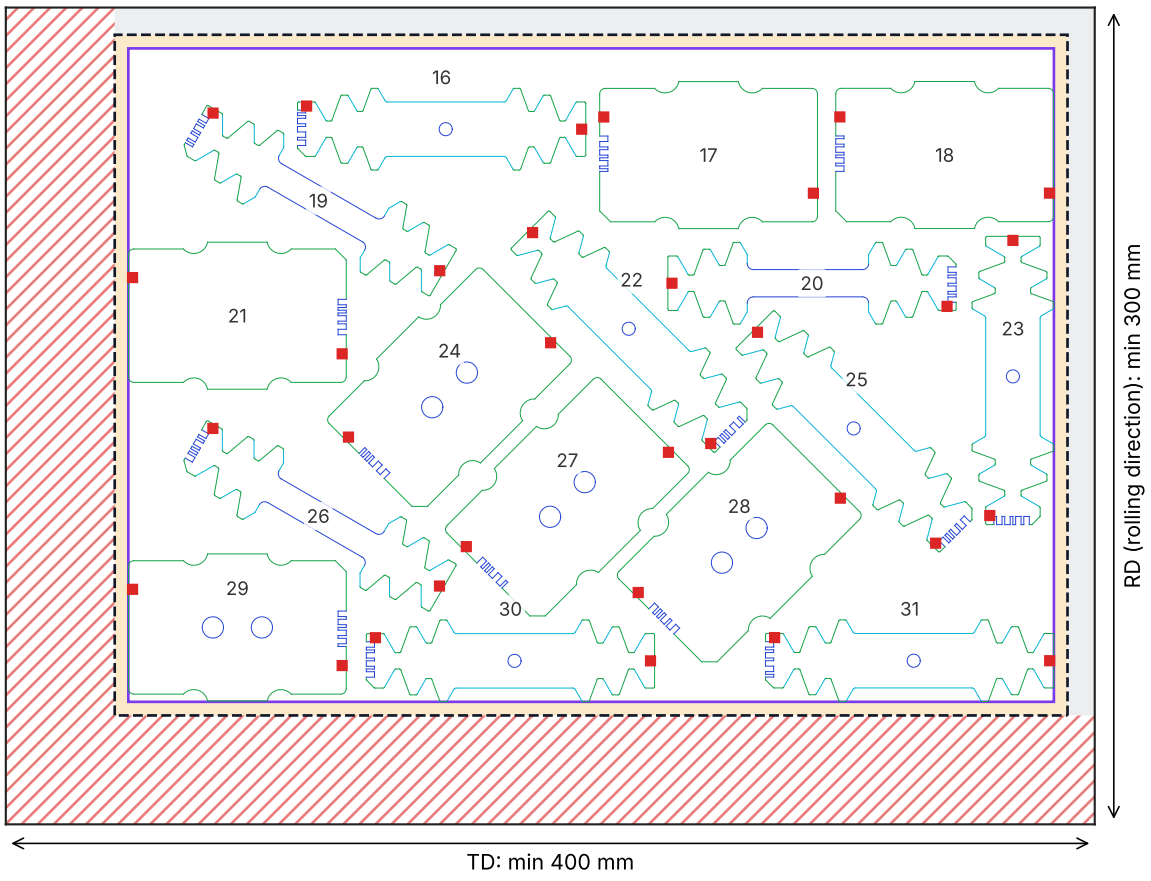

clamping (left 40, bottom 40 mm)
machine area 250 (RD) x 350 (TD) mm (wire travel)
placement margin 5 mm
effective area 240 (RD) x 340 (TD) mm (specimens)
sheet out of reach of the wire

ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

sheet 2 / 4

2026-11-10

EDM cutting sheet 3 / 4 – ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

DXF: ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM.dxf
units mm · gap between parts ≥ 5 mm · sheet 300 (RD) × 400 (TD) · clamping left 40, bottom 40
machine area 250 (RD) × 350 (TD) · placement margin 5 · effective area 240 (RD) × 340 (TD) from x 45, y 45

Rolling direction 0°


Normal quality (Q3)

Medium quality (Q4)

Highest quality (Q5)

Mikrosteg: leave a bridge at the bottom of the half-circle recess (2 per part)

Numbers: specimen no. (see list). Only for information, bitte nicht gravieren.

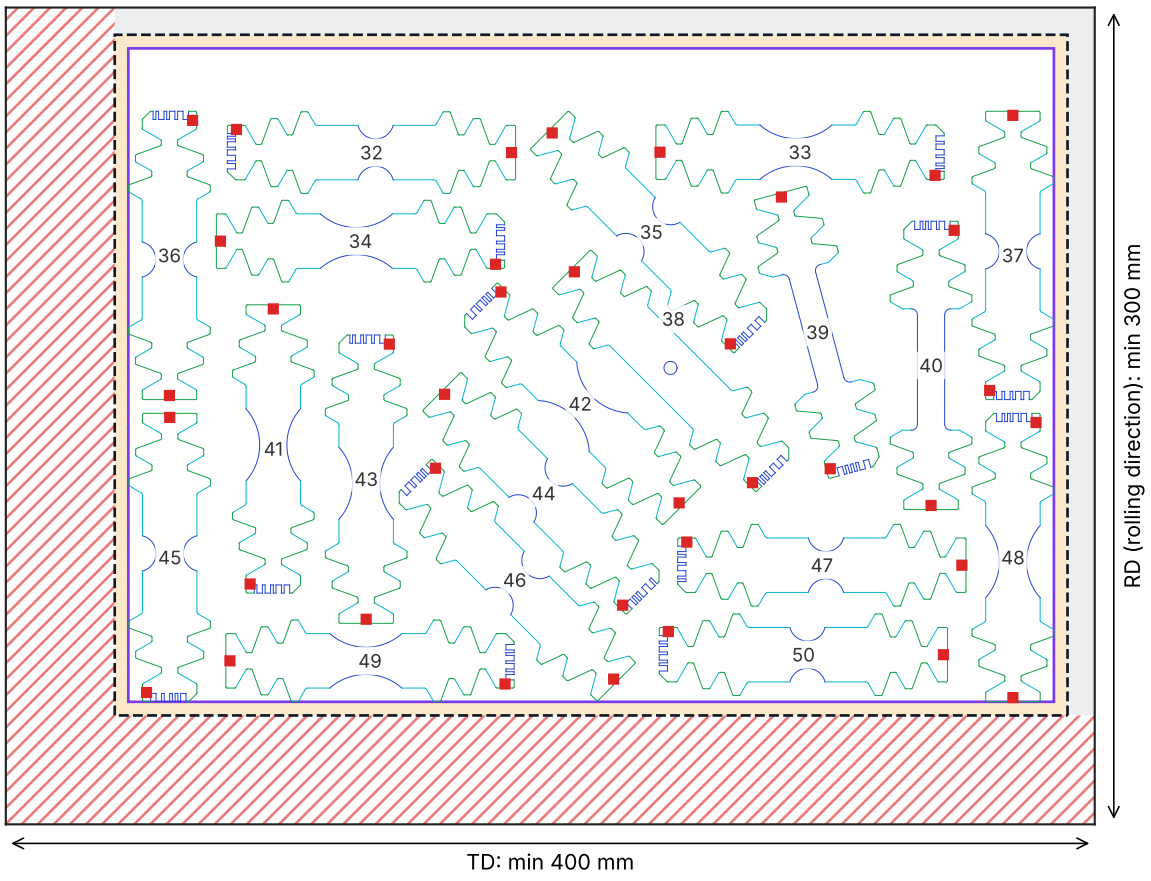

clamping (left 40, bottom 40 mm)
machine area 250 (RD) x 350 (TD) mm (wire travel)
placement margin 5 mm
effective area 240 (RD) x 340 (TD) mm (specimens)
sheet out of reach of the wire

ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

sheet 3 / 4

2026-11-10

EDM cutting sheet 4 / 4 – ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

DXF: ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM.dxf
units mm · gap between parts ≥ 5 mm · sheet 300 (RD) × 400 (TD) · clamping left 40, bottom 40
machine area 250 (RD) × 350 (TD) · placement margin 5 · effective area 240 (RD) × 340 (TD) from x 45, y 45

Rolling direction 0°


Normal quality (Q3)

Medium quality (Q4)

Highest quality (Q5)

Mikrosteg: leave a bridge at the bottom of the half-circle recess (2 per part)

Numbers: specimen no. (see list). Only for information, bitte nicht gravieren.

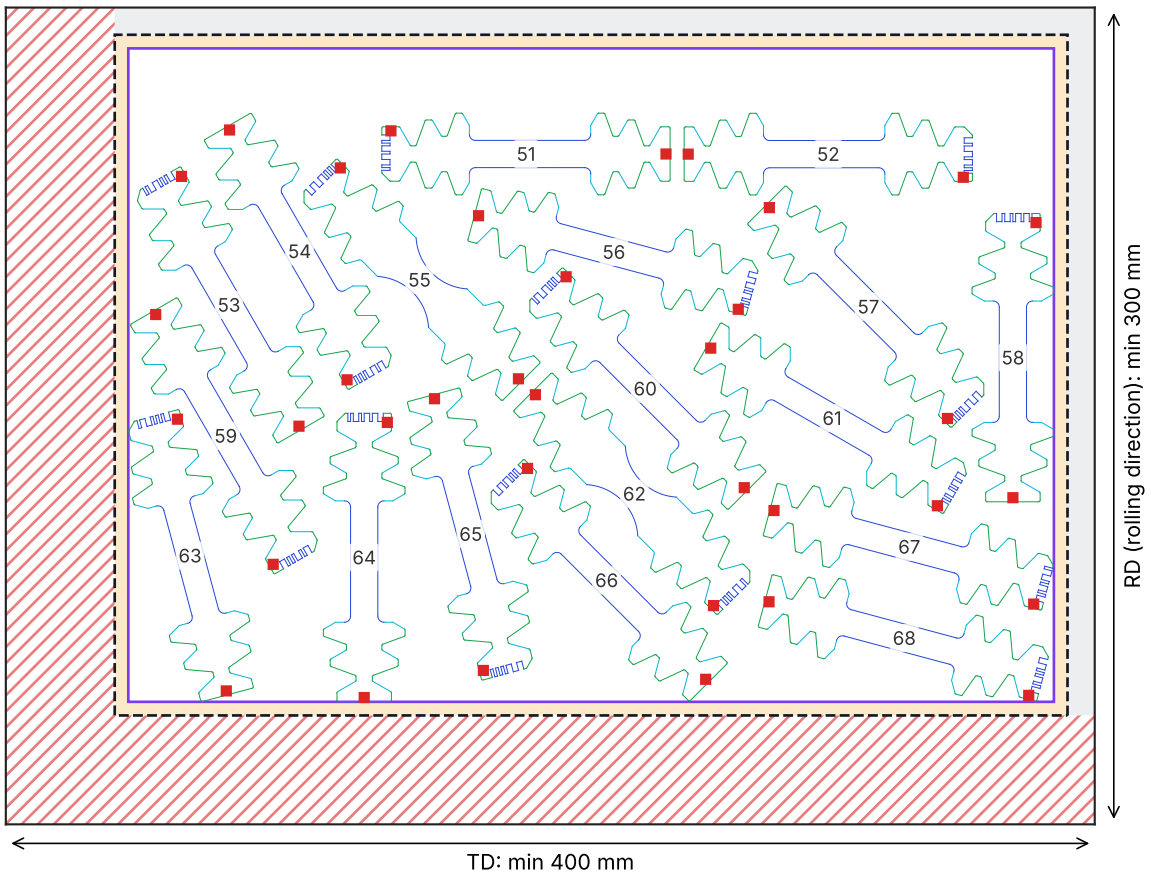

clamping (left 40, bottom 40 mm)
machine area 250 (RD) x 350 (TD) mm (wire travel)
placement margin 5 mm
effective area 240 (RD) x 340 (TD) mm (specimens)
sheet out of reach of the wire

ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM

sheet 4 / 4

2026-11-10

Specimen list – ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM (68 specimens)

No.	Sheet	Type	Angle to RD	Notch code (angle digit, index)	Specimen ID
1	1	TENS_FULL	90°	–	–
2	1	TENS_FULL	0°	–	–
3	1	TENS_FULL	0°	–	–
4	1	TENS_FULL	0°	–	–
5	1	TENS_FULL	0°	–	–
6	1	TENS_FULL	0°	–	–
7	1	MNAK_RECT_HOL	0°	0, 2	–
8	1	CHCH	0°	0, 1	–
9	1	CHCH	0°	0, 2	–
10	1	MNAK_RECT_HOL	0°	0, 1	–
11	1	TENS_FULL	90°	–	–
12	1	MNAK_RECT_HOL	90°	6, 2	–
13	1	MNAK_RECT_HOL	90°	6, 3	–
14	1	MNAK_RECT_HOL	90°	6, 1	–
15	1	TENS_FULL	90°	–	–
16	2	CHCH	90°	6, 3	–
17	2	MNAK_RECT_FULL	0°	0, 2	–
18	2	MNAK_RECT_FULL	0°	0, 3	–
19	2	UTUT	60°	4, 2	–
20	2	UTUT	90°	6, 1	–
21	2	MNAK_RECT_FULL	0°	0, 1	–
22	2	CHCH	45°	3, 2	–
23	2	CHCH	0°	0, 3	–
24	2	MNAK_RECT_HOL	45°	3, 3	–
25	2	CHCH	45°	3, 1	–
26	2	UTUT	60°	4, 1	–
27	2	MNAK_RECT_HOL	45°	3, 2	–
28	2	MNAK_RECT_HOL	45°	3, 1	–
29	2	MNAK_RECT_HOL	0°	0, 3	–
30	2	CHCH	90°	6, 1	–
31	2	CHCH	90°	6, 2	–
32	3	NT06	90°	6, 3	–
33	3	NT20	90°	6, 3	–
34	3	NT20	90°	6, 2	–
35	3	NT06	45°	3, 3	–
36	3	NT06	0°	0, 2	–
37	3	NT06	0°	0, 3	–
38	3	CHCH	45°	3, 3	–
39	3	UTUT	15°	1, 1	–
40	3	UTUT	0°	0, 1	–
41	3	NT20	0°	0, 3	–
42	3	NT20	45°	3, 1	–
43	3	NT20	0°	0, 2	–
44	3	NT06	45°	3, 2	–
45	3	NT06	0°	0, 1	–

Specimen list – ETH_600×500mm_2_SHEET_v20260901_CT_bardcode_EDM (68 specimens)

No.	Sheet	Type	Angle to RD	Notch code (angle digit, index)	Specimen ID
46	3	NT06	45°	3, 1	–
47	3	NT06	90°	6, 2	–
48	3	NT20	0°	0, 1	–
49	3	NT20	90°	6, 1	–
50	3	NT06	90°	6, 1	–
51	4	UTUT	90°	6, 2	–
52	4	UTUT	90°	6, 3	–
53	4	UTUT	30°	2, 2	–
54	4	UTUT	30°	2, 3	–
55	4	NT20	45°	3, 3	–
56	4	UTUT	75°	5, 3	–
57	4	UTUT	45°	3, 3	–
58	4	UTUT	0°	0, 3	–
59	4	UTUT	30°	2, 1	–
60	4	UTUT	45°	3, 2	–
61	4	UTUT	60°	4, 3	–
62	4	NT20	45°	3, 2	–
63	4	UTUT	15°	1, 2	–
64	4	UTUT	0°	0, 2	–
65	4	UTUT	15°	1, 3	–
66	4	UTUT	45°	3, 1	–
67	4	UTUT	75°	5, 2	–
68	4	UTUT	75°	5, 1	–