EDM cutting sheet 1 / 1 – ETH_450×380mm_ShearEDM_v20250520_EDM

DXF: ETH_450×380mm_ShearEDM_v20250520_EDM.dxf
units mm · gap between parts ≥ 5 mm · sheet 400 × 300 · clamping left 40, bottom 40
machine area 350 × 250 · placement margin 5 · effective area 340 × 240 from (45, 45)

Rolling direction 0°


Normal quality (Q3)

Medium quality (Q4)

Highest quality (Q5)

Mikrosteg: leave a bridge at the bottom of the half-circle recess (2 per part)

Numbers: specimen no. (see list). Only for information, bitte nicht gravieren.

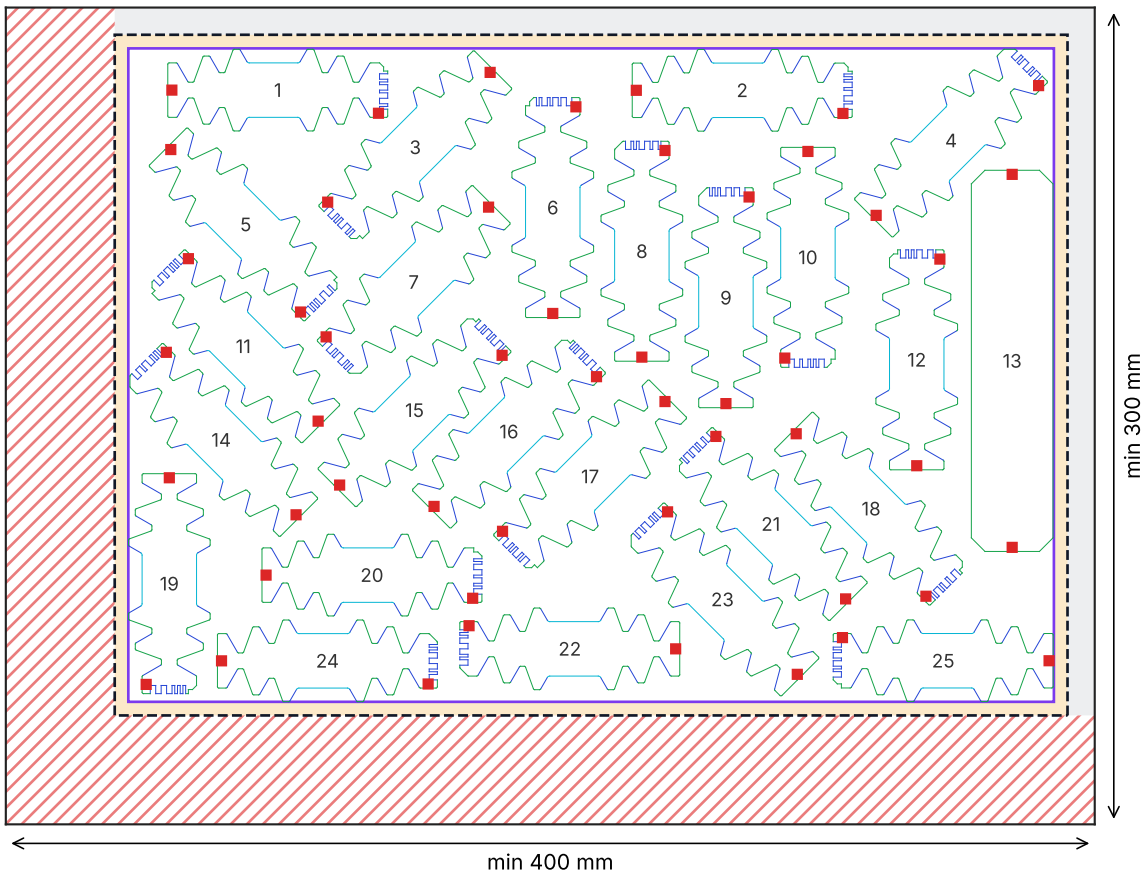

clamping (left 40, bottom 40 mm)
machine area 350 × 250 mm (wire travel)
placement margin 5 mm
effective area 340 × 240 mm (specimens)
sheet out of reach of the wire

ETH_450×380mm_ShearEDM_v20250520_EDM
sheet 1 / 1
2026-11-09

Specimen list – ETH_450×380mm_ShearEDM_v20250520_EDM (25 specimens)

No.	Sheet	Type	Angle to RD	Notch code (angle digit, index)	Specimen ID
1	1	SHHD	90°	6, 8	–
2	1	SHHD	90°	6, 7	–
3	1	SHLD	135°	9, 2	–
4	1	SHMD	135°	9, 5	–
5	1	SHLD	45°	3, 2	–
6	1	SHLD	0°	0, 2	–
7	1	SHMD	135°	9, 4	–
8	1	SHMD	0°	0, 5	–
9	1	SHMD	0°	0, 4	–
10	1	SHLD	0°	0, 1	–
11	1	SHLD	45°	3, 1	–
12	1	SHHD	0°	0, 8	–
13	1	TENS_FULL	0°	–	–
14	1	SHMD	45°	3, 5	–
15	1	SHHD	135°	9, 8	–
16	1	SHHD	135°	9, 7	–
17	1	SHLD	135°	9, 1	–
18	1	SHHD	45°	3, 8	–
19	1	SHHD	0°	0, 7	–
20	1	SHLD	90°	6, 2	–
21	1	SHHD	45°	3, 7	–
22	1	SHMD	90°	6, 5	–
23	1	SHMD	45°	3, 4	–
24	1	SHMD	90°	6, 4	–
25	1	SHLD	90°	6, 1	–