

Embedded Video Systems With Zephyr

Josuah Demangeon, Panoramix Labs, tinyVision.ai

Background

A contractor working essentially with tinyVision.ai



Autoportrait: I am curious about a lot of topics, but only scratch the surface.

You are welcome and invited to dive in depth!

Video Systems

Famous example: home cinema




Pro Video
Camera

Video editing
software

Distribution
network

Final destination:
human eyes

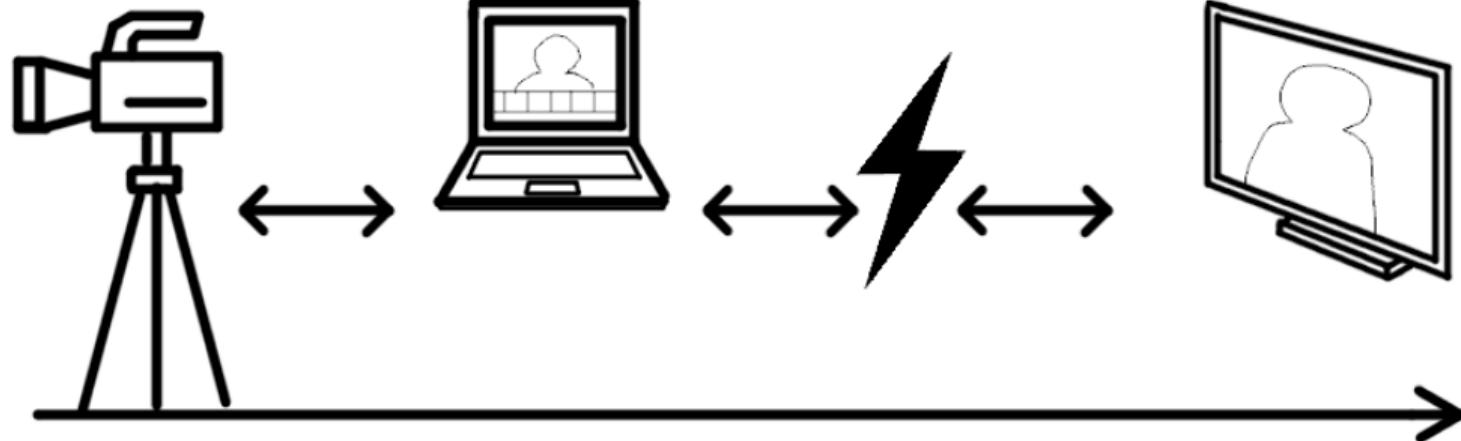


Pro Video
Camera

Video editing
software

Distribution
network

Final destination:
human eyes

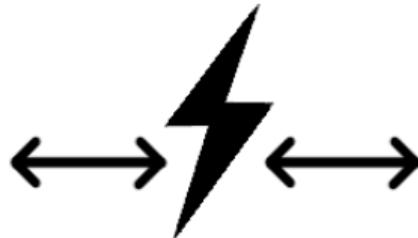


Unlimited
budget

Unlimited
budget

Unlimited
budget

Unlimited
budget



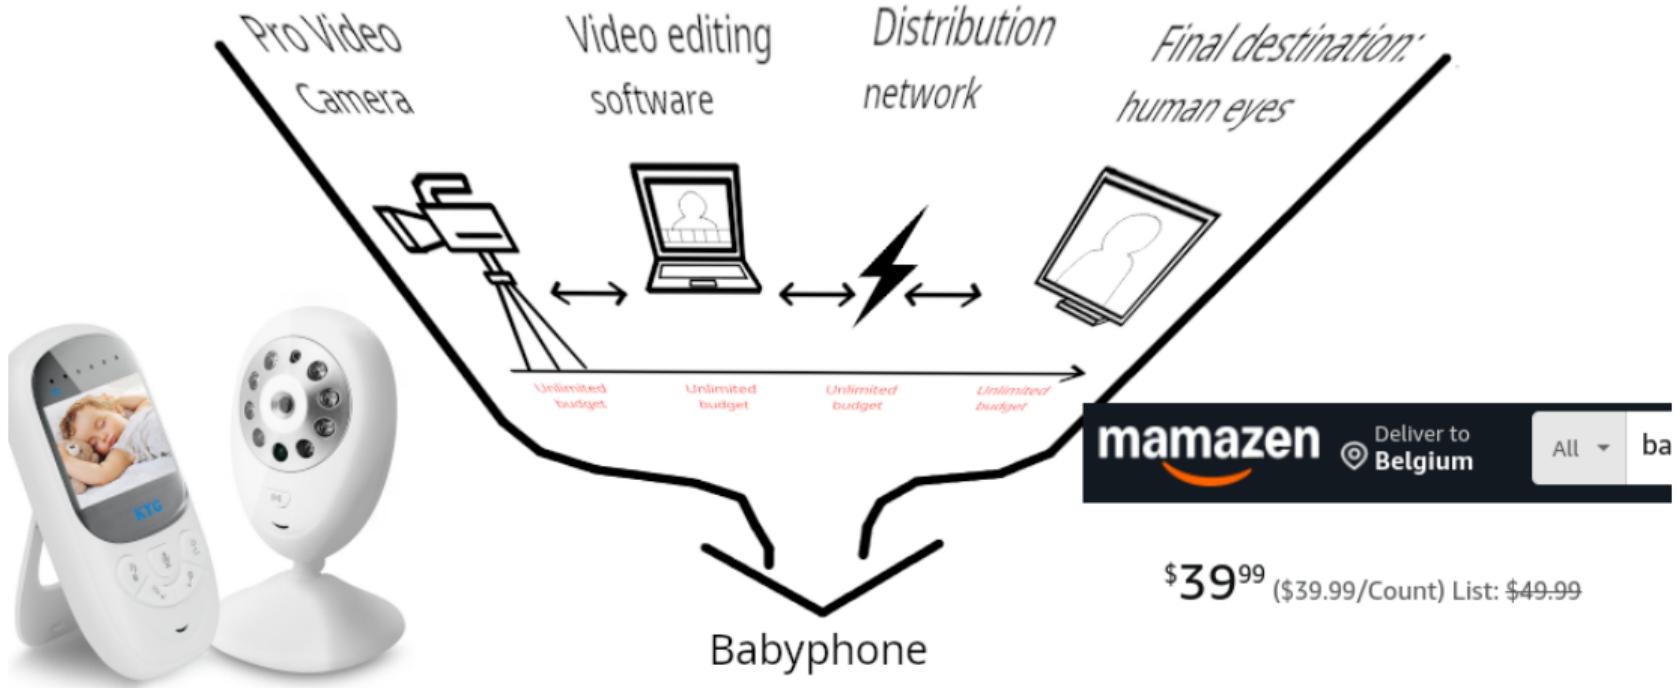

Embedded Video Systems

Constraints:

- > Cost budget
- > Processing budget
- > Time budget (low-latency, real-time)

Can only work at low-resolution...

Embedded Video Systems

Constraints:

- > Cost budget
- > Processing budget
- > Time budget (low-latency, real-time)

Can only work at low-resolution... <- FALSE!

Pro Video
Camera



Video editing
software



Distribution
network



Final destination:
human eyes




Needs an operating system too!


Embedded is not always low-end.

Embedded Video Systems

"Why not use an USB camera?"

We are now implementing the USB camera *itself*.

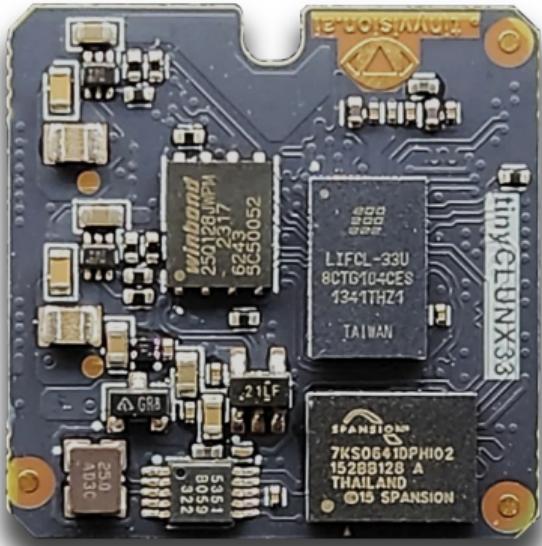

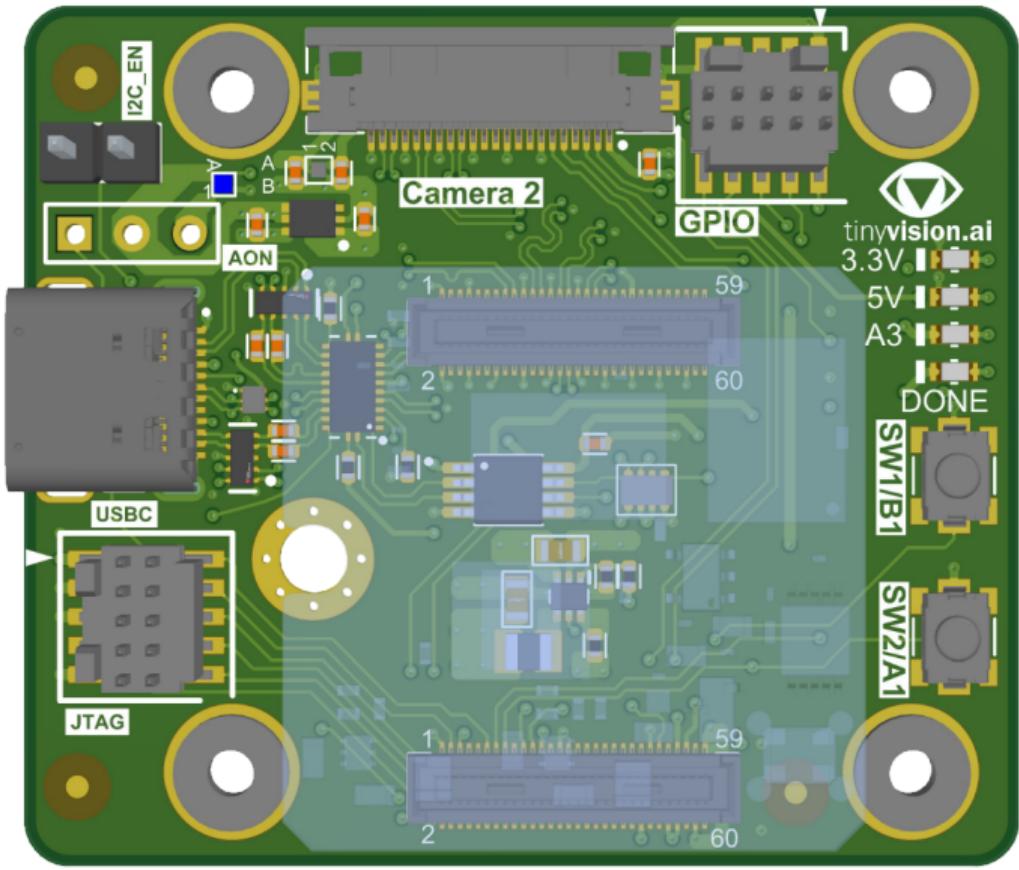

Embedded Video Systems

"Why not just a Raspberry Pi?"

-> Power budget

-> Performance

-> Cost

-> Latency




Embedded Video Systems

Can be very large:





We can imagine a lot involved to assist the video function:

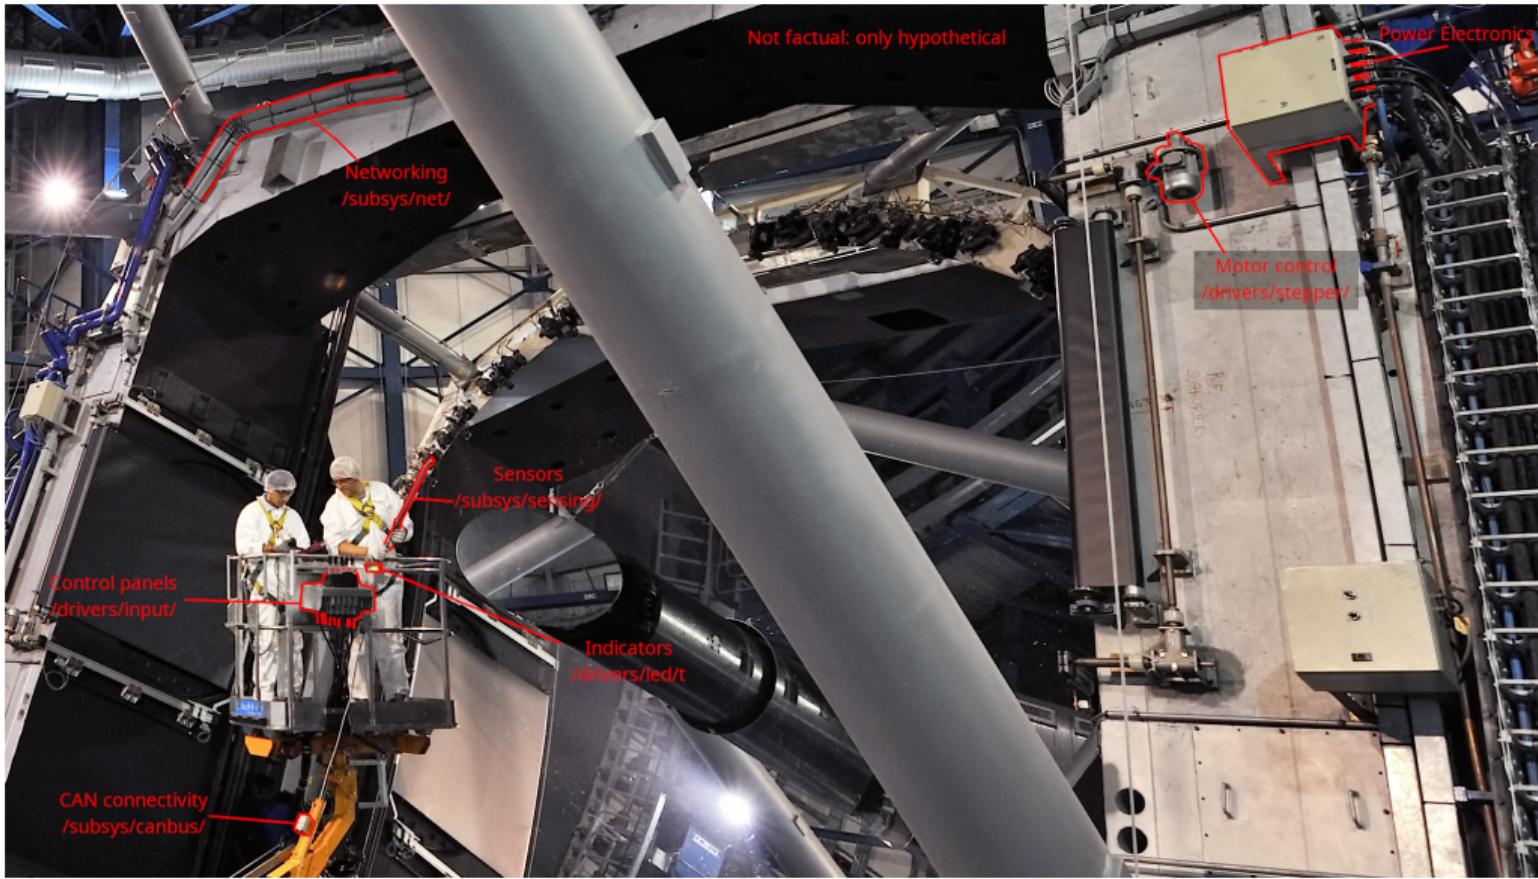

Still there on small embedded systems:

- > Motor for auto-focus ("VCM" motor

```
#include <zephyr/drivers/video-controls.h>
```

- > I2C communication with other chips

```
(#include <zephyr/drivers/i2c.h>)
```

- > Turning on/off the chip power ([Power Management](#))

Embedded Video Systems

But usually the smaller the better: how to shrink?

Switch from Linux OS -> RTOS like Zephyr

FFmpeg -> ???

Gstreamer -> ???

OpenCV -> ???

PyTorch -> ???

/dev/video0 -> ???


Everything to reinvent! Needs a new ecosystem.

Zephyr Video APIs

Systems doing what?

Changed usage of image sensors

- From one image sensor to multiple image sensors in device **Complexity**
- From simple sensors to sensors with advanced features
- From photography to imaging and vision **Variety**
- From few companies to thousands of companies **Expansion**
- More and more time is used in image sensor integration, even for basics – how to reduce the effort – by MIPI CCS. **Time**

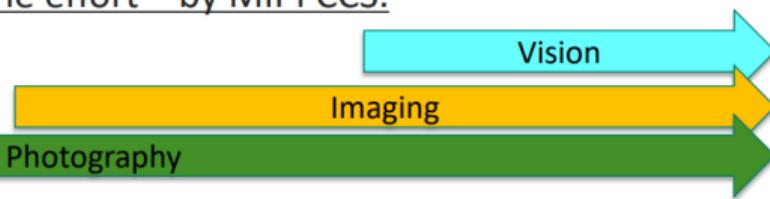



On a journey from Phontons to Video

Photodiode

Phenomenon of semiconductors producing voltage when exposed to the light.





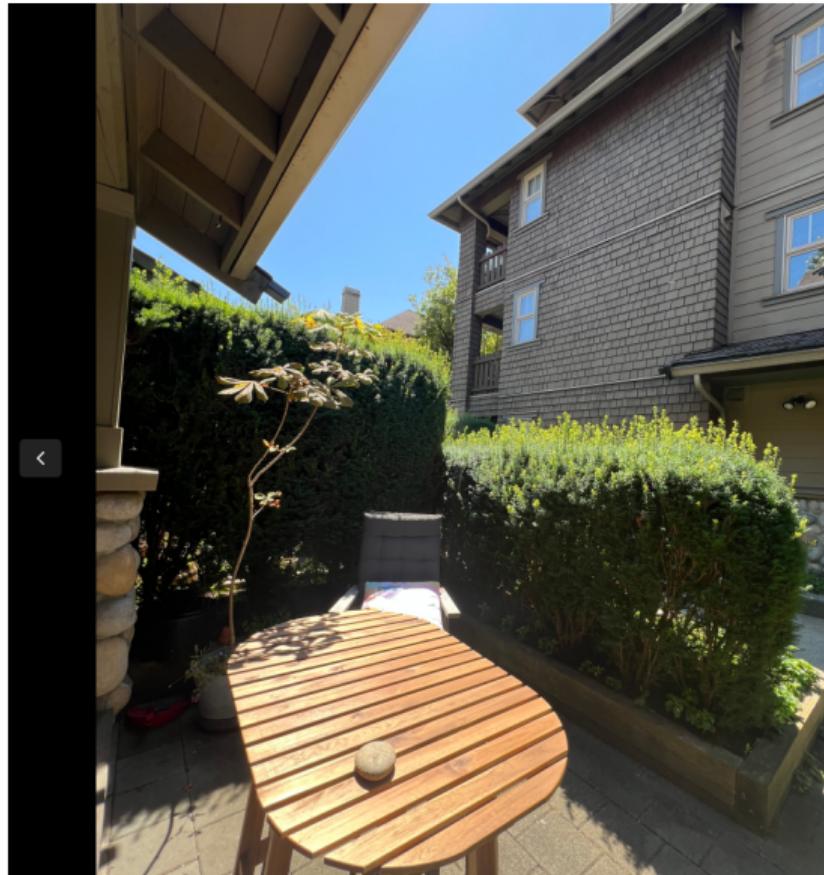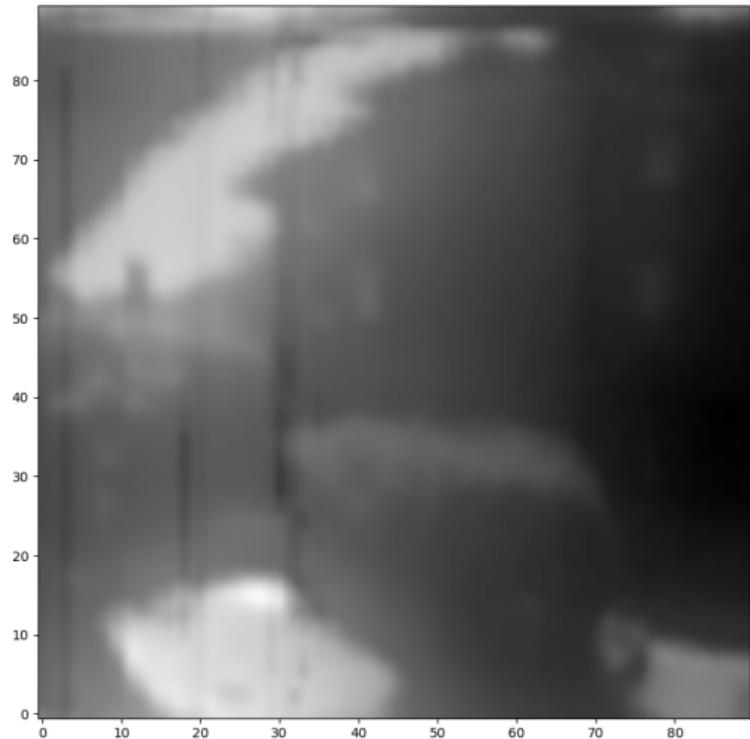

Note: photoresistor instead of photodiode here

```
#include <zephyr/drivers/pwm.h> // if using servomotors  
#include <zephyr/drivers/stepper.h> // if using stepper motors  
#include <zephyr/drivers/adc.h> // measure the light intensity
```


Photons -> Photonics

Much more than just video:

-> Gas detection/characterization, i.e. NDIR CO₂ sensors


Industrial, safety, medical use-cases.

Since 1958: measuring Earth atmospheric CO₂ with "1-pixel image sensors"

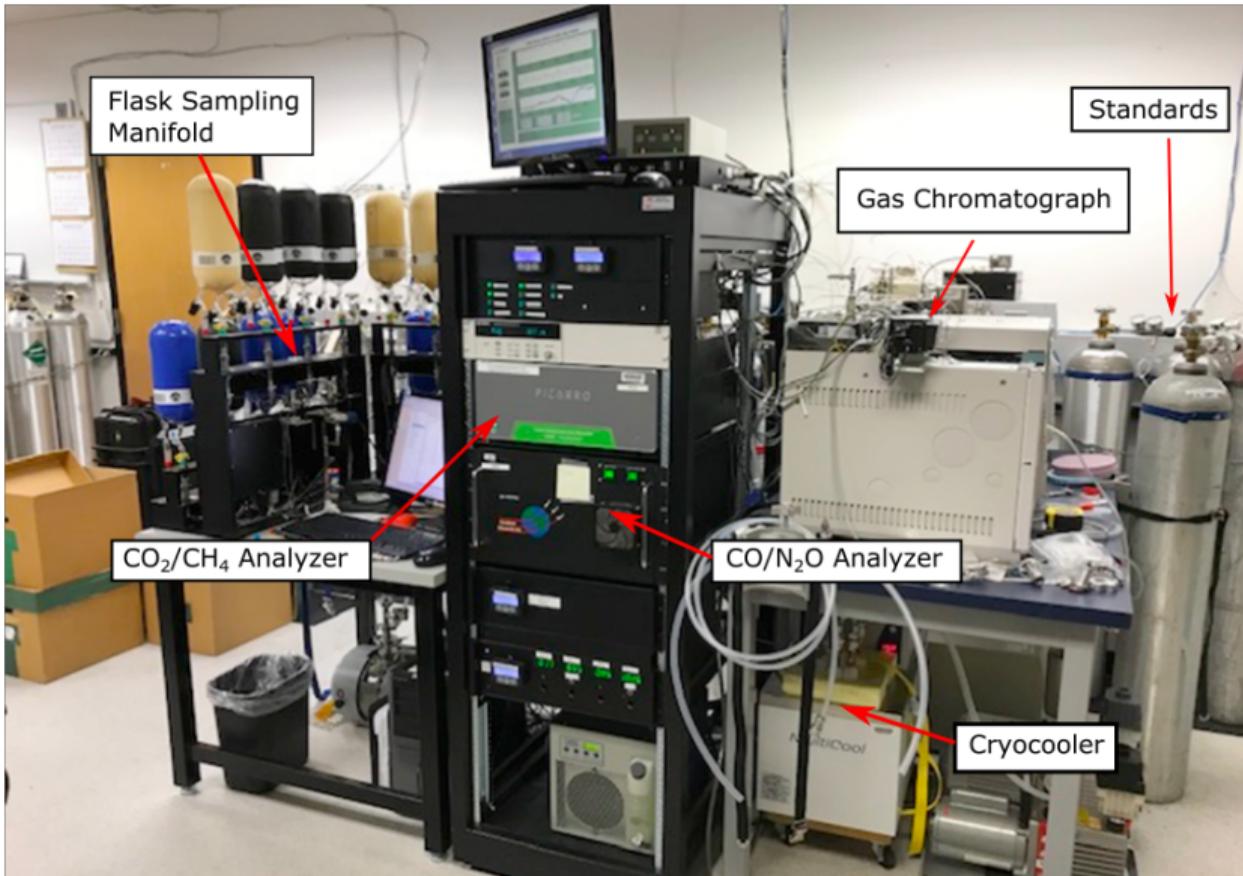

-> Biology/medical research, i.e. DNA sequencing

MPPC® (multi-pixel photon counter)

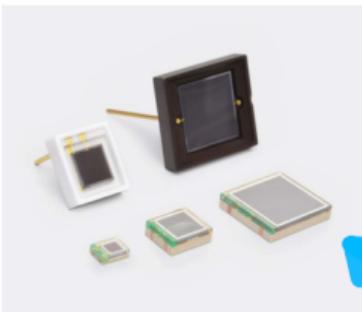

S13360 series

MPPCs for precision measurement

MPPC is a type of device called SiPM (silicon photomultipliers). It is a new type of photon counting device that consists of multiple Geiger mode APD (avalanche photodiode) pixels. It is an opto-semiconductor with outstanding photon counting capability and low operating voltage and is immune to the effects of magnetic fields.

The S13360 series are MPPCs for precision measurement. The MPPCs inherits the superb low afterpulse characteristics of previous products and further provide lower crosstalk and lower dark count. They are suitable for precision measurement, such as flow cytometry, DNA sequencer, laser microscope, and fluorescence measurement, that requires low noise characteristics.

Features

- Reduced crosstalk and dark count
(compared to previous products)
- Outstanding photon counting capability (outstanding photon detection efficiency versus numbers of incident photons)
- Compact
- Operates at room temperature
- Low voltage ($V_{DD} = 53$ V typ.) operation

Applications

- Fluorescence measurement
- Laser microscopes
- Flow cytometry
- **DNA sequencers**
- Environmental analysis
- Various academic research


Sensing voltage: not a very Linux thing to do...

Multiple sensors on a line

Line sensors: single cameras.

External systems measure responsible the voltage. Sensing one pixel at a time, scanning through them fast.

MPPC® (multi-pixel photon counter)

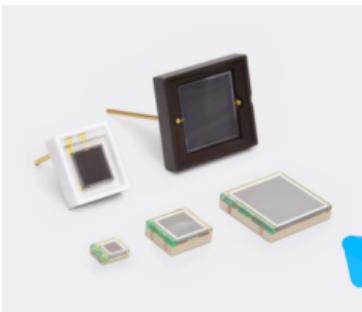

S13360 series

MPPCs for precision measurement

MPPC is a type of device called SiPM (silicon photomultipliers). It is a new type of photon counting device that consists of multiple Geiger mode APD (avalanche photodiode) pixels. It is an opto-semiconductor with outstanding photon counting capability and low operating voltage and is immune to the effects of magnetic fields.

The S13360 series are MPPCs for precision measurement. The MPPCs inherits the superb low afterpulse characteristics of previous products and further provide lower crosstalk and lower dark count. They are suitable for precision measurement, such as flow cytometry, DNA sequencer, laser microscope, and fluorescence measurement, that requires low noise characteristics.

Features

- Reduced crosstalk and dark count
(compared to previous products)
- Outstanding photon counting capability (outstanding photon detection efficiency versus numbers of incident photons)
- Compact
- Operates at room temperature
- Low voltage ($V_{DD} = 53$ V typ.) operation

Applications

- Fluorescence measurement
- Laser microscopes
- Flow cytometry
- **DNA sequencers**
- Environmental analysis
- Various academic research

Requires a fast ADC, i.e. ADI, contributing Zephyr RTOS

Multiple lines

An image sensor, at last!

Line scanning hyperspectral.

Doing imaging but without a machine at the other end: computer vision.

Tools that can be used for building video systems: hardware to access the sensors implement all of that chain

-> Difficulty of embedded video: accessing parallel port or MIPI ->
Can use adapter chips like Himax WiseEye2 (Zephyr port might be coming too)

What comes out of an image sensor

Dark (no auto-exposure) Green (no color correction)

Steps of an ISP.

Why an ISP is useful for robotics?

-> Get always values within same range -> Poor exposure: no data at all -> Defisheye -> Avoid artefacts to trigger a detection on the NPU or other vision algorithm

Conclusion: A lot to handle to get a reasonable image out of a sensor!


Hardware that can help accessing this image.

What it takes...

What would it take to build various devices on Zephyr

!! disclaimer: hardware is hard !! !! disclaimer: not everything supported !!

What it takes... Spectrophotometer

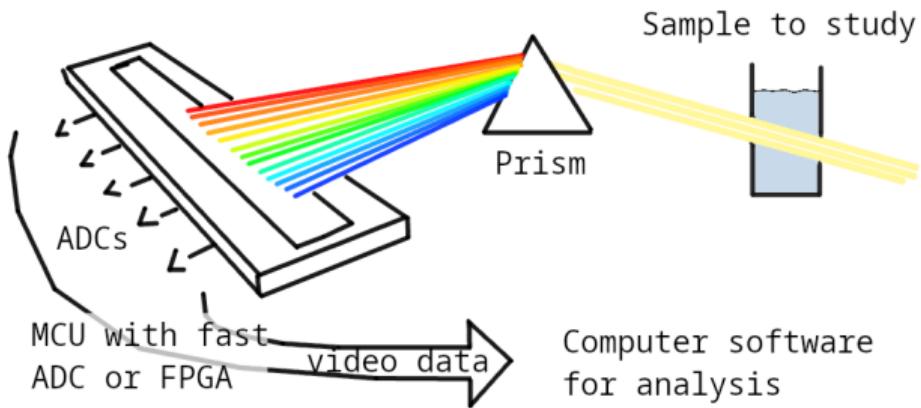



Need a very fast ADC! Not many board will have one...

=> Good to have a lot of options.

FPGAs are often used for this: Zephyr support depends on the soft SoC used.



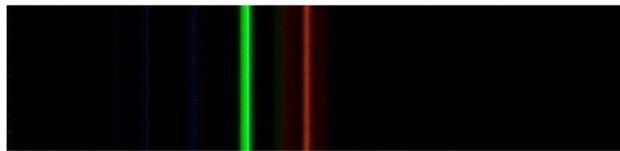

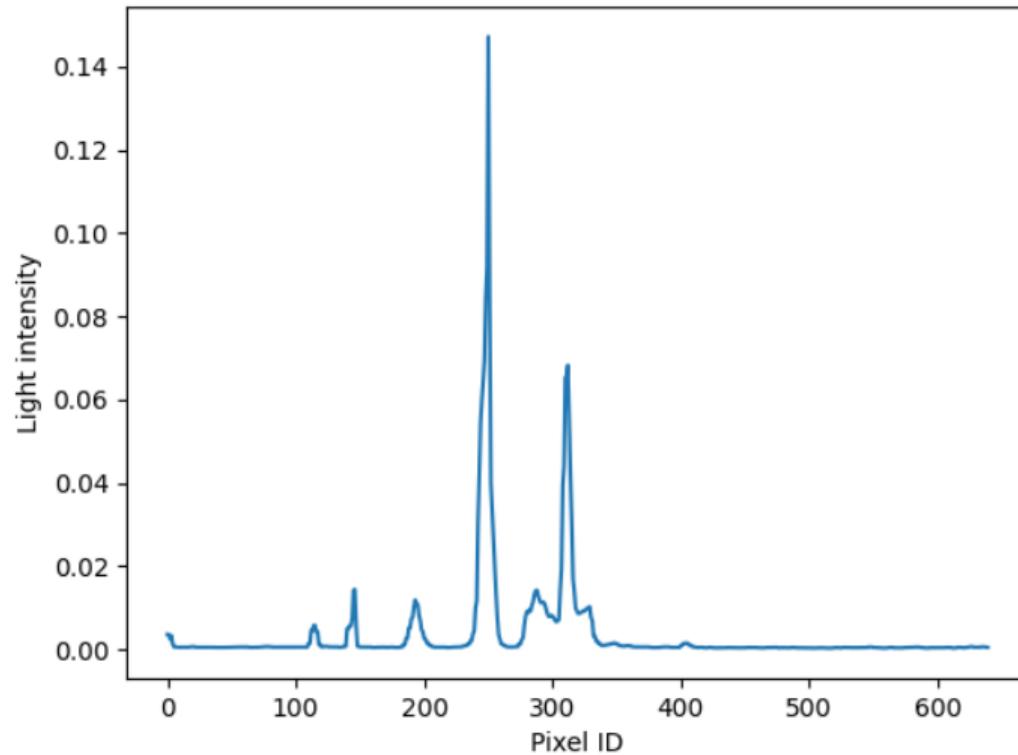

What it takes... Drones

VMU RT1170

Overview


The VMU RT1170 features an i.MX RT1176 dual core MCU with the Cortex-M7 core at 1 GHz and a Cortex-M4 at 400 MHz. The i.MX RT1176 MCU offers support over a wide temperature range and is qualified for consumer, industrial and automotive markets. The VMU RT1170 is the default VMU for CogniPilot's Cerebri, a Zephyr RTOS based Autopilot.

Hardware

- MIMXRT1176DVMAA MCU
 - 1GHz Cortex-M7 & 400Mhz Cortex-M4
 - 2MB SRAM with 512KB of TCM for Cortex-M7 and 256KB of TCM for Cortex-M4
- Memory
 - 512 Mbit Octal Flash
 - TF socket for SD card
- Ethernet
 - 2 wire 100BASE-T1
- USB
 - USB 2.0 connector
- Power
 - Redundant dual picoflex power ports
- Debug
 - 10 pin debug and shell adapter board to 20 Pin JTAG debugger and USB-C shell
- Sensors



Theremino NDVI - V2.4

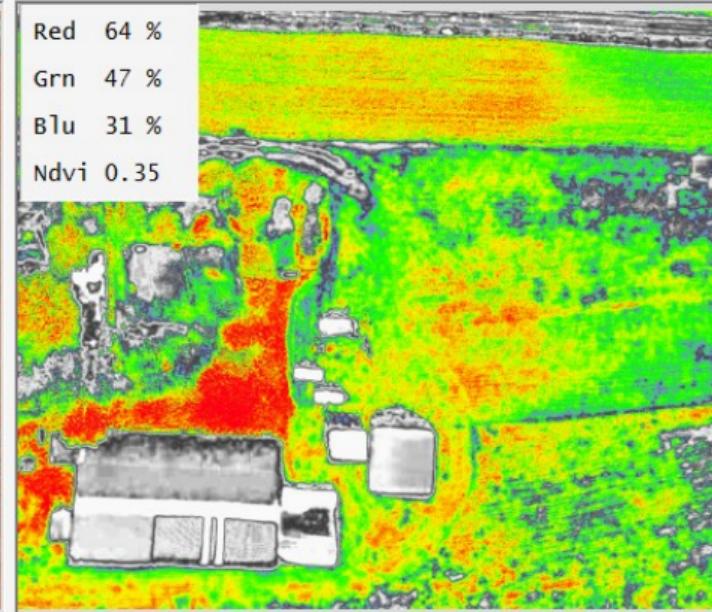

-0,07

0,50

Ir=R Vis=B

50
Max

Load image

Load false colors

NDVI
multiple

NDVI

Histogram

-7
Min

Double click on images to open them with the default application

What it takes... Yeast monitoring station

Monitoring process of beer, kombucha, lactic fermentation

Video but also...

CO2 polling for building charts.

LED API for illuminating when taking a capture.

Wi-Fi to the home router.

HTTP client for sending the results.

What it takes... Endoscopes

Cameras usged by surgeons


Example of real endoscope camera module (CAMEMAKE):




Image sensor driver

Video transfer driver <-> Video APIs <-> UVC


Parallel
port

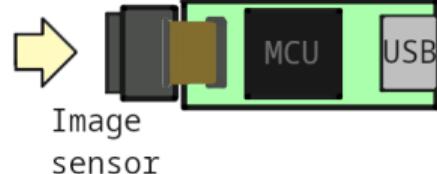

What it takes... Wi-Fi Smartglasses

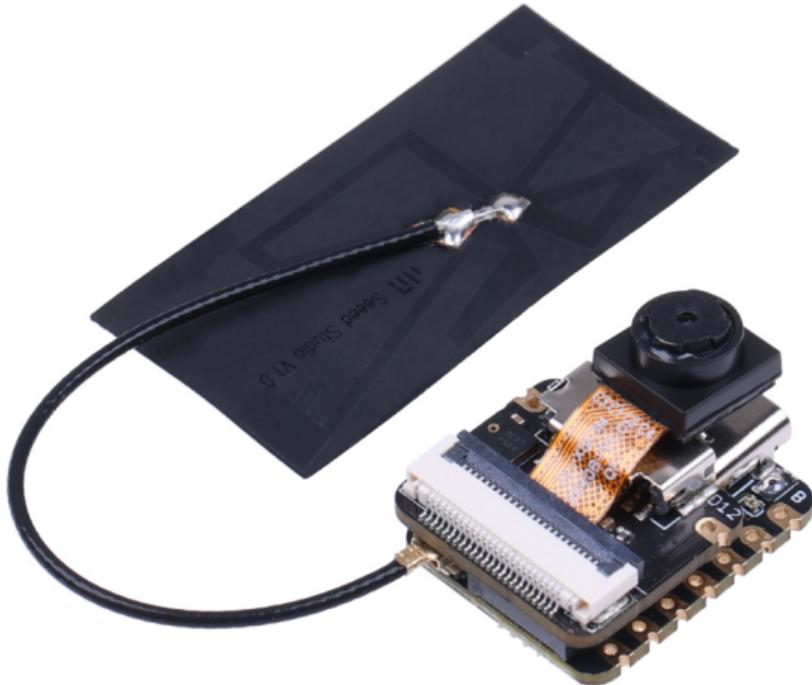

What it takes... Bluetooth Smartglasses

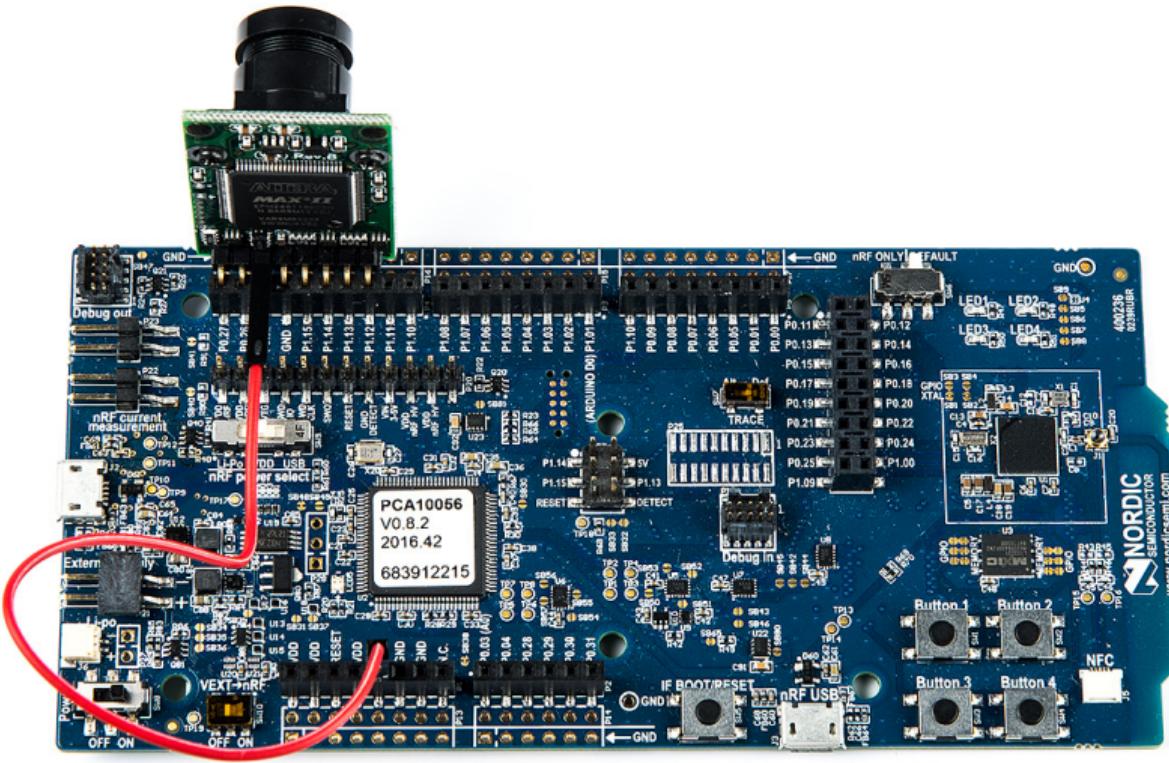

Pre-Zephyr Nordic era: needs conversion.

Any MCU with
Bluetooth

↔
SPI

Himax HM0360
(not yet supported)



640x480

Beyond Zephyr: ecosystem around it

What UVC adds to the table:

- > **Linux interoperability**

- Standardize all the video controls with Linux

- > ROS2: integration of robotics (via USB cameras)

- > OpenCV (via USB cameras)

- > **USB camera protocol supported on Linux, Windows, MacOS, Android, iPad (not iOS yet), BSDs, 9front, QNX...**

- Laptop lid cameras

=> **Want to support a new sensor on any ecosystem?**

Bring Zephyr support, and now it's everywhere