
PRODUCT SPECIFICATION GUIDE

BTE HEARING AIDS

5118

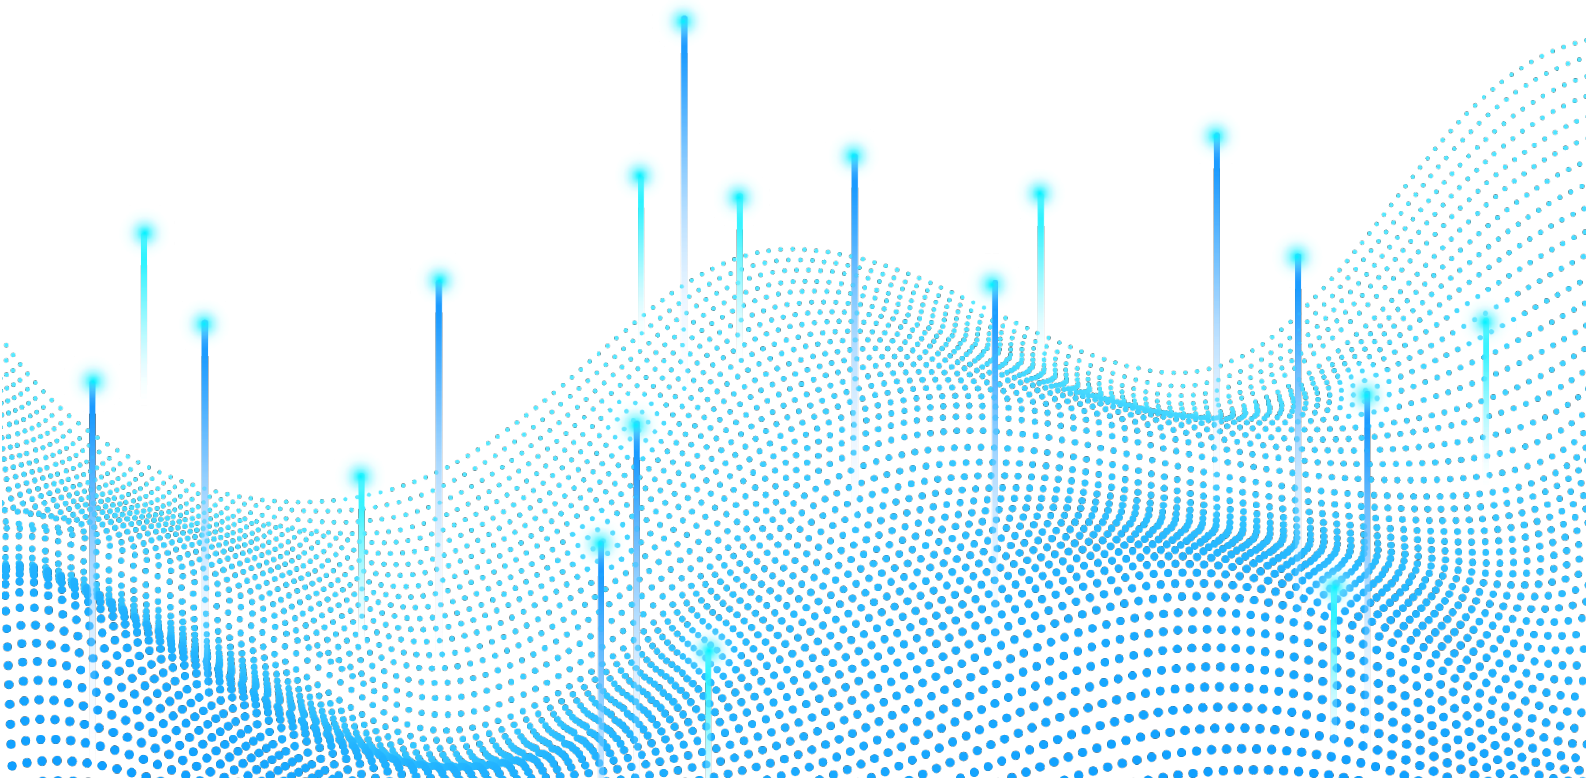

SPECIFICATIONS

BASIC PARAMETERS



Binaural (Pair)

5118L (Low Gain)

Maximum Output (OSPL90)	⩽109+3dBSPL
Average Output (HFA OSPL90)	107±4dBSPL
Peak Gain	42±5dB
Average Gain (HFA FOG)	36±5dB
Frequency Range	⩽400Hz~⩾5000Hz
Total Harmonic Distortion	⩽2%
Equivalent Input Noise	⩽15dB
Working Current	⩽2mA@3.7V



Single Ear

5118H (High Gain)


Maximum Output (OSPL90)	⩽114+3dBSPL
Average Output (HFA OSPL90)	112±4dBSPL
Peak Gain	50±5dB
Average Gain (HFA FOG)	45±5dB
Frequency Range	⩽400Hz~⩾5000Hz
Total Harmonic Distortion	⩽2%
Equivalent Input Noise	⩽15dB
Working Current	⩽2mA@3.7V

Number of WDRC Channels	16 Channels
Battery Type	Rechargeable Lithium Battery
Microphone Type	Silicon Microphone (MEMS)
Speaker Type	Dynamic Iron (Balanced Armature)
Charging Interface	USB Type-C


ADJUSTMENT

GAIN ADJUSTMENT

(1) Gain Curve

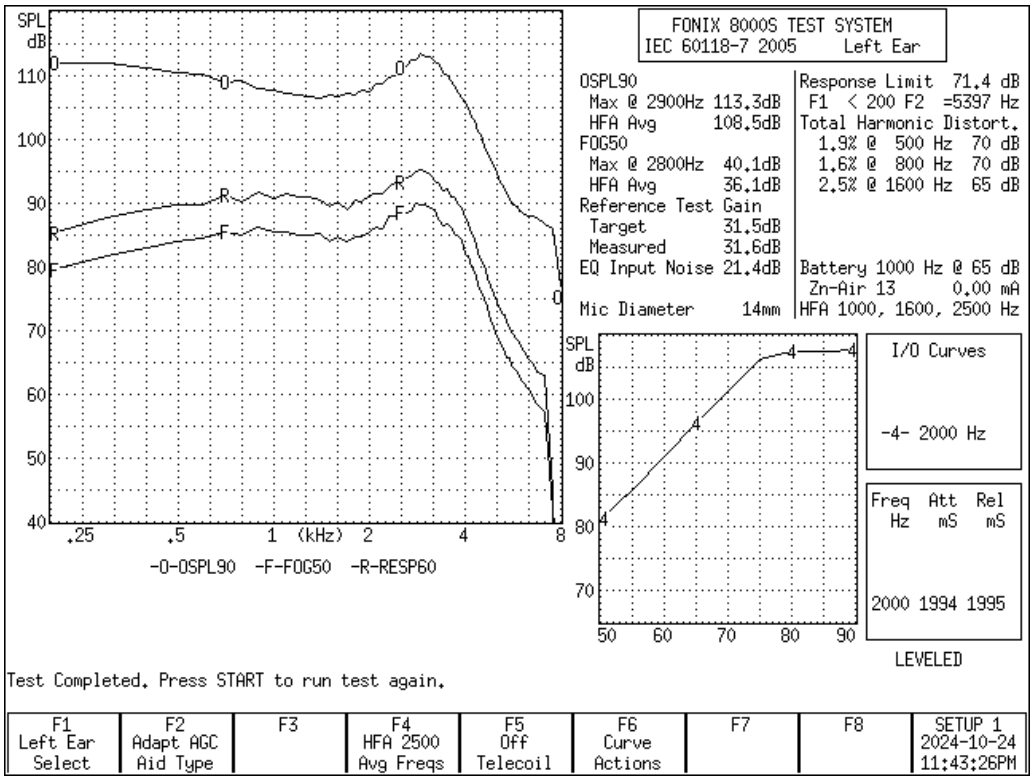

5118L: Low Gain

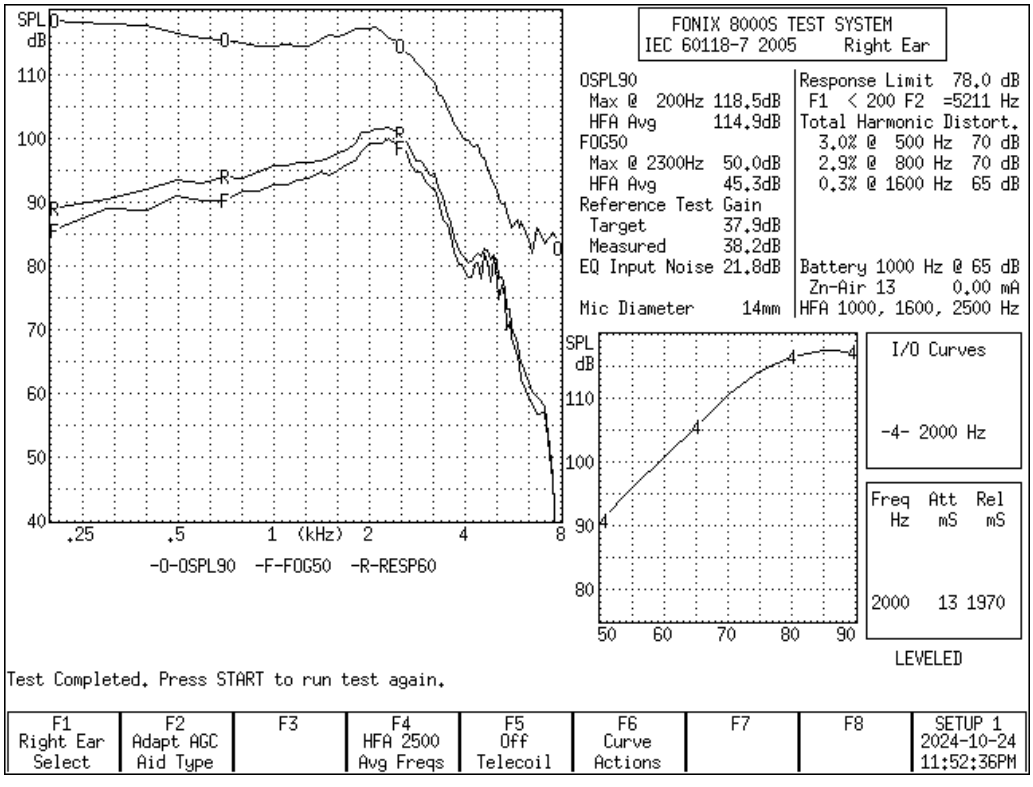

5118H: High Gain

(2) Gain Adjustment Range

5118L: 21dB ~ 36dB

	1档	2档	3档	4档	5档	6档
5118L	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
	21dB	24dB	27dB	30dB	33dB	36dB

(2) Gain Adjustment Range


5118H: 30dB ~ 45dB

	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
5118H	30dB	33dB	36dB	39dB	42dB	45dB


(3) Hearing Loss Range Covered

5118L：轻度 中度 中重度

5118L: Mild, Moderate, Moderately Severe

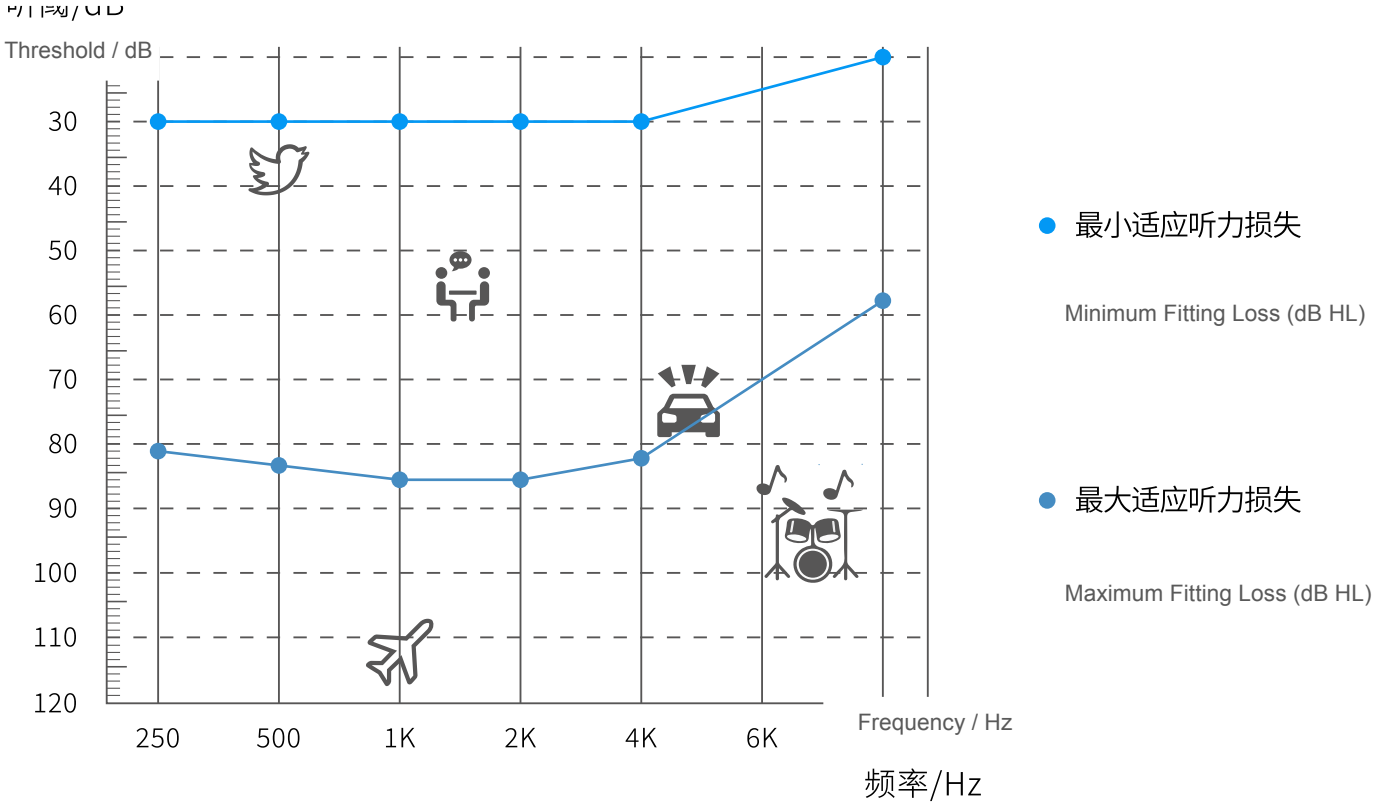

5118H: Mild, Moderate, Moderately Severe, Severe

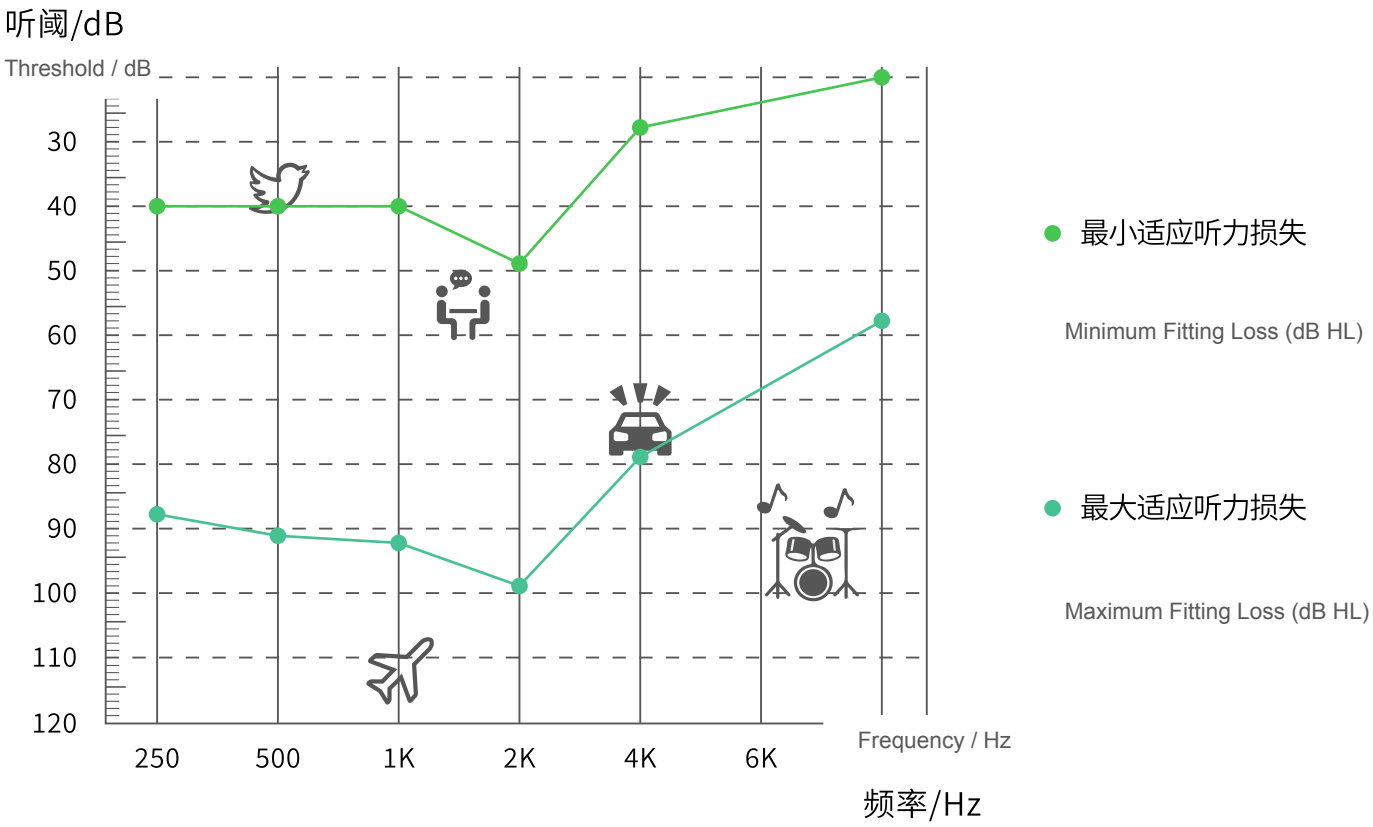

Chirping birds	40dB	Normal conversation	50~60dB
Car horn	70~80dB		

OVERVIEW

FUNCTION OVERVIEW

(1) Bluetooth Information

Type: BLE (Low Energy) Version: V5.3

(2) Operating Instructions and Controls



Power On	Power Off	Volume Up
Press down button for 1 second	Press & hold down button for 6 seconds	Press up button for 1 second
Volume Down	**Switch BT / Hearing**	**Switch Hearing Mode**
Press down button for 1 second	Press & hold down button for 3 seconds	Press & hold up button for 3 seconds

(3) Battery Life and Charging

Hearing Mode

Continuous Use: 15 Hours Total Battery with Case: 52 Hours

Bluetooth Mode

Continuous Use: 6 Hours Total Battery with Case: 21 Hours

Binaural

Charging case battery capacity:
420mAh

Single Ear

Charging case battery capacity:
300mAh

Hearing aid battery capacity:
30mAh


Charging time: 2 Hours	**Recharge cycles with case: 3 Times**

(4) Mobile App Calibration and Fitting

- FIG6 Fitting Formula: Target curves calibrated to international clinical audiology standards.
- 4 Listening Modes: Dedicated presets for General, Indoor, Outdoor, and Tinnitus Masking.
- Volume Adjustment: Independent left/right ear gain adjustment or synchronized binaural control.
- Battery Monitoring: Real-time battery charge percentage display in mobile app.
- Custom Equalizer: Fine-tuning for bass, midrange, and treble (32-band precision processing).

International FIG6 Fitting Formula

Target curve calibration using the FIG6 formula widely used by clinical audiologists worldwide, achieving professional offline clinic-grade fitting quality.

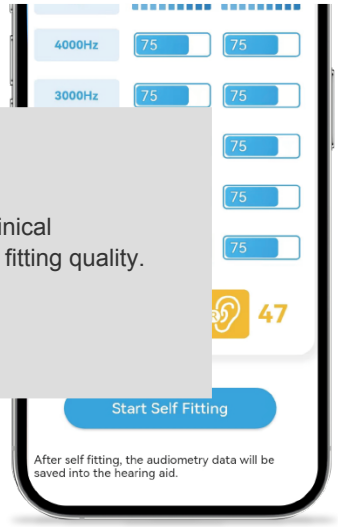

GET IT ON Google Play

Download on the App Store

(5) DSP Architecture

Imported Onsemi Professional Medical-Grade Hearing Aid DSP

Adaptive Wide Dynamic Range Compression (WDRC)	
Noise Suppression Algorithm	Acoustic Feedback Cancellation (AFC)
Transient Loud Sound Blocking (MPO)	Wind Noise Suppression
Adaptive Directional Microphone	Intelligent Volume Learning
Tinnitus Masker Therapy	Clinical Data Logging
Adaptive Environment Management	Real-Time Sound Analysis Demo

COLORS

COLOR SELECTION

Binaural (Pair)



White + Skin Color



Black + Silver Gray

Single Ear



White + Skin Color



White + Silver Gray

More colors and finishes available upon request

DIMENSIONS


SIZE AND WEIGHT

Binaural (Pair)








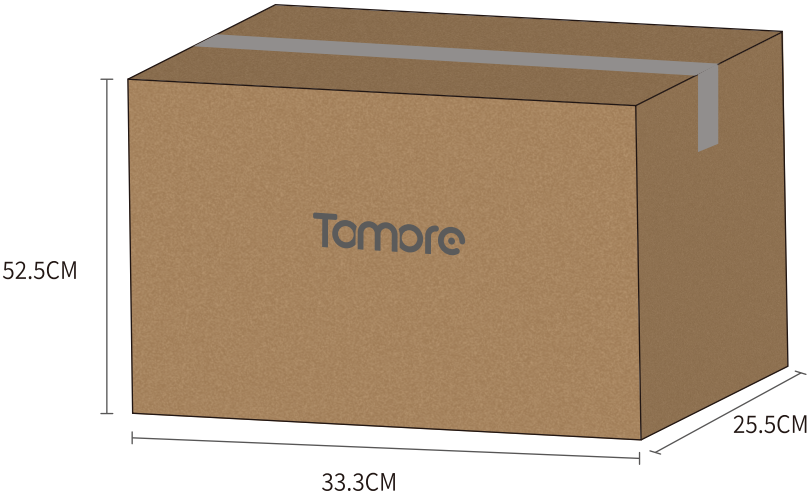

	Length	Width	Height	Weight	
Hearing Aid	45MM	8.5MM	12.7MM	4.3G	**50 pcs / ctn**
Charging Case	48MM	80MM	35MM	68.3G	
Packaging Box	160MM	100MM	46MM	275G	
Master Carton	52.5CM	33.3CM	25.5CM	13KG	

Single Ear

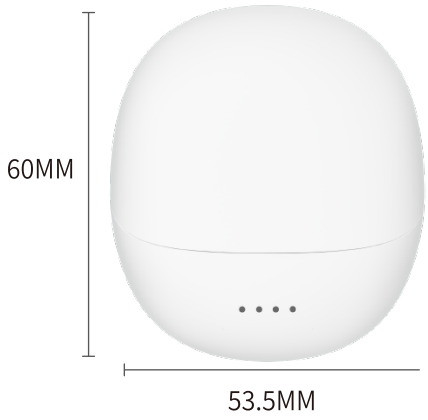





	Length	Width	Height	Weight	
Hearing Aid	45MM	8.5MM	12.7MM	4.3G	**72 pcs / ctn**
Charging Case	48MM	80MM	35MM	35.5G	
Packaging Box	160MM	100MM	46MM	170G	
Master Carton	52.5CM	33.3CM	25.5CM	12KG	