






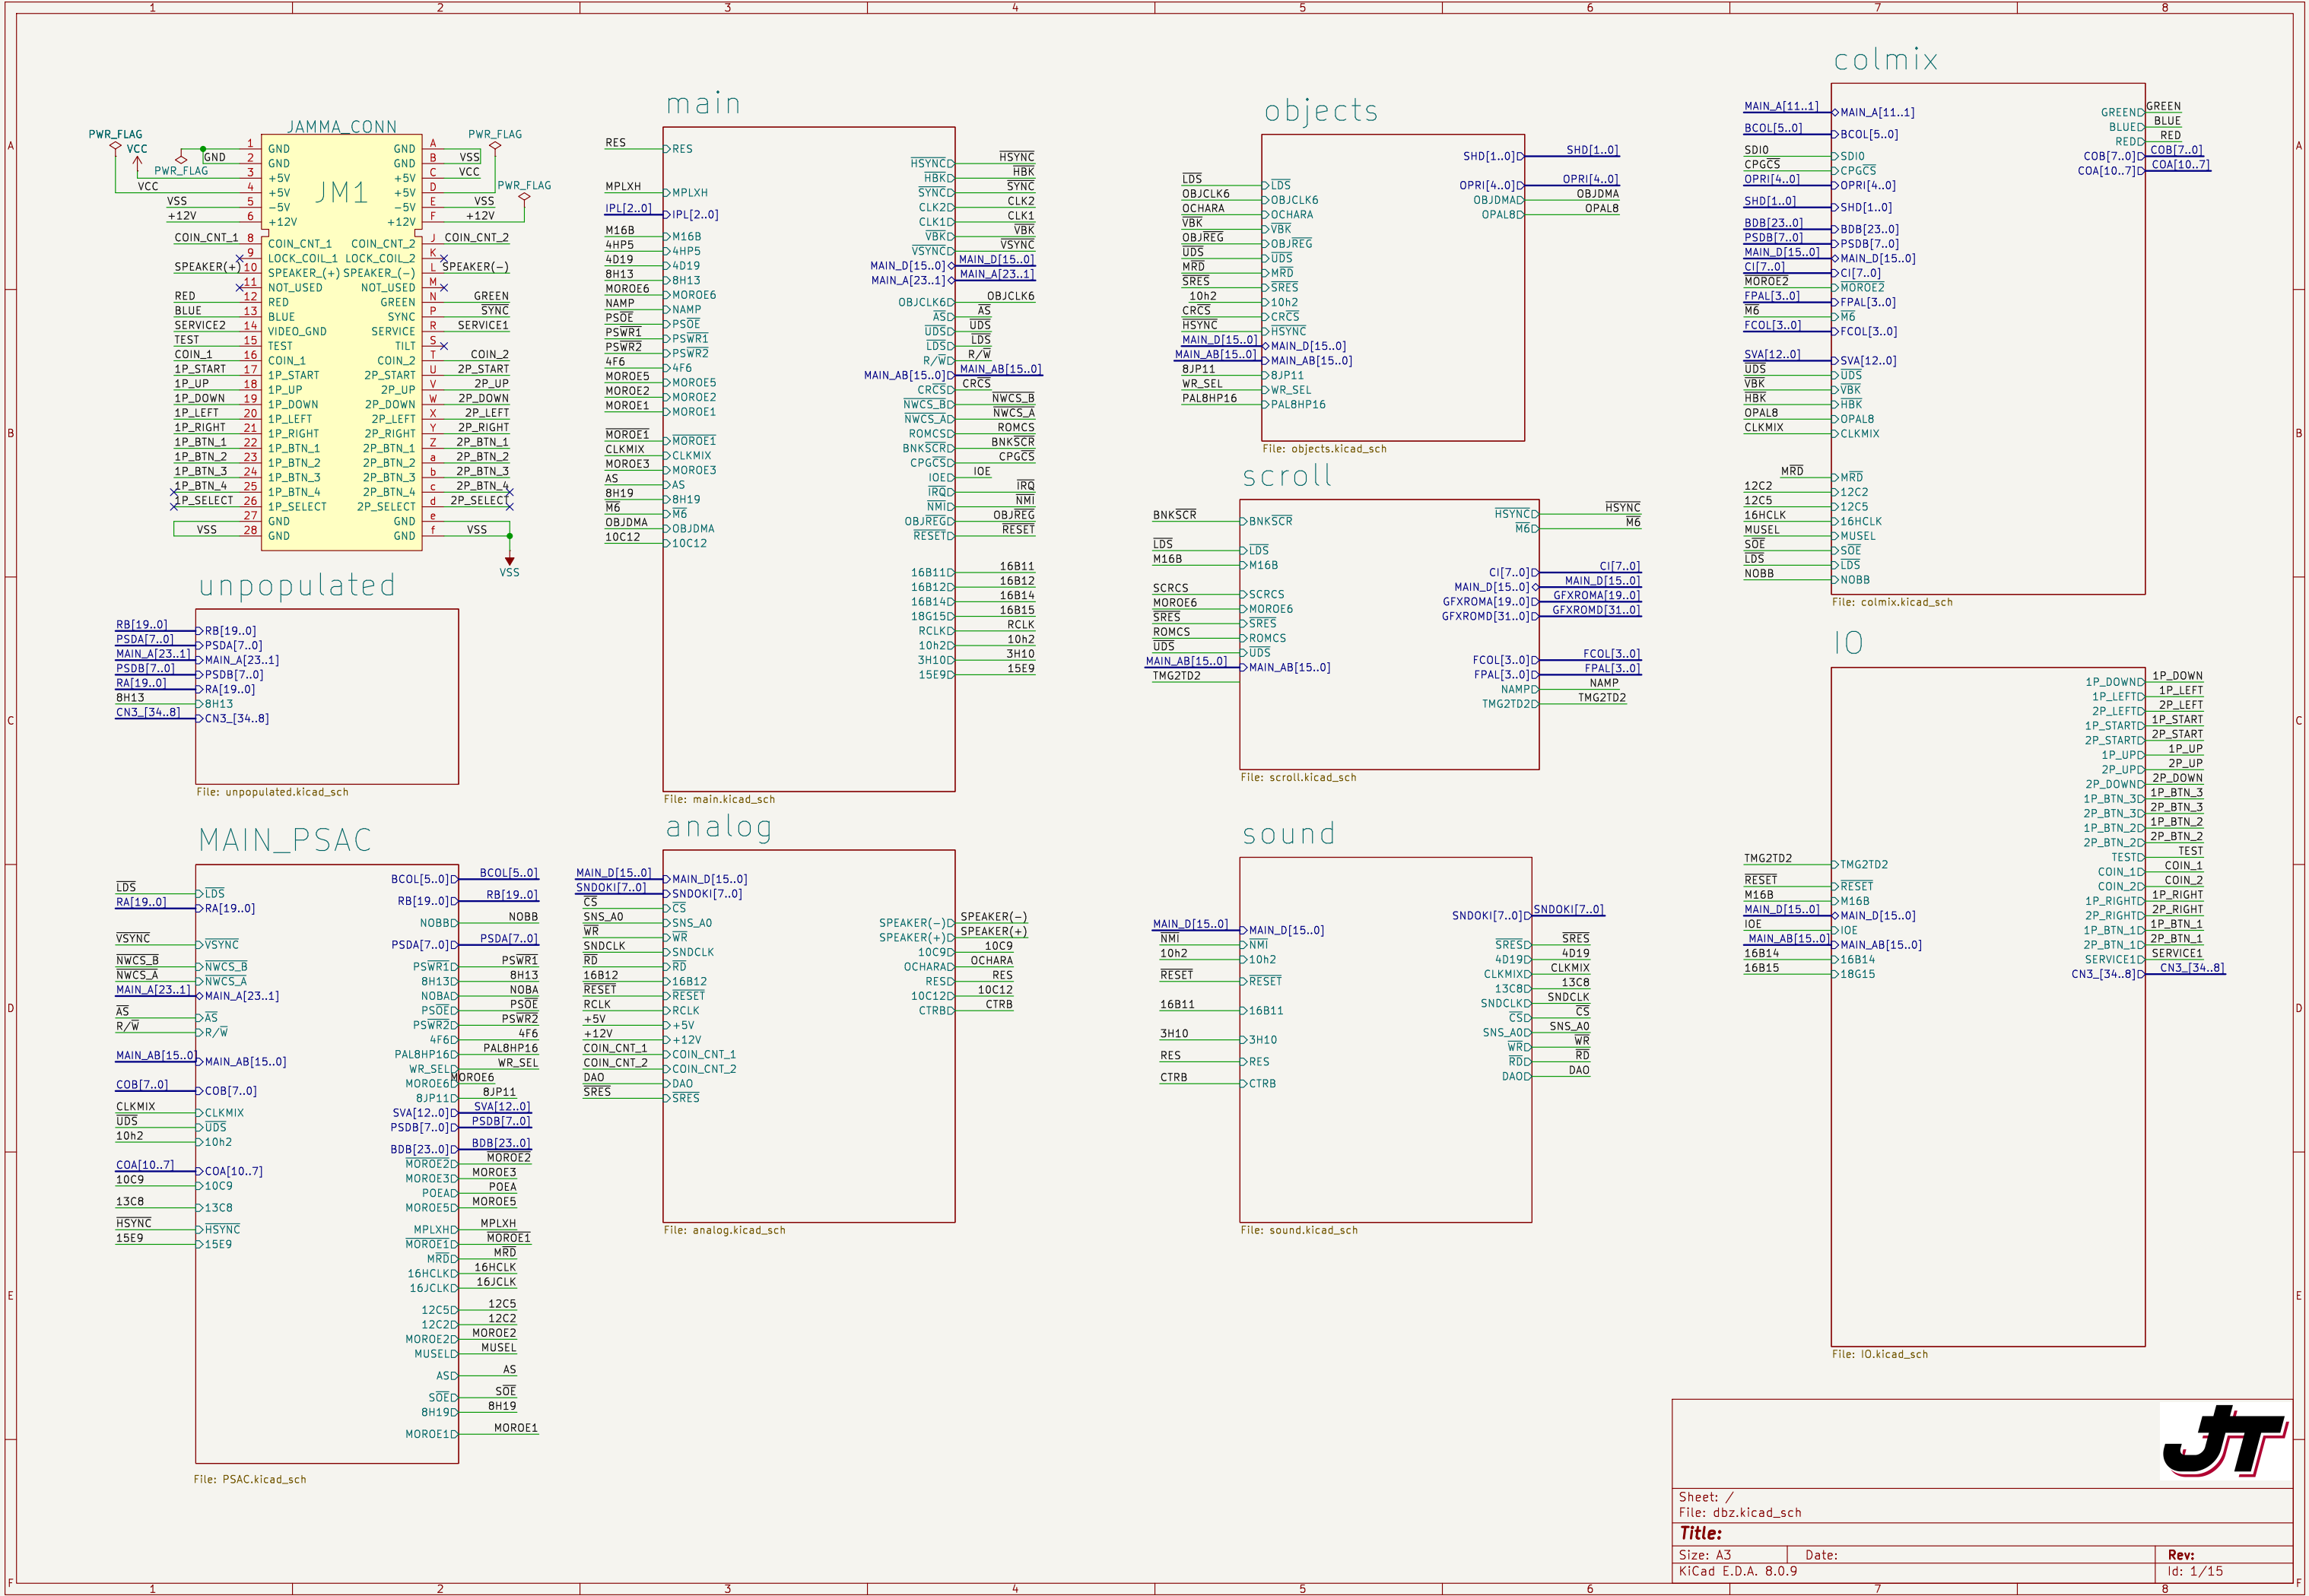


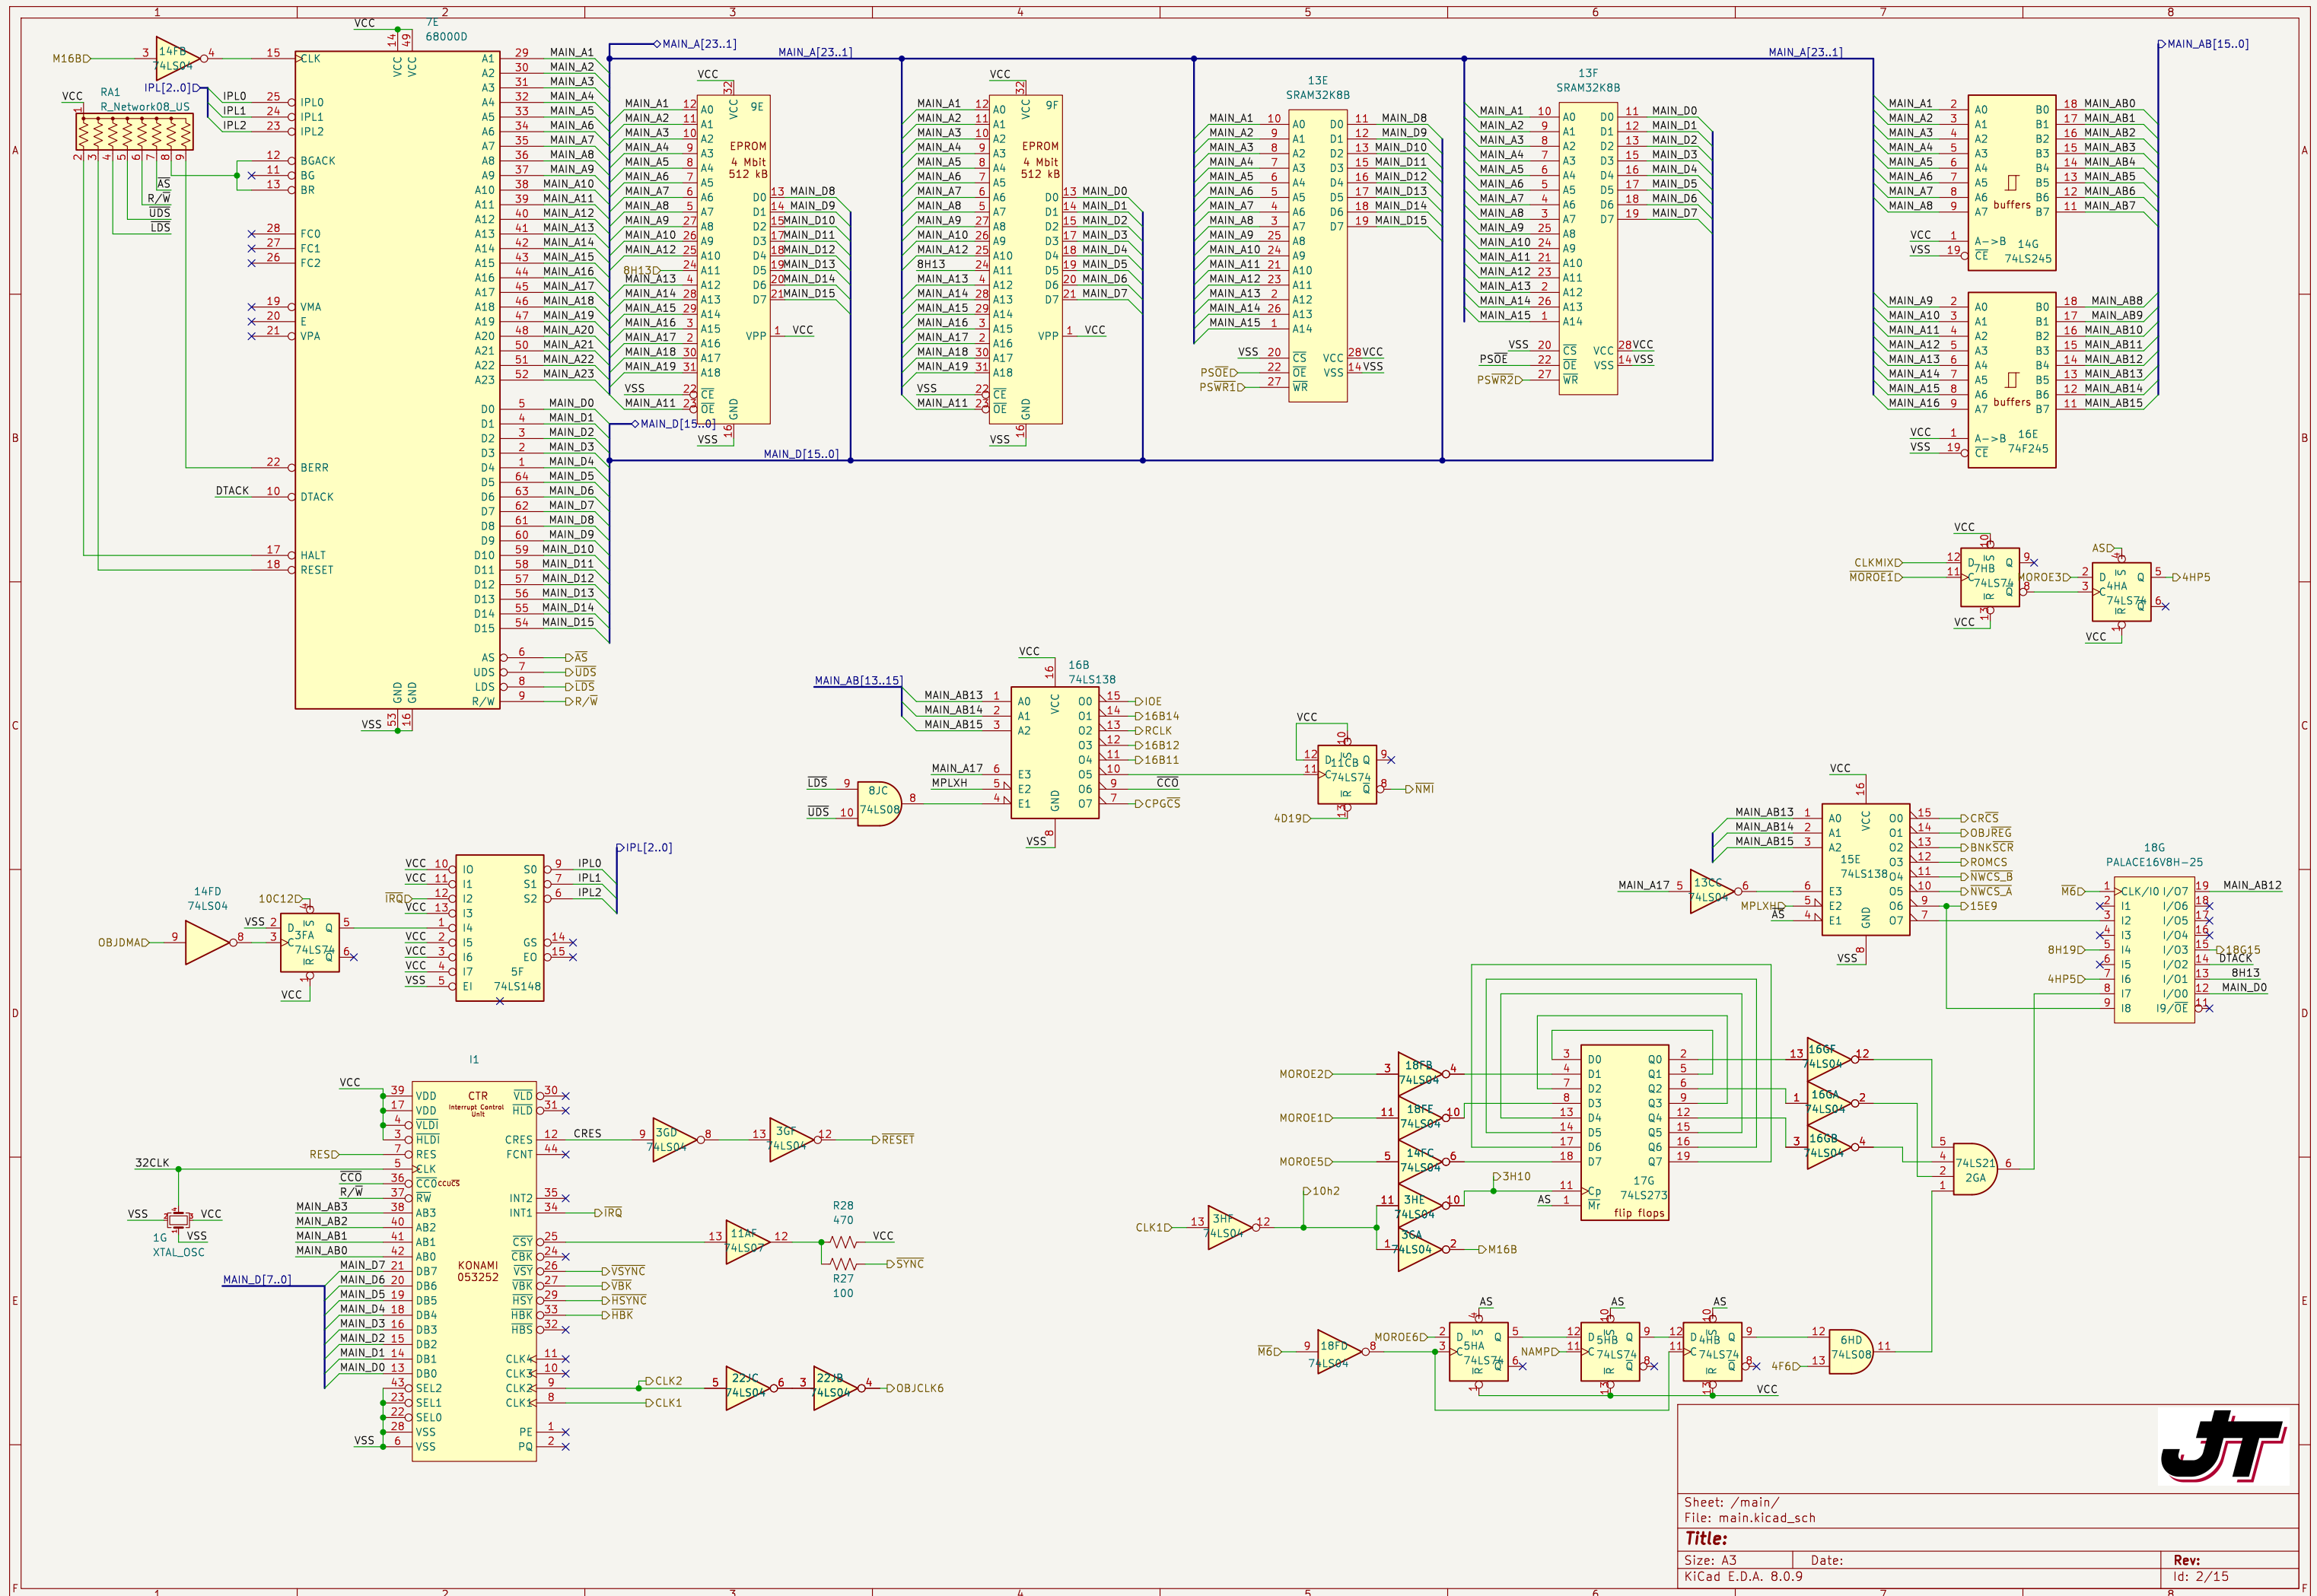

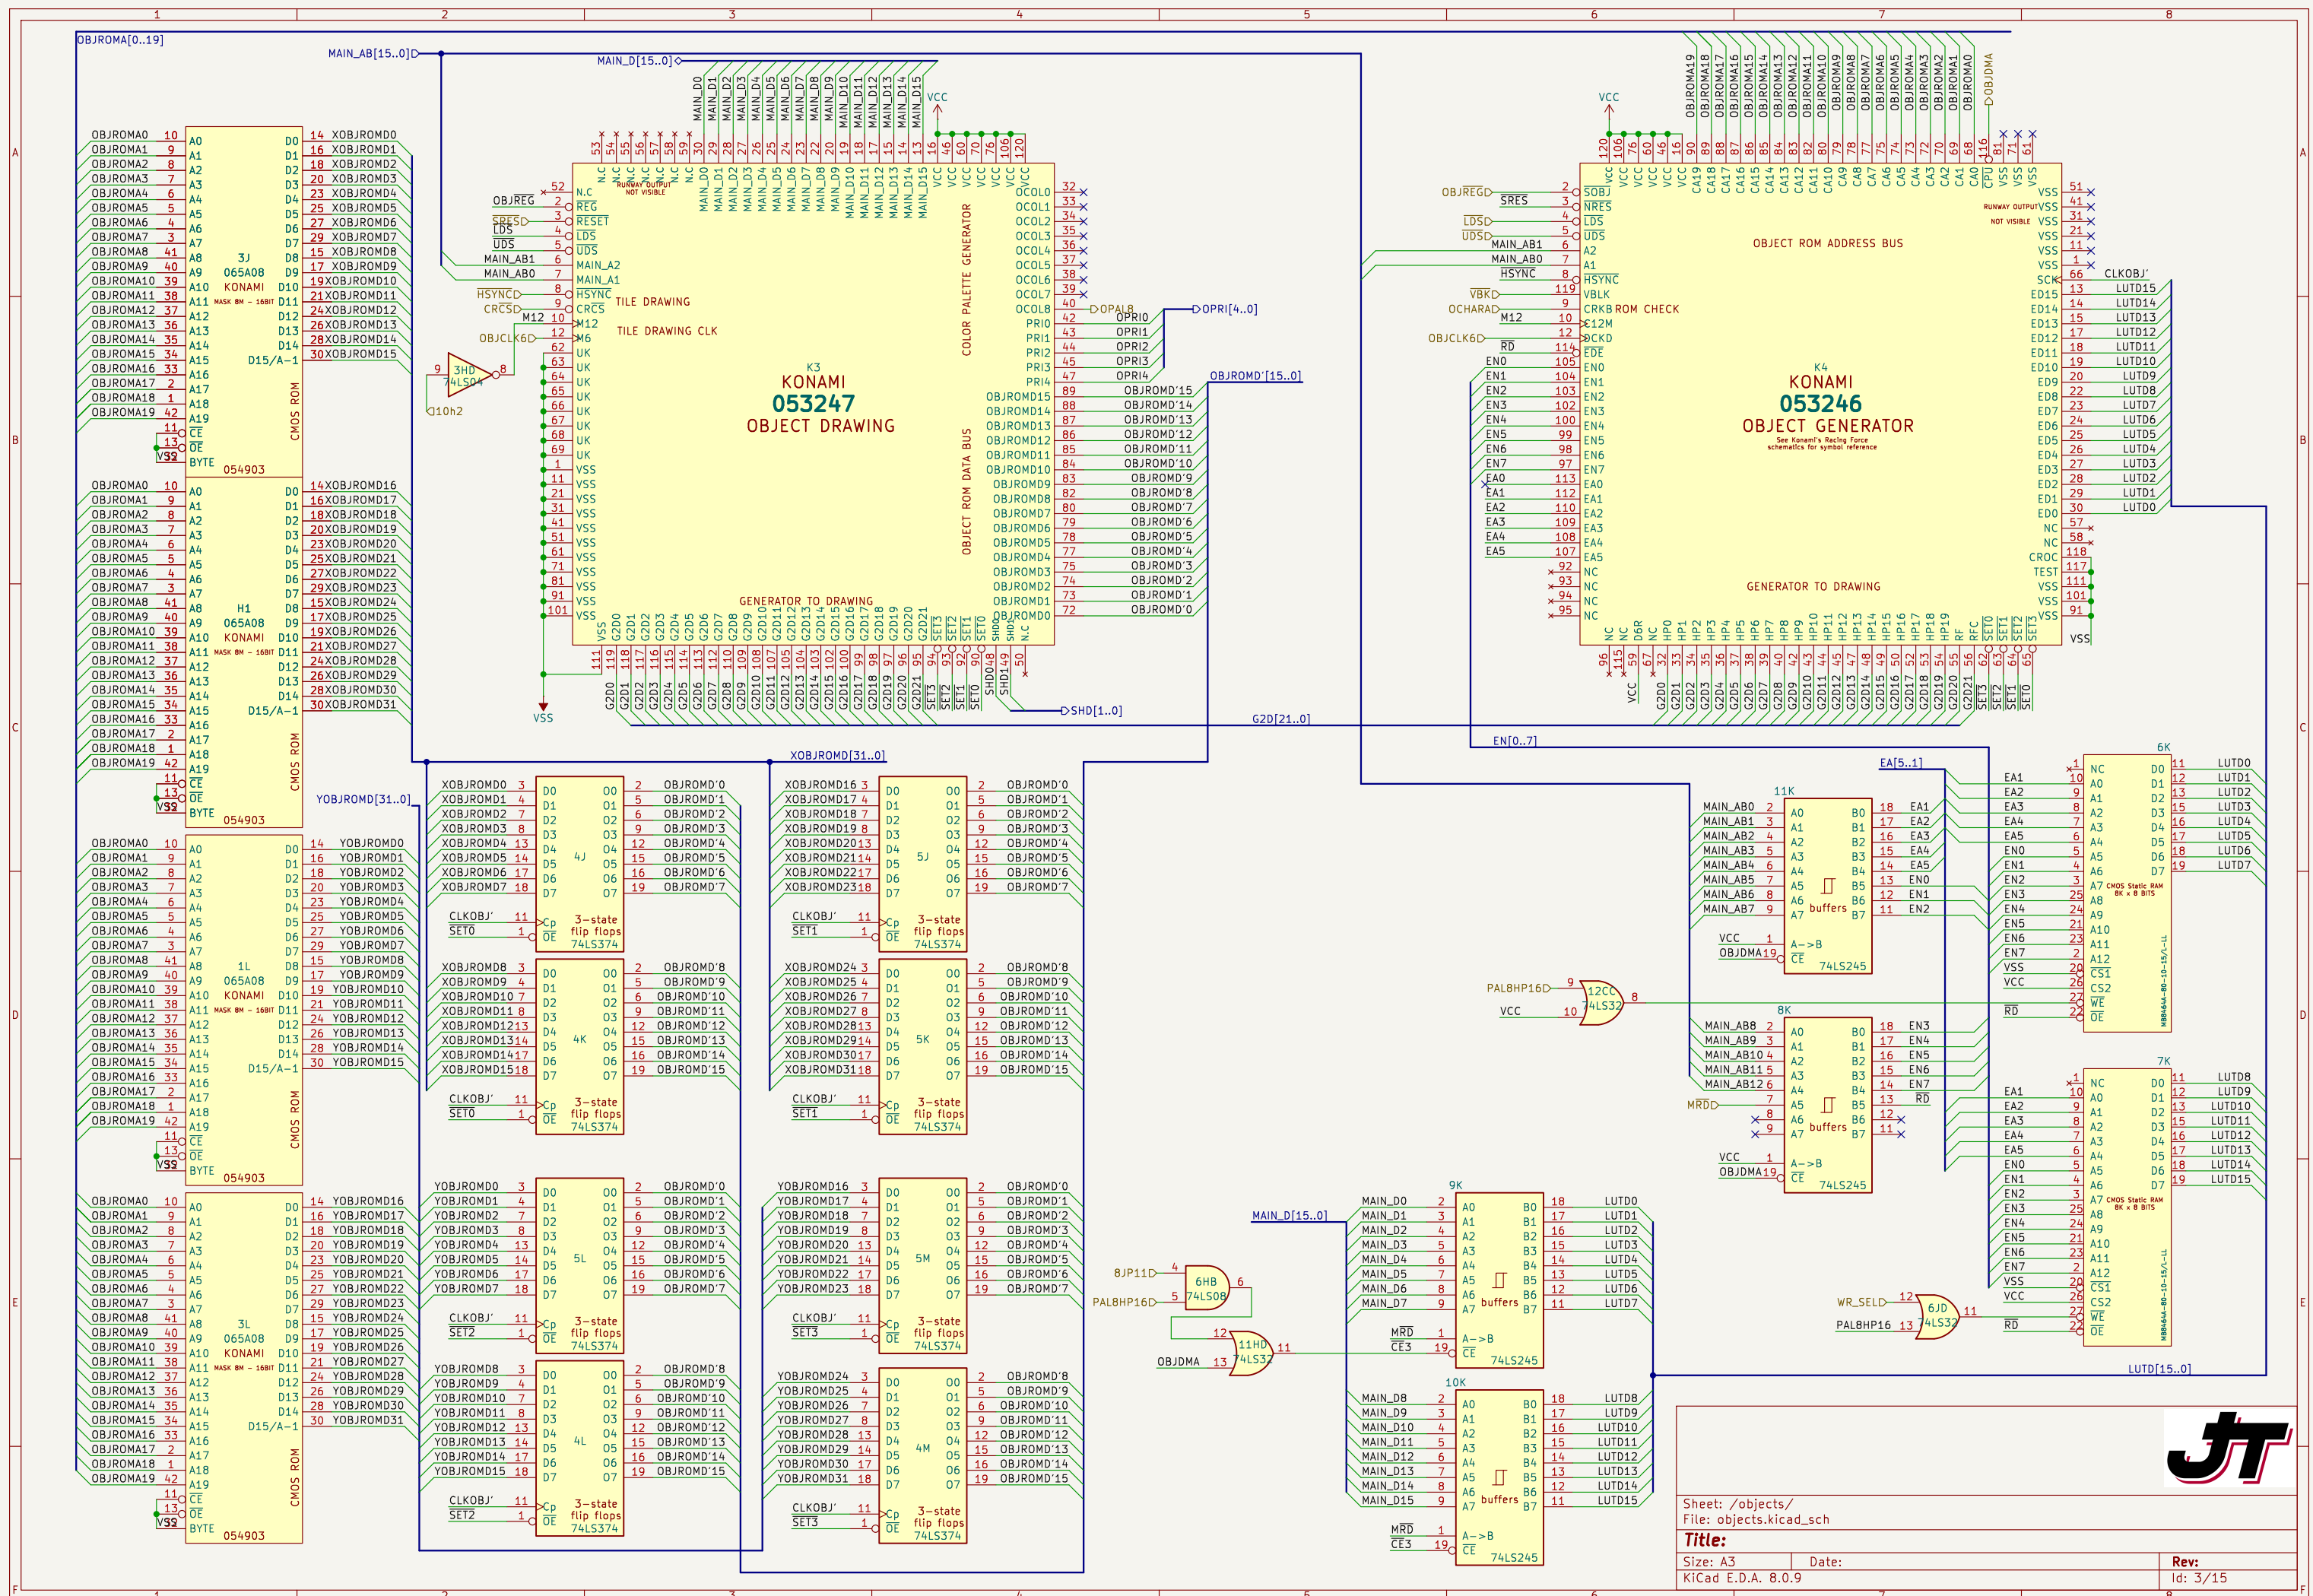

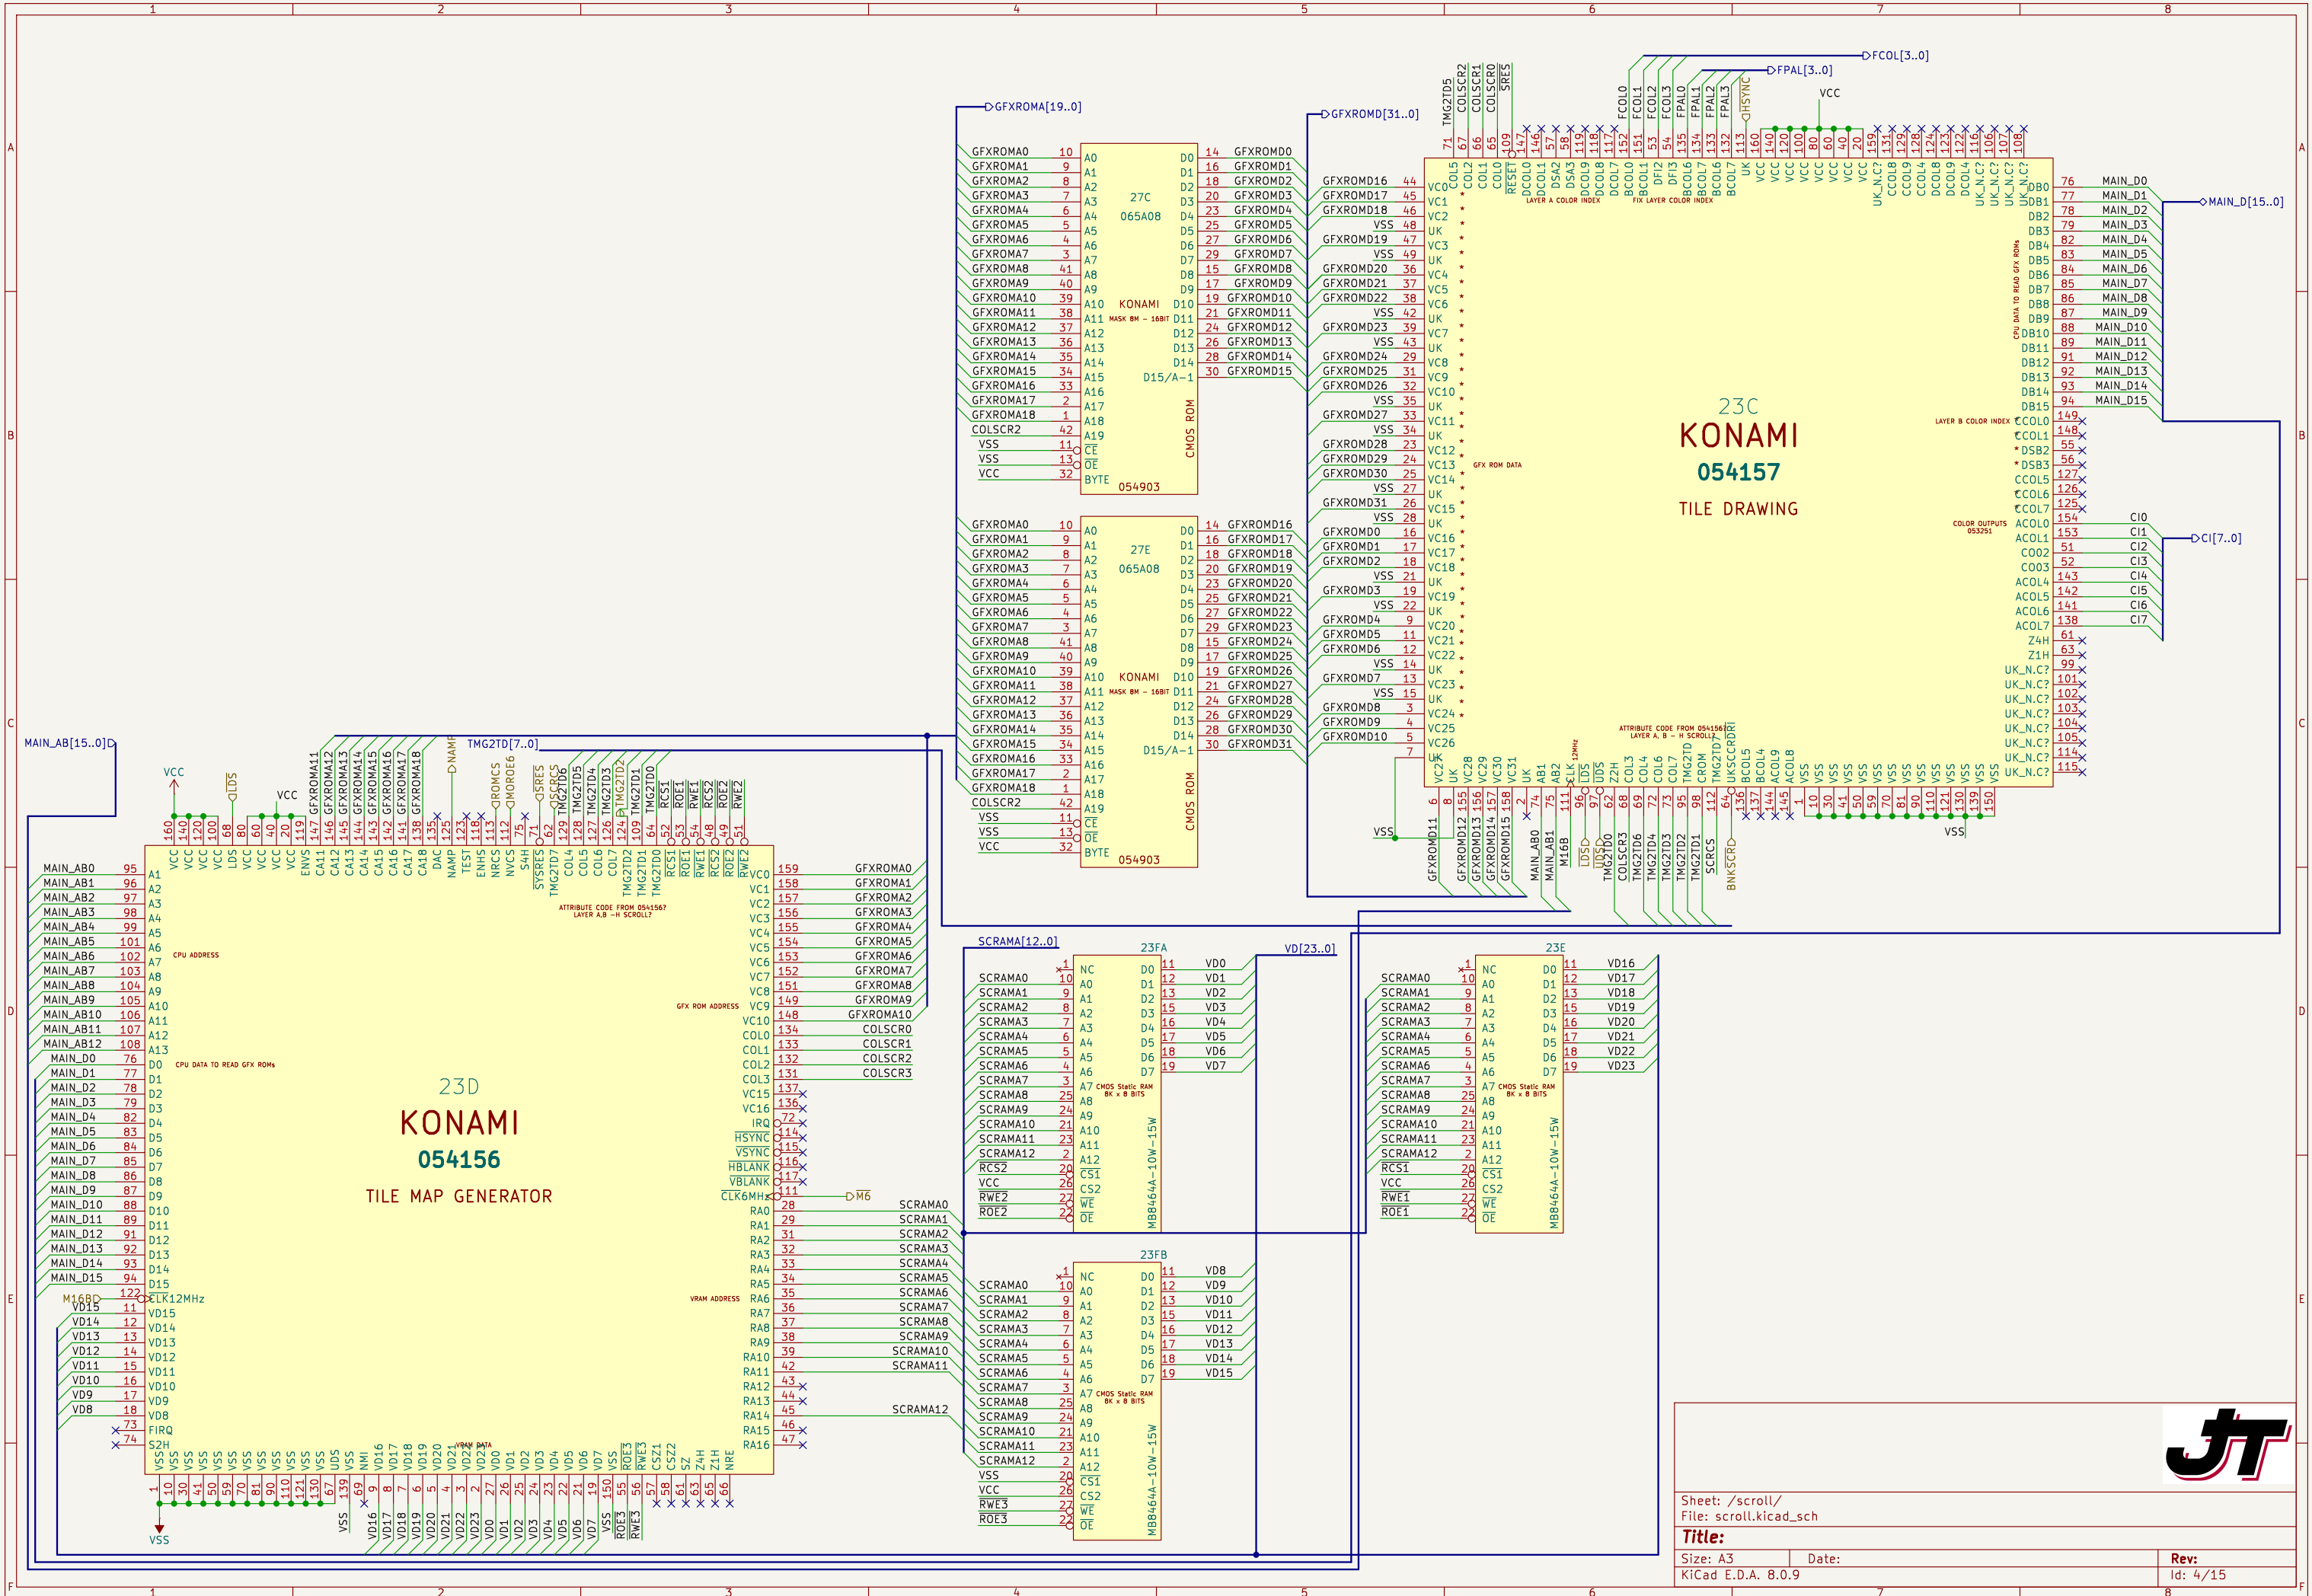


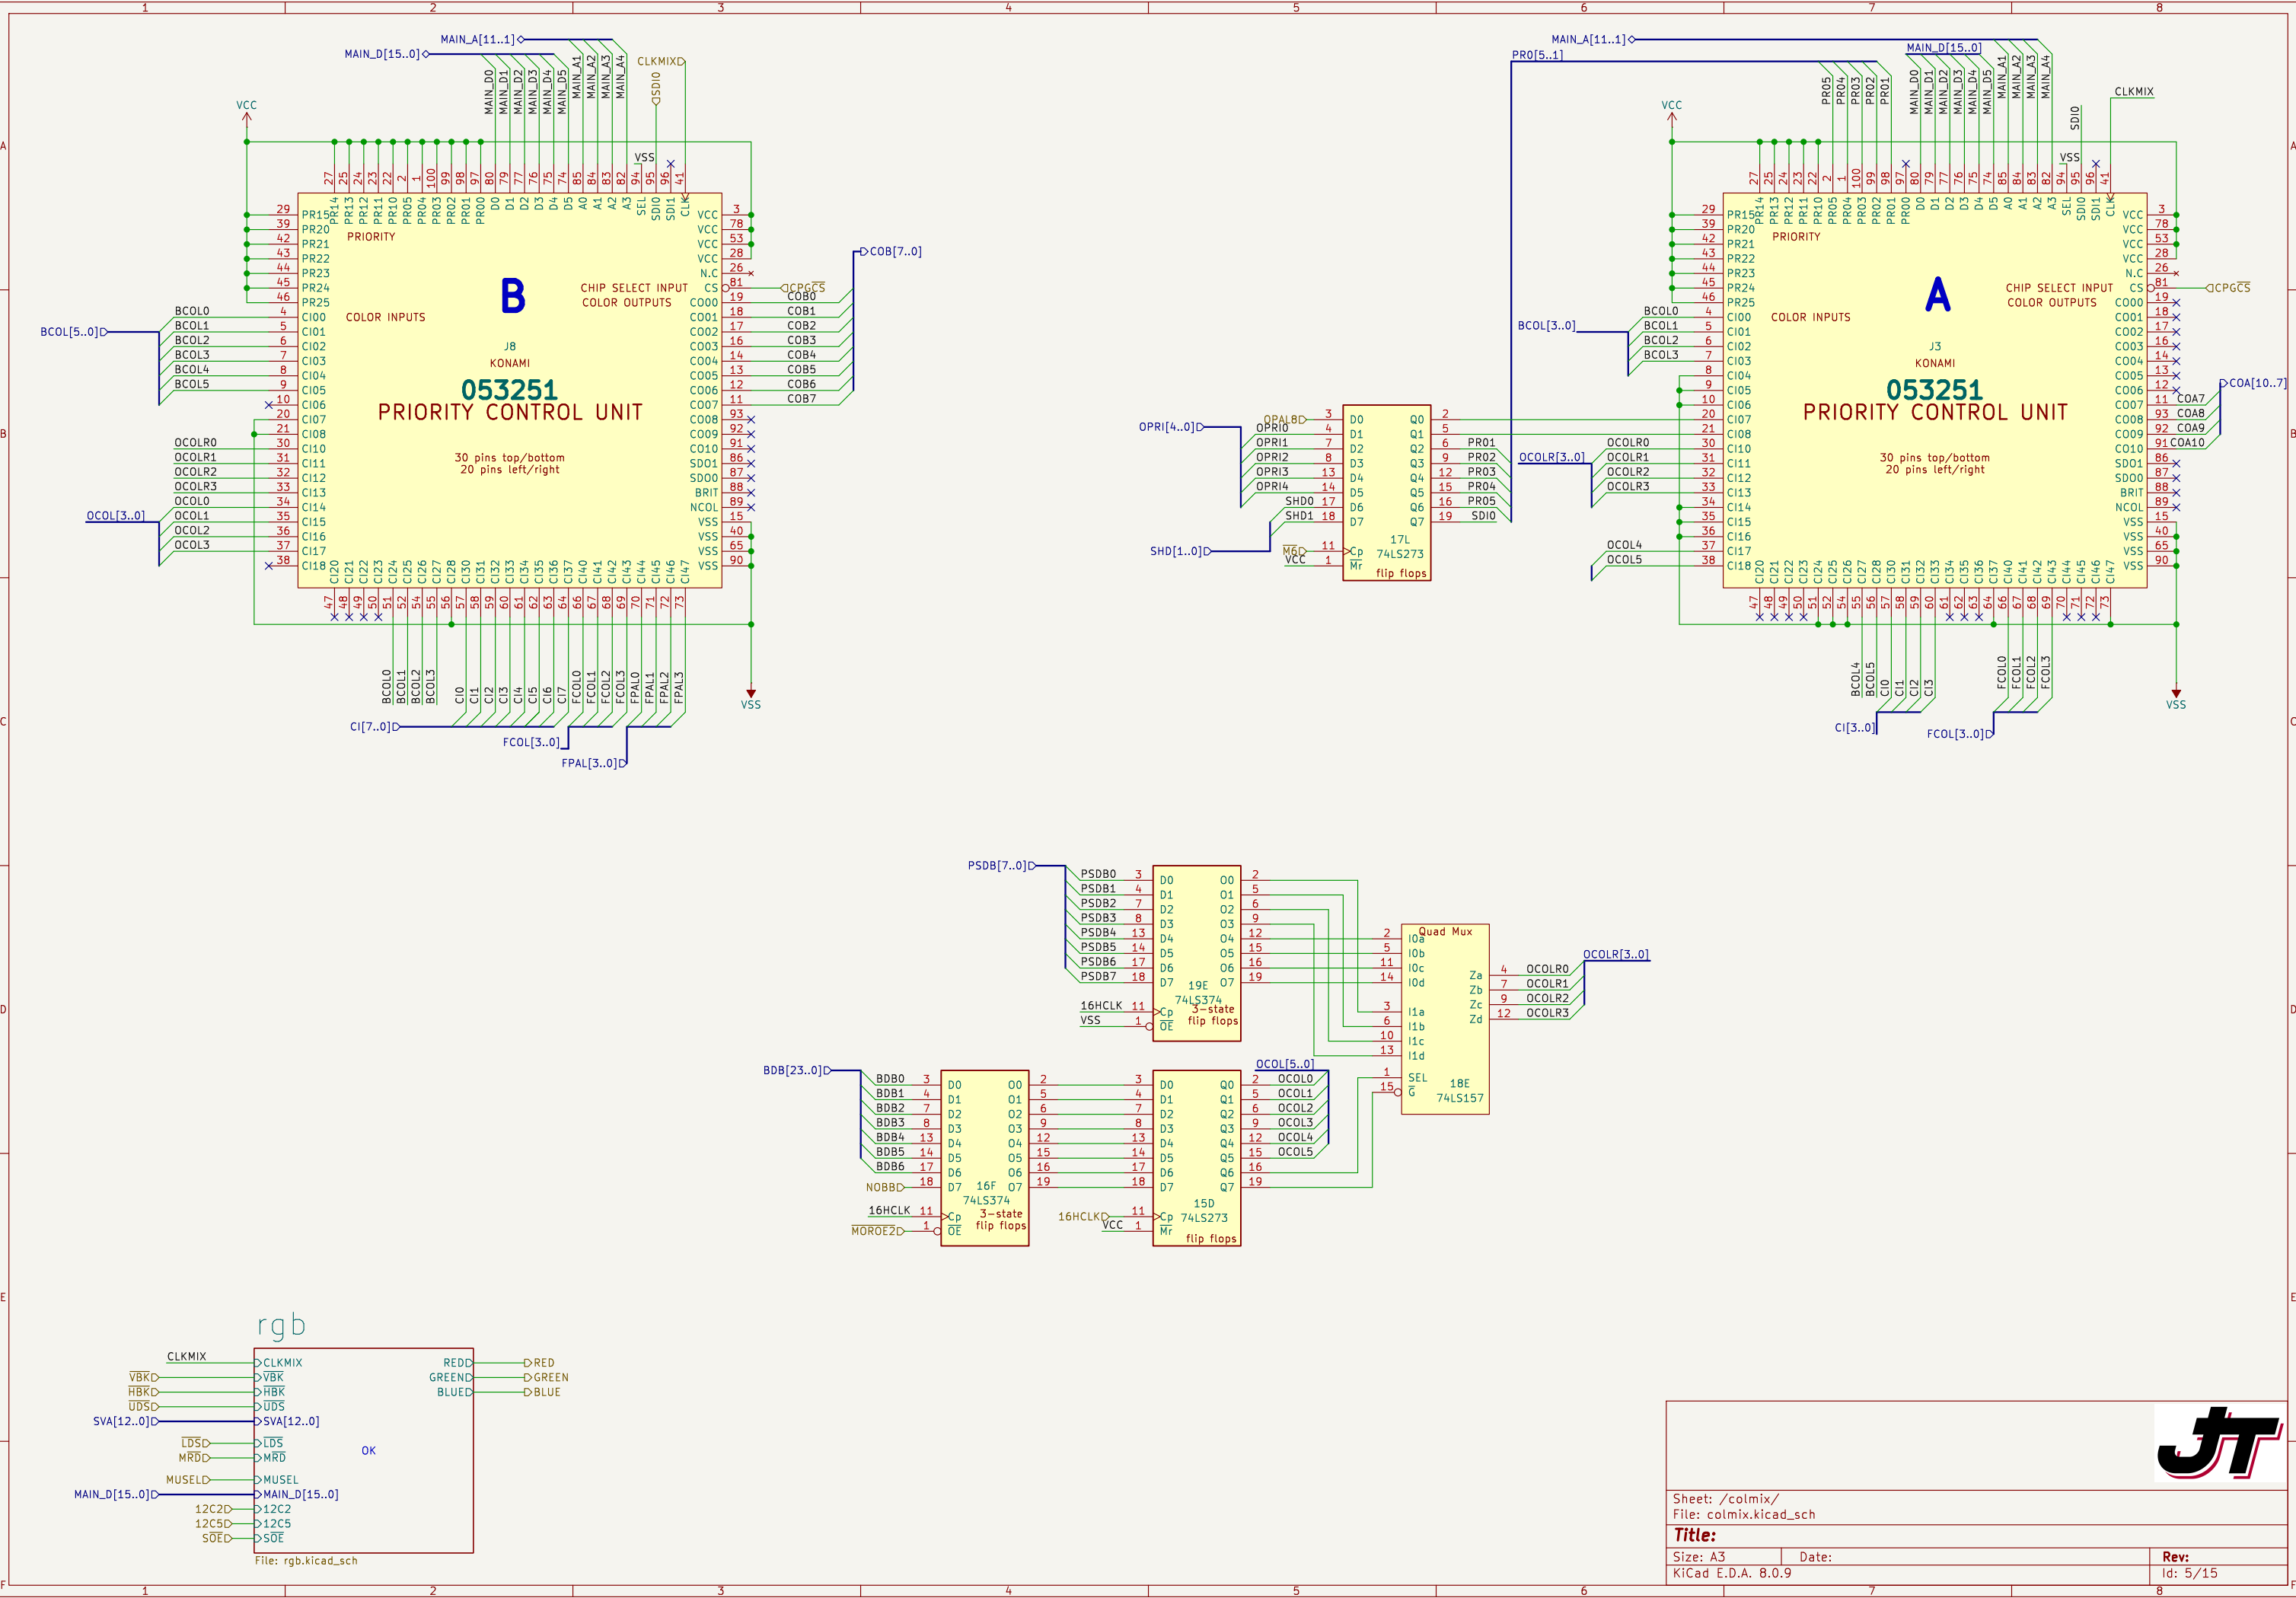


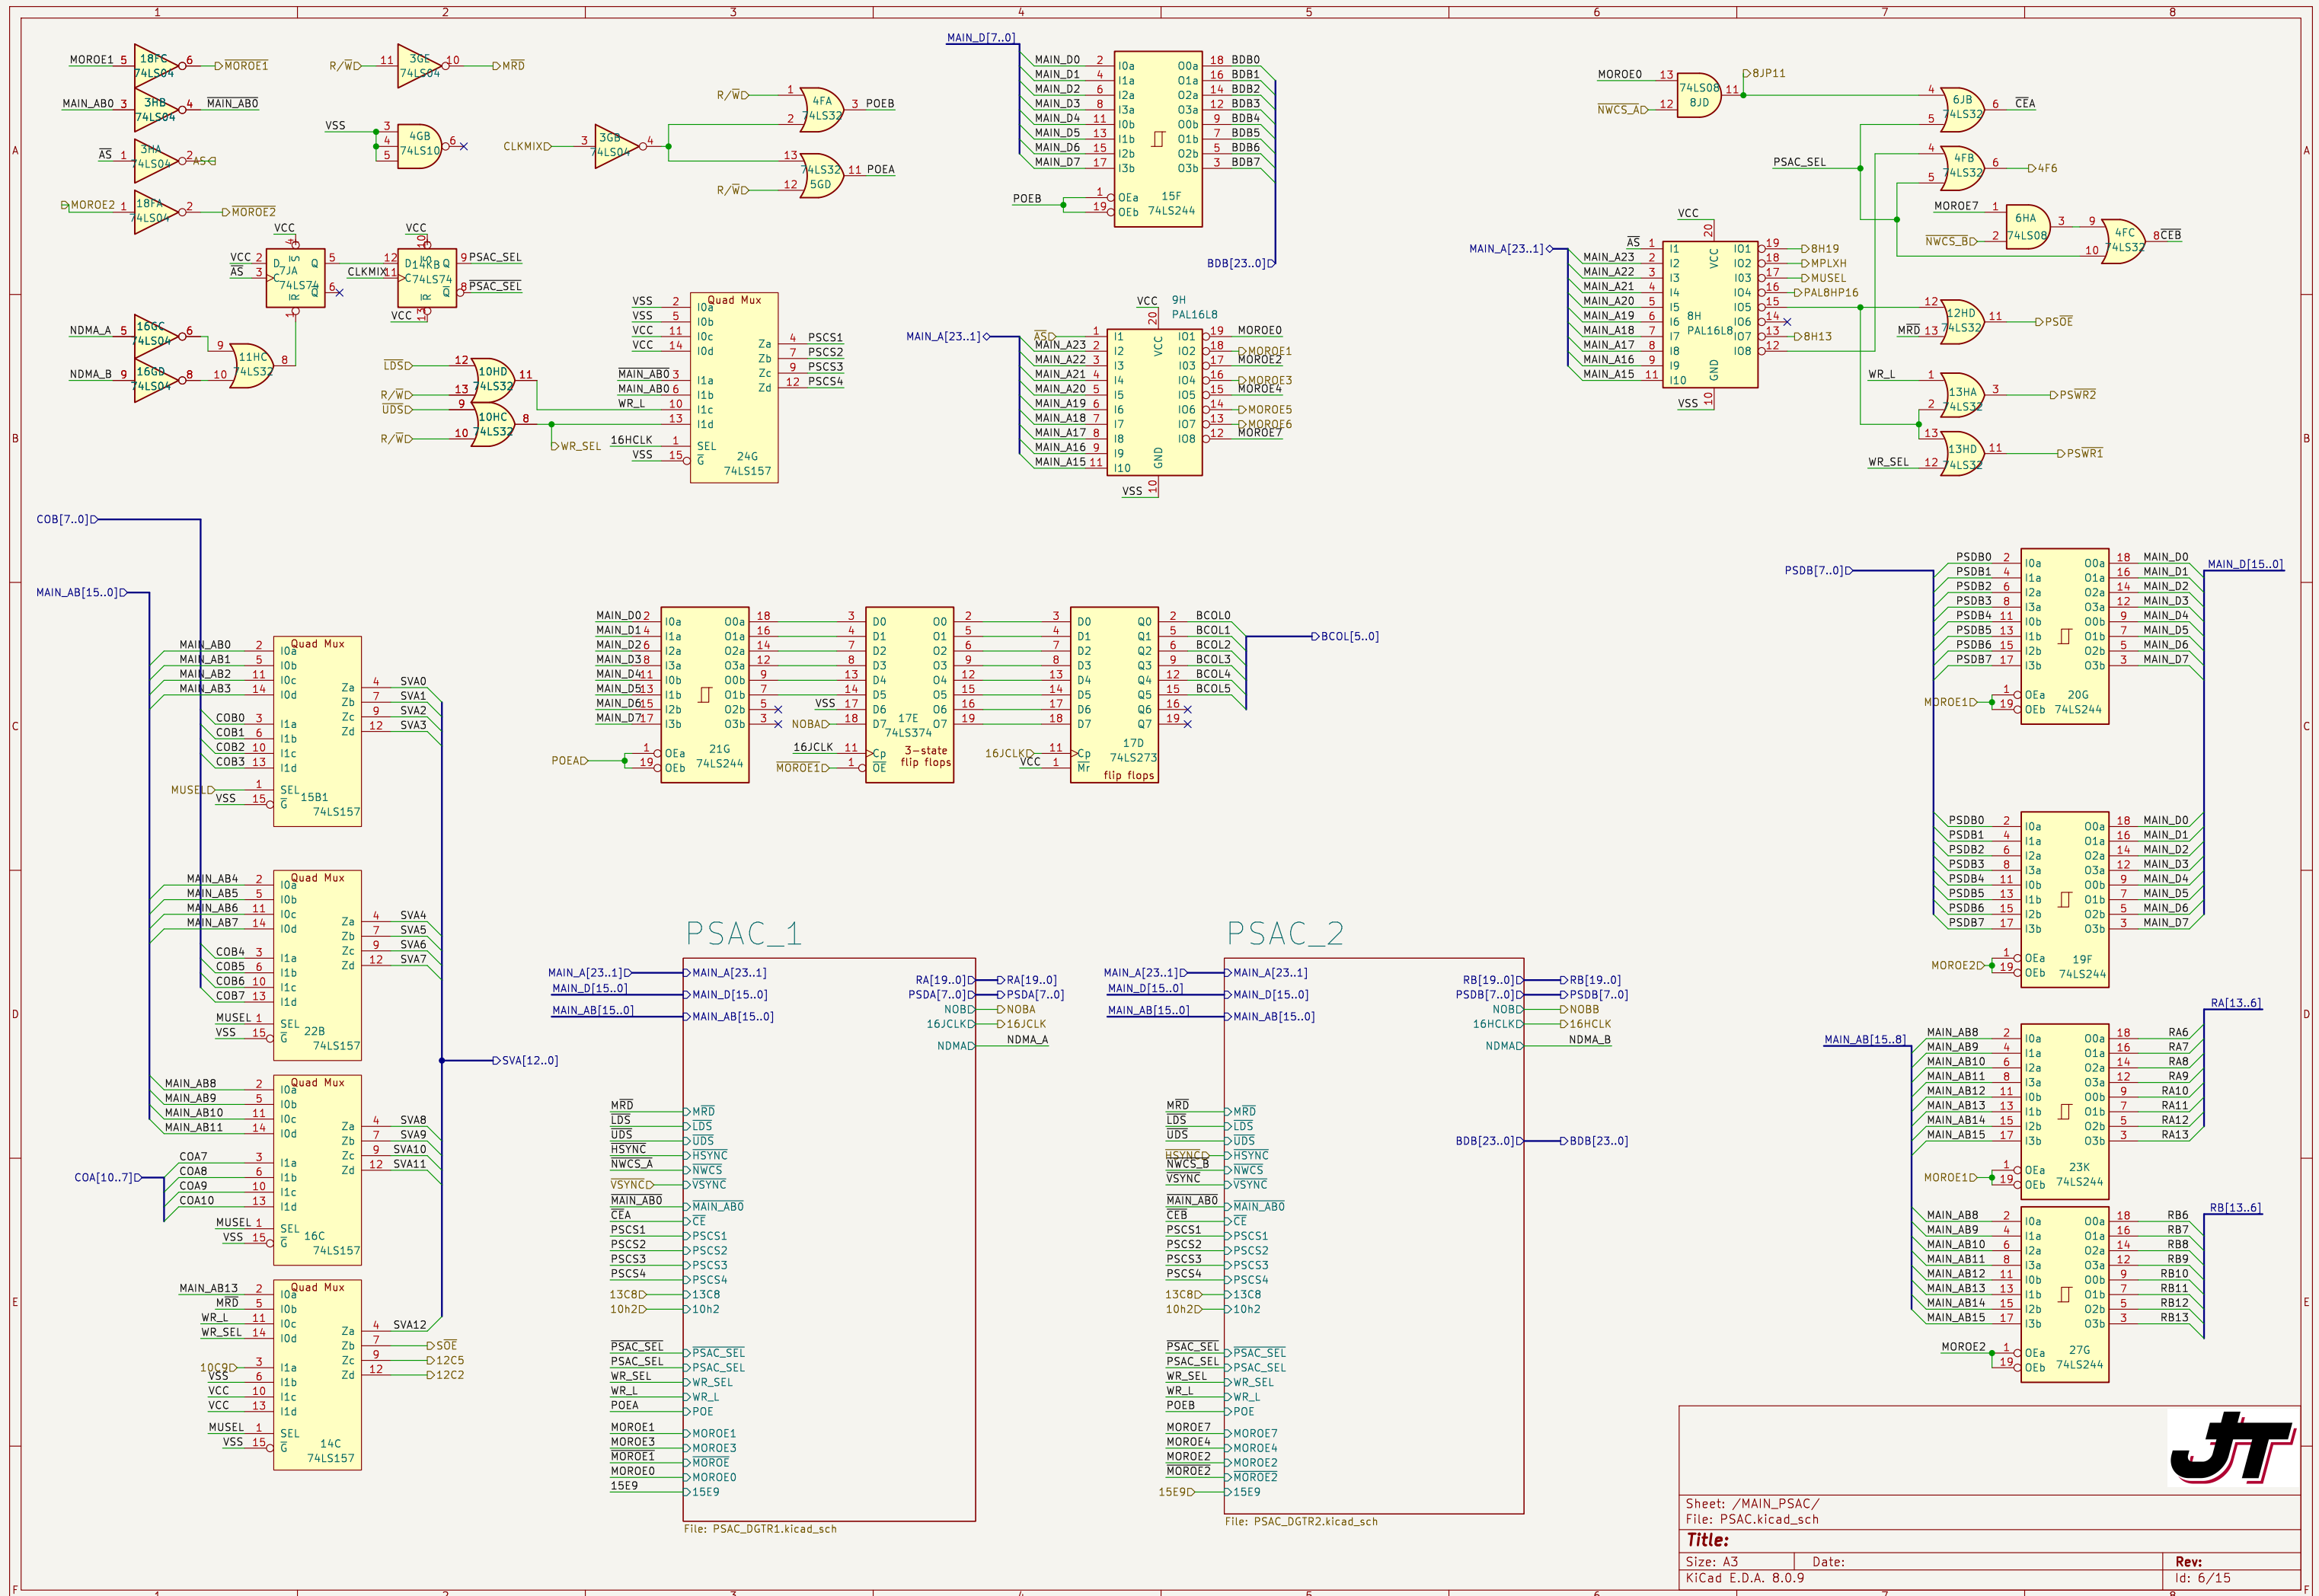






Id: 7/15

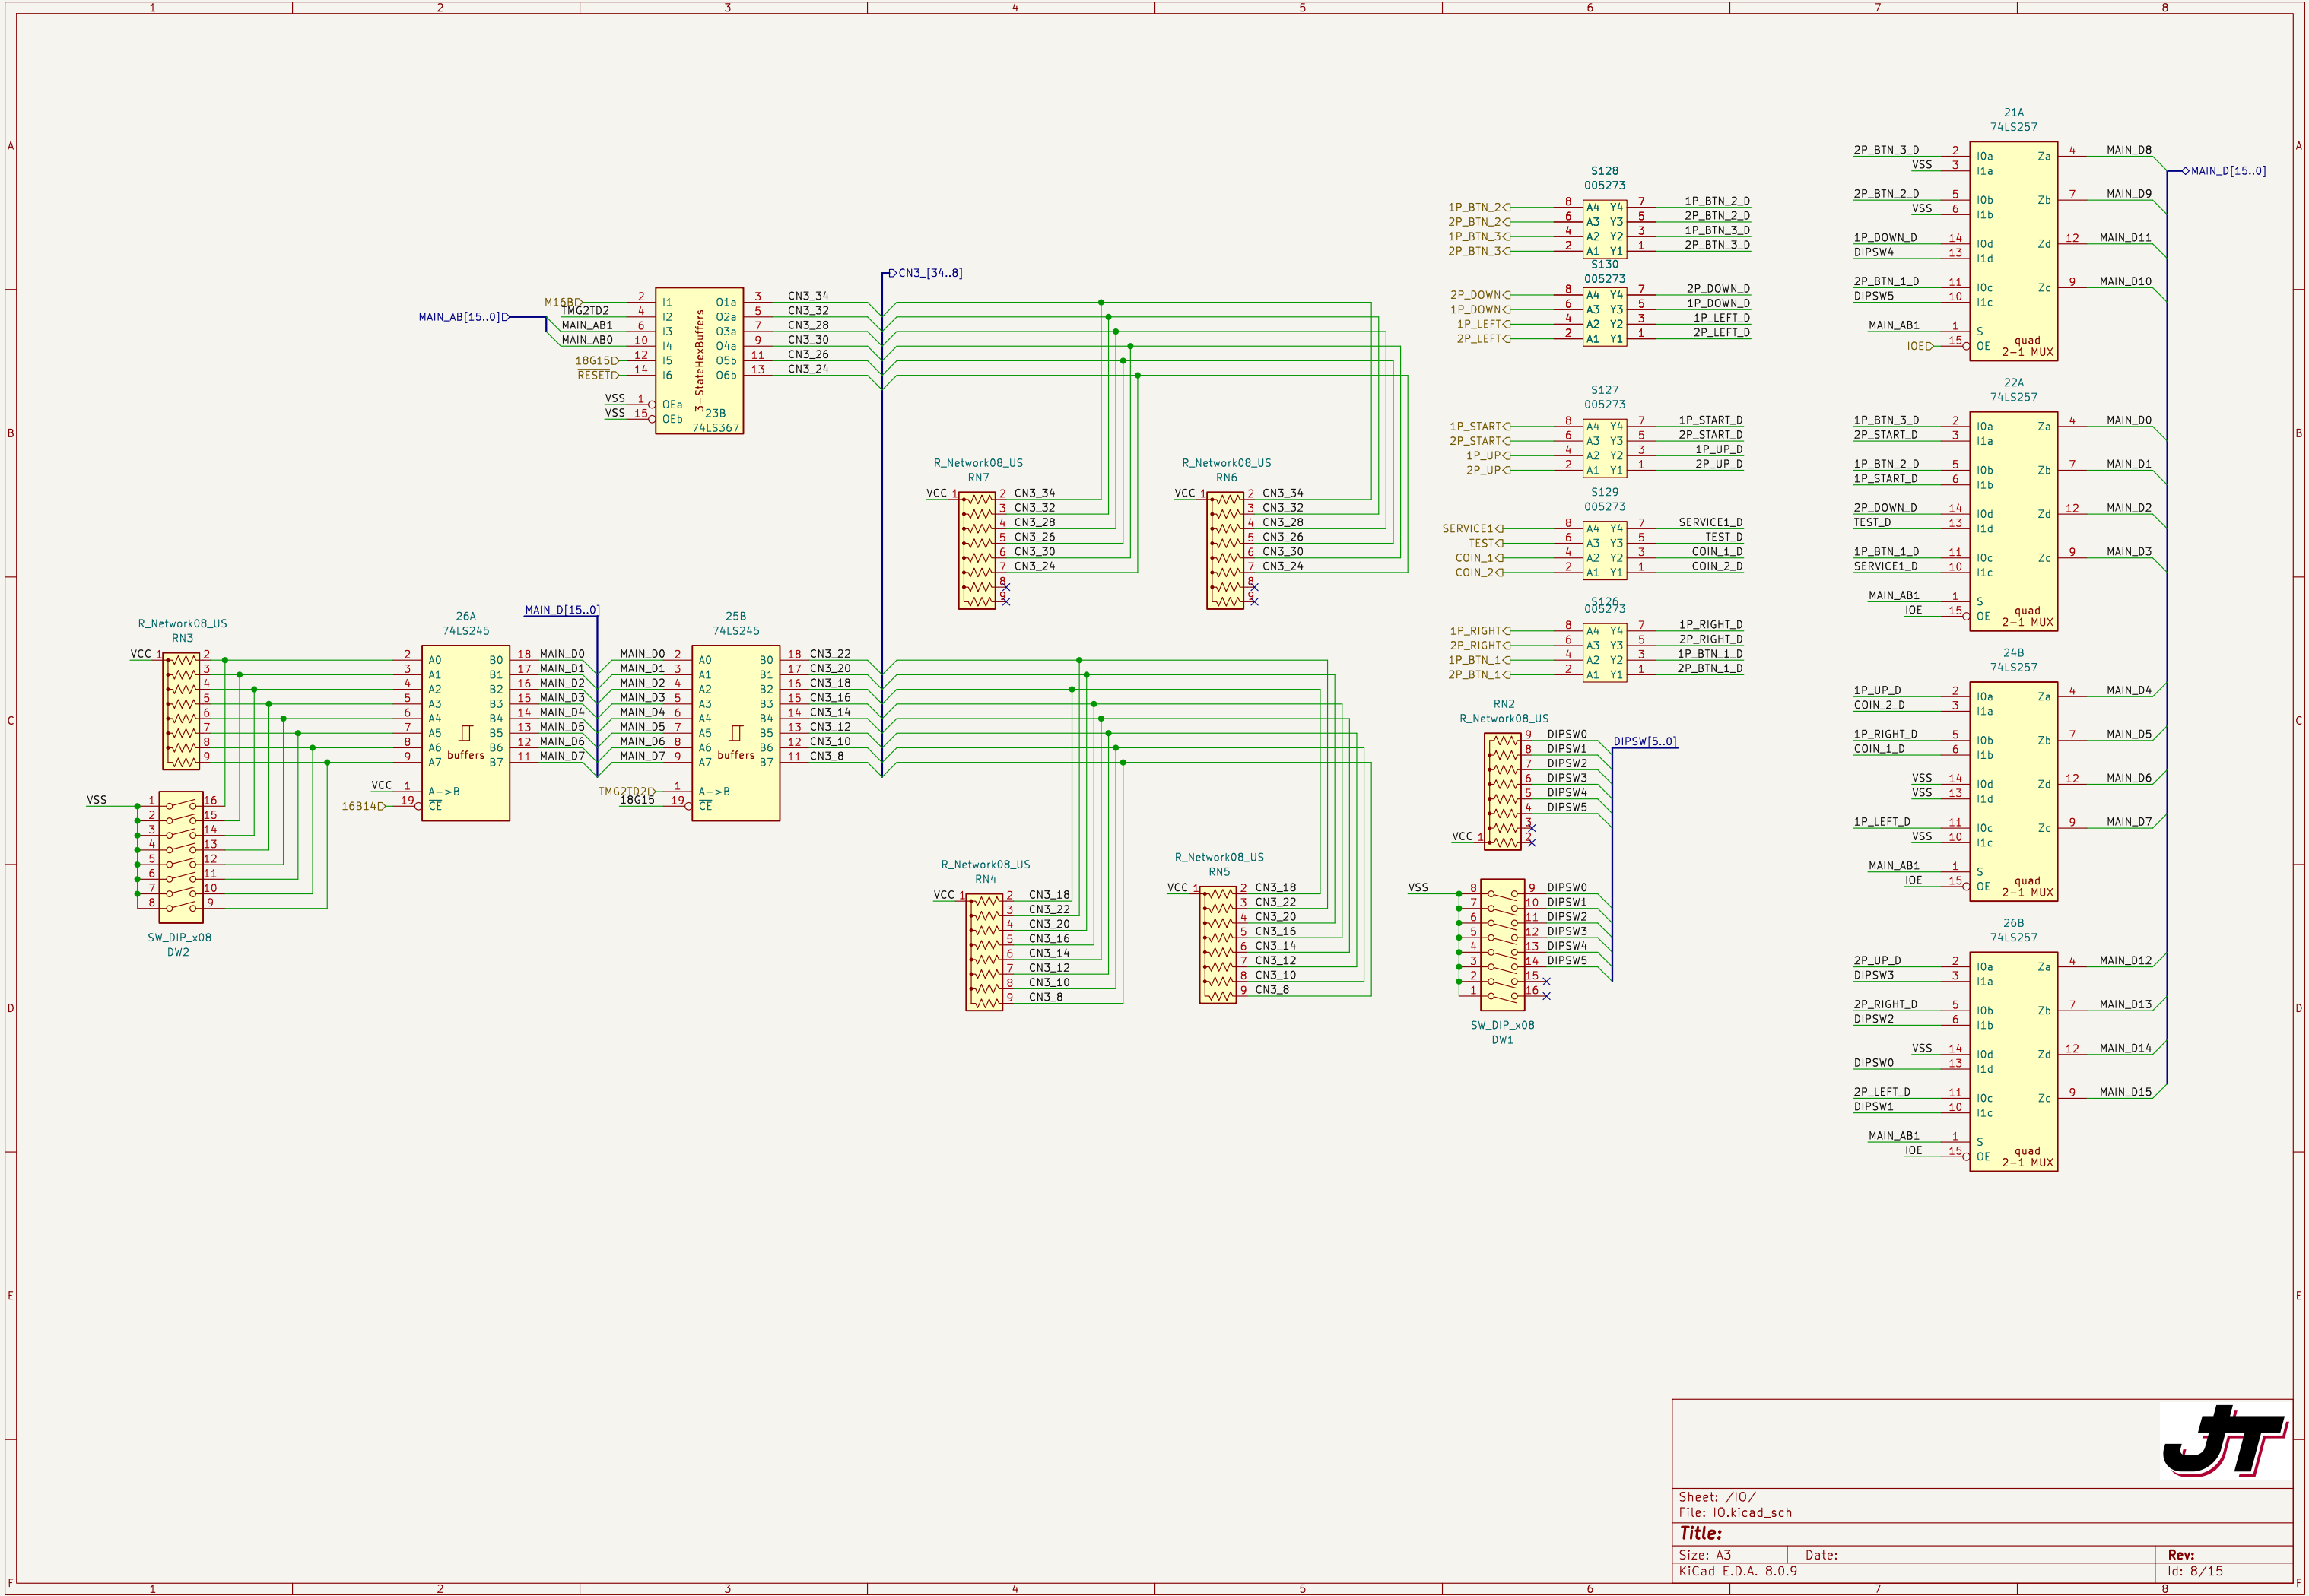

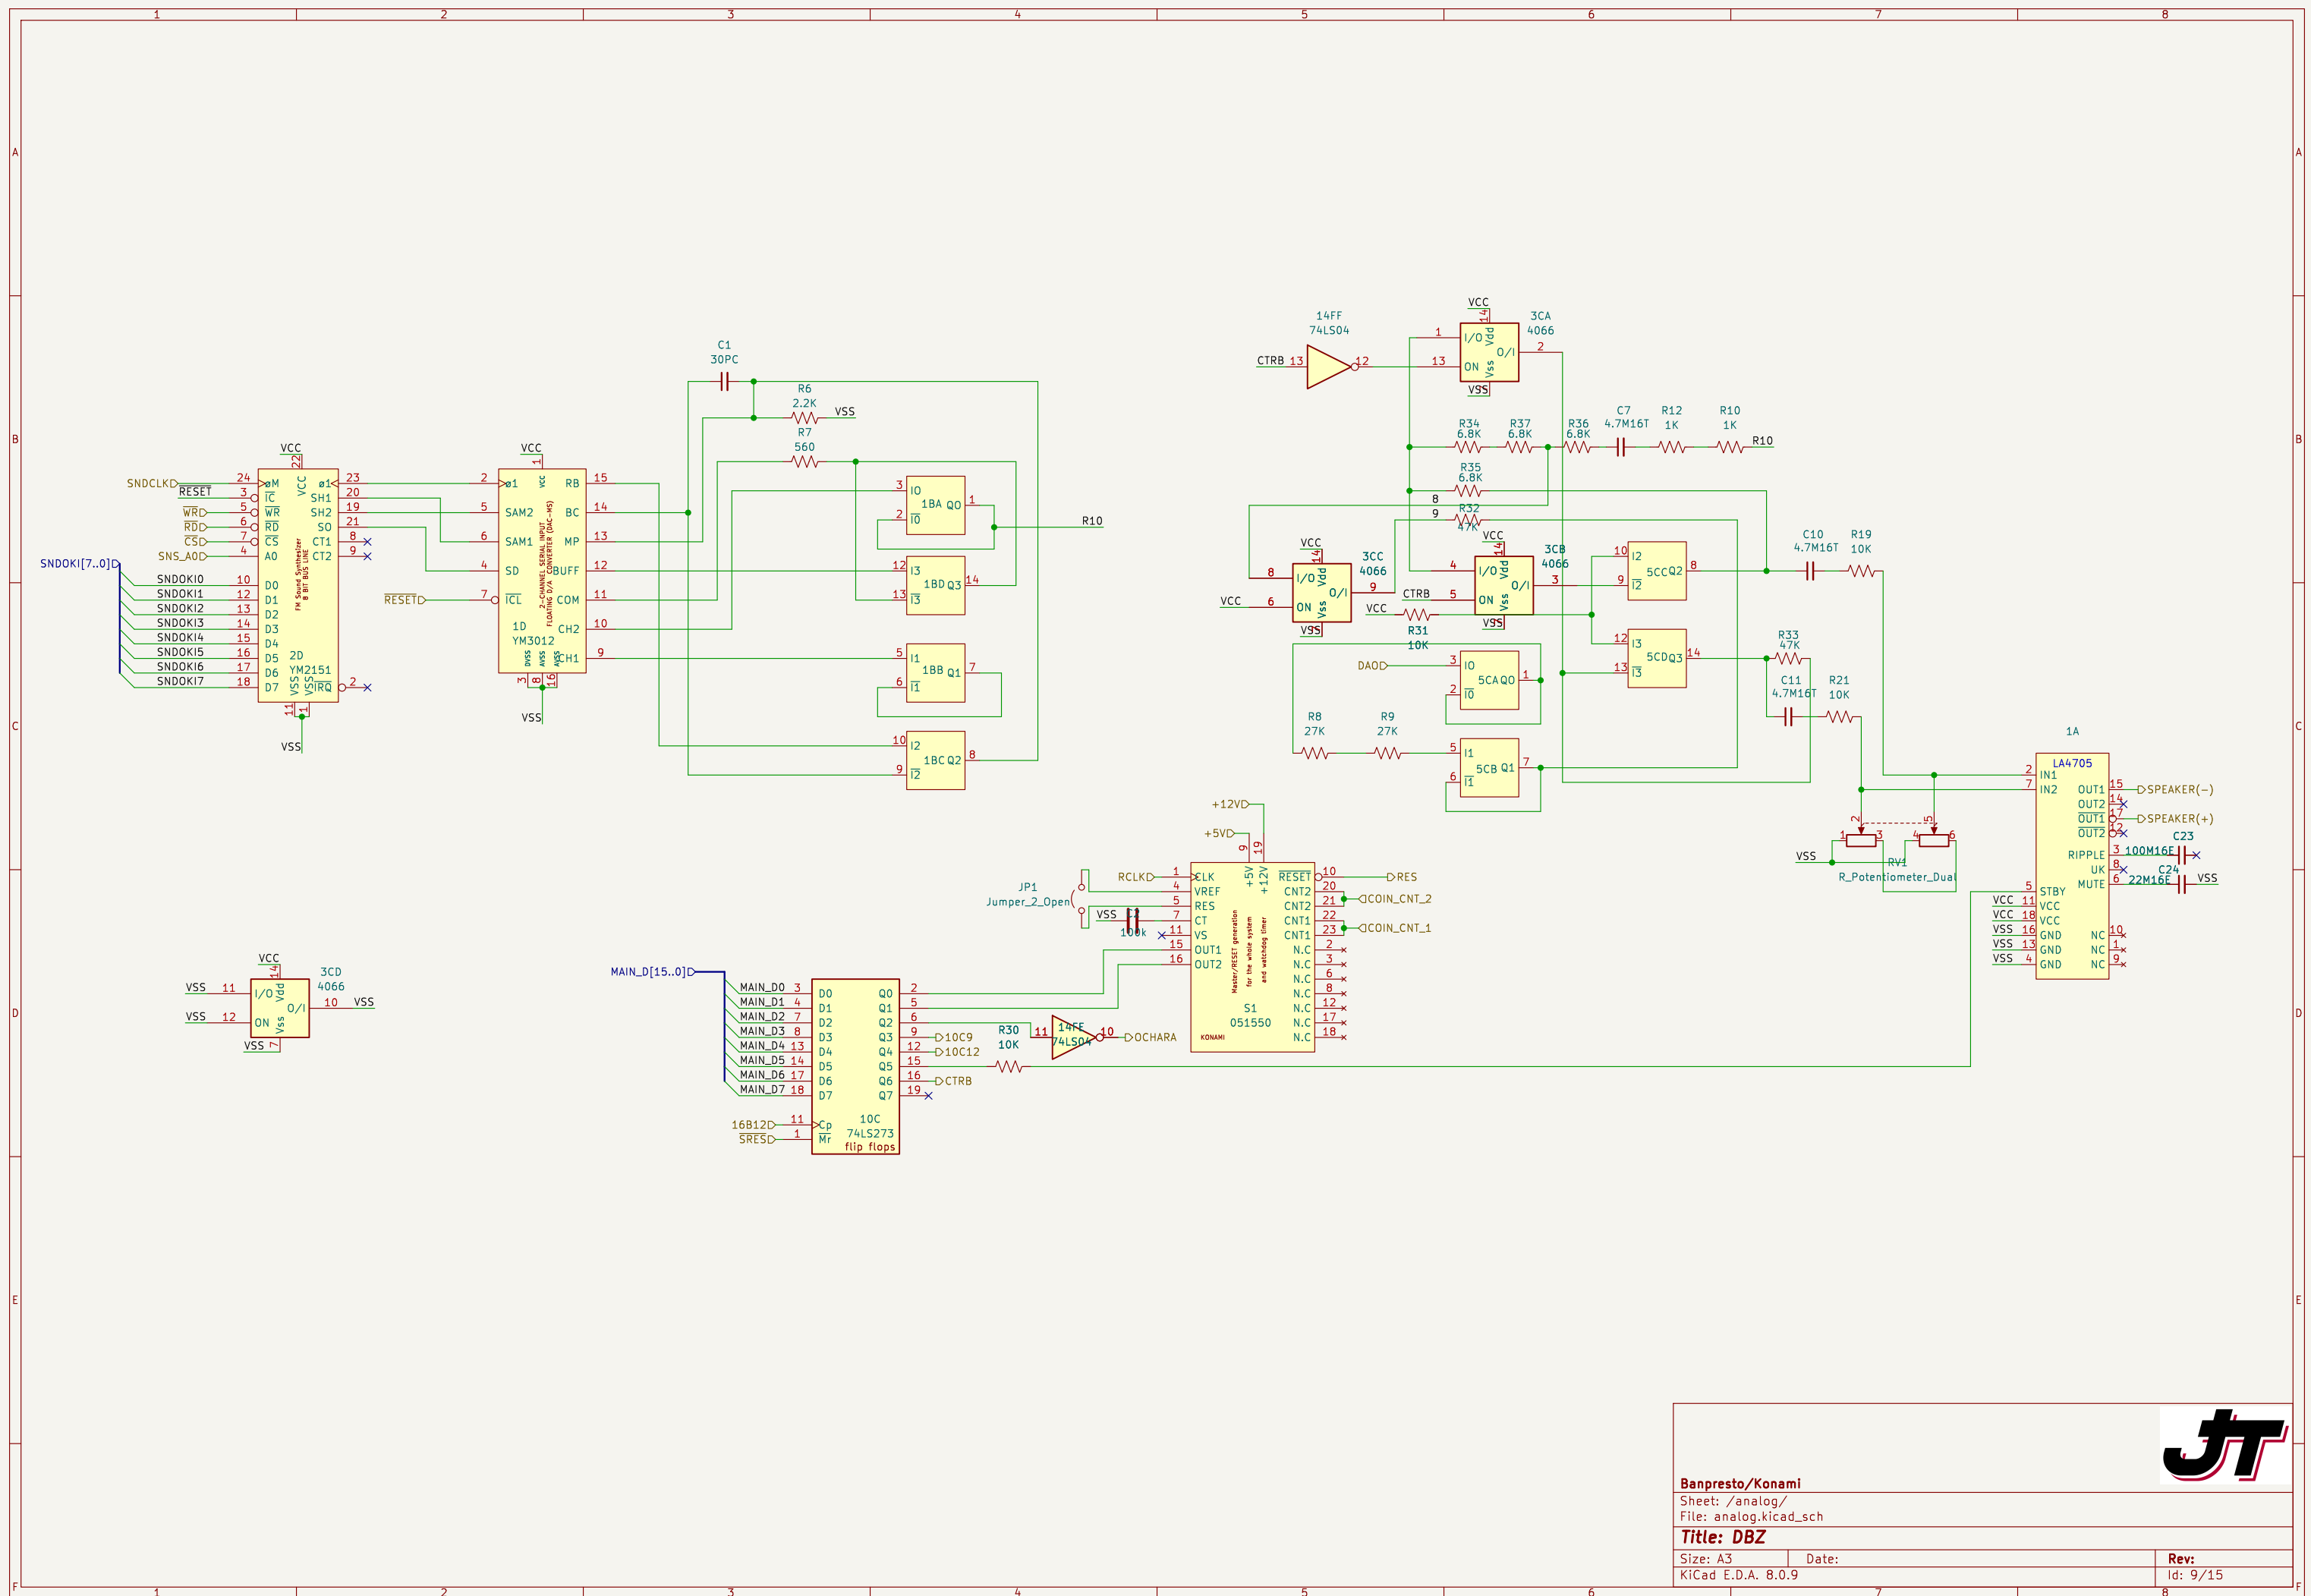


The timing diagram shows four digital signals over time:


- PSDB[7..0]D**: A signal that transitions from low to high at approximately 10 ns.
- RA[19..0]D**: A signal that transitions from low to high at approximately 10 ns.
- PSDA[7..0]D**: A signal that transitions from low to high at approximately 10 ns.
- MAIN.AF[31:1]D**: A signal that transitions from low to high at approximately 10 ns.



								Size: A3	Date:	Rev:
								KiCad E.D.A. 8.0.9	Id: 10/15	
F	1	2	3	4	5	6	7	8	F	

Size: A3	Date:	Rev:
KiCad E.D.A. 8.0.9		Id: 10/15

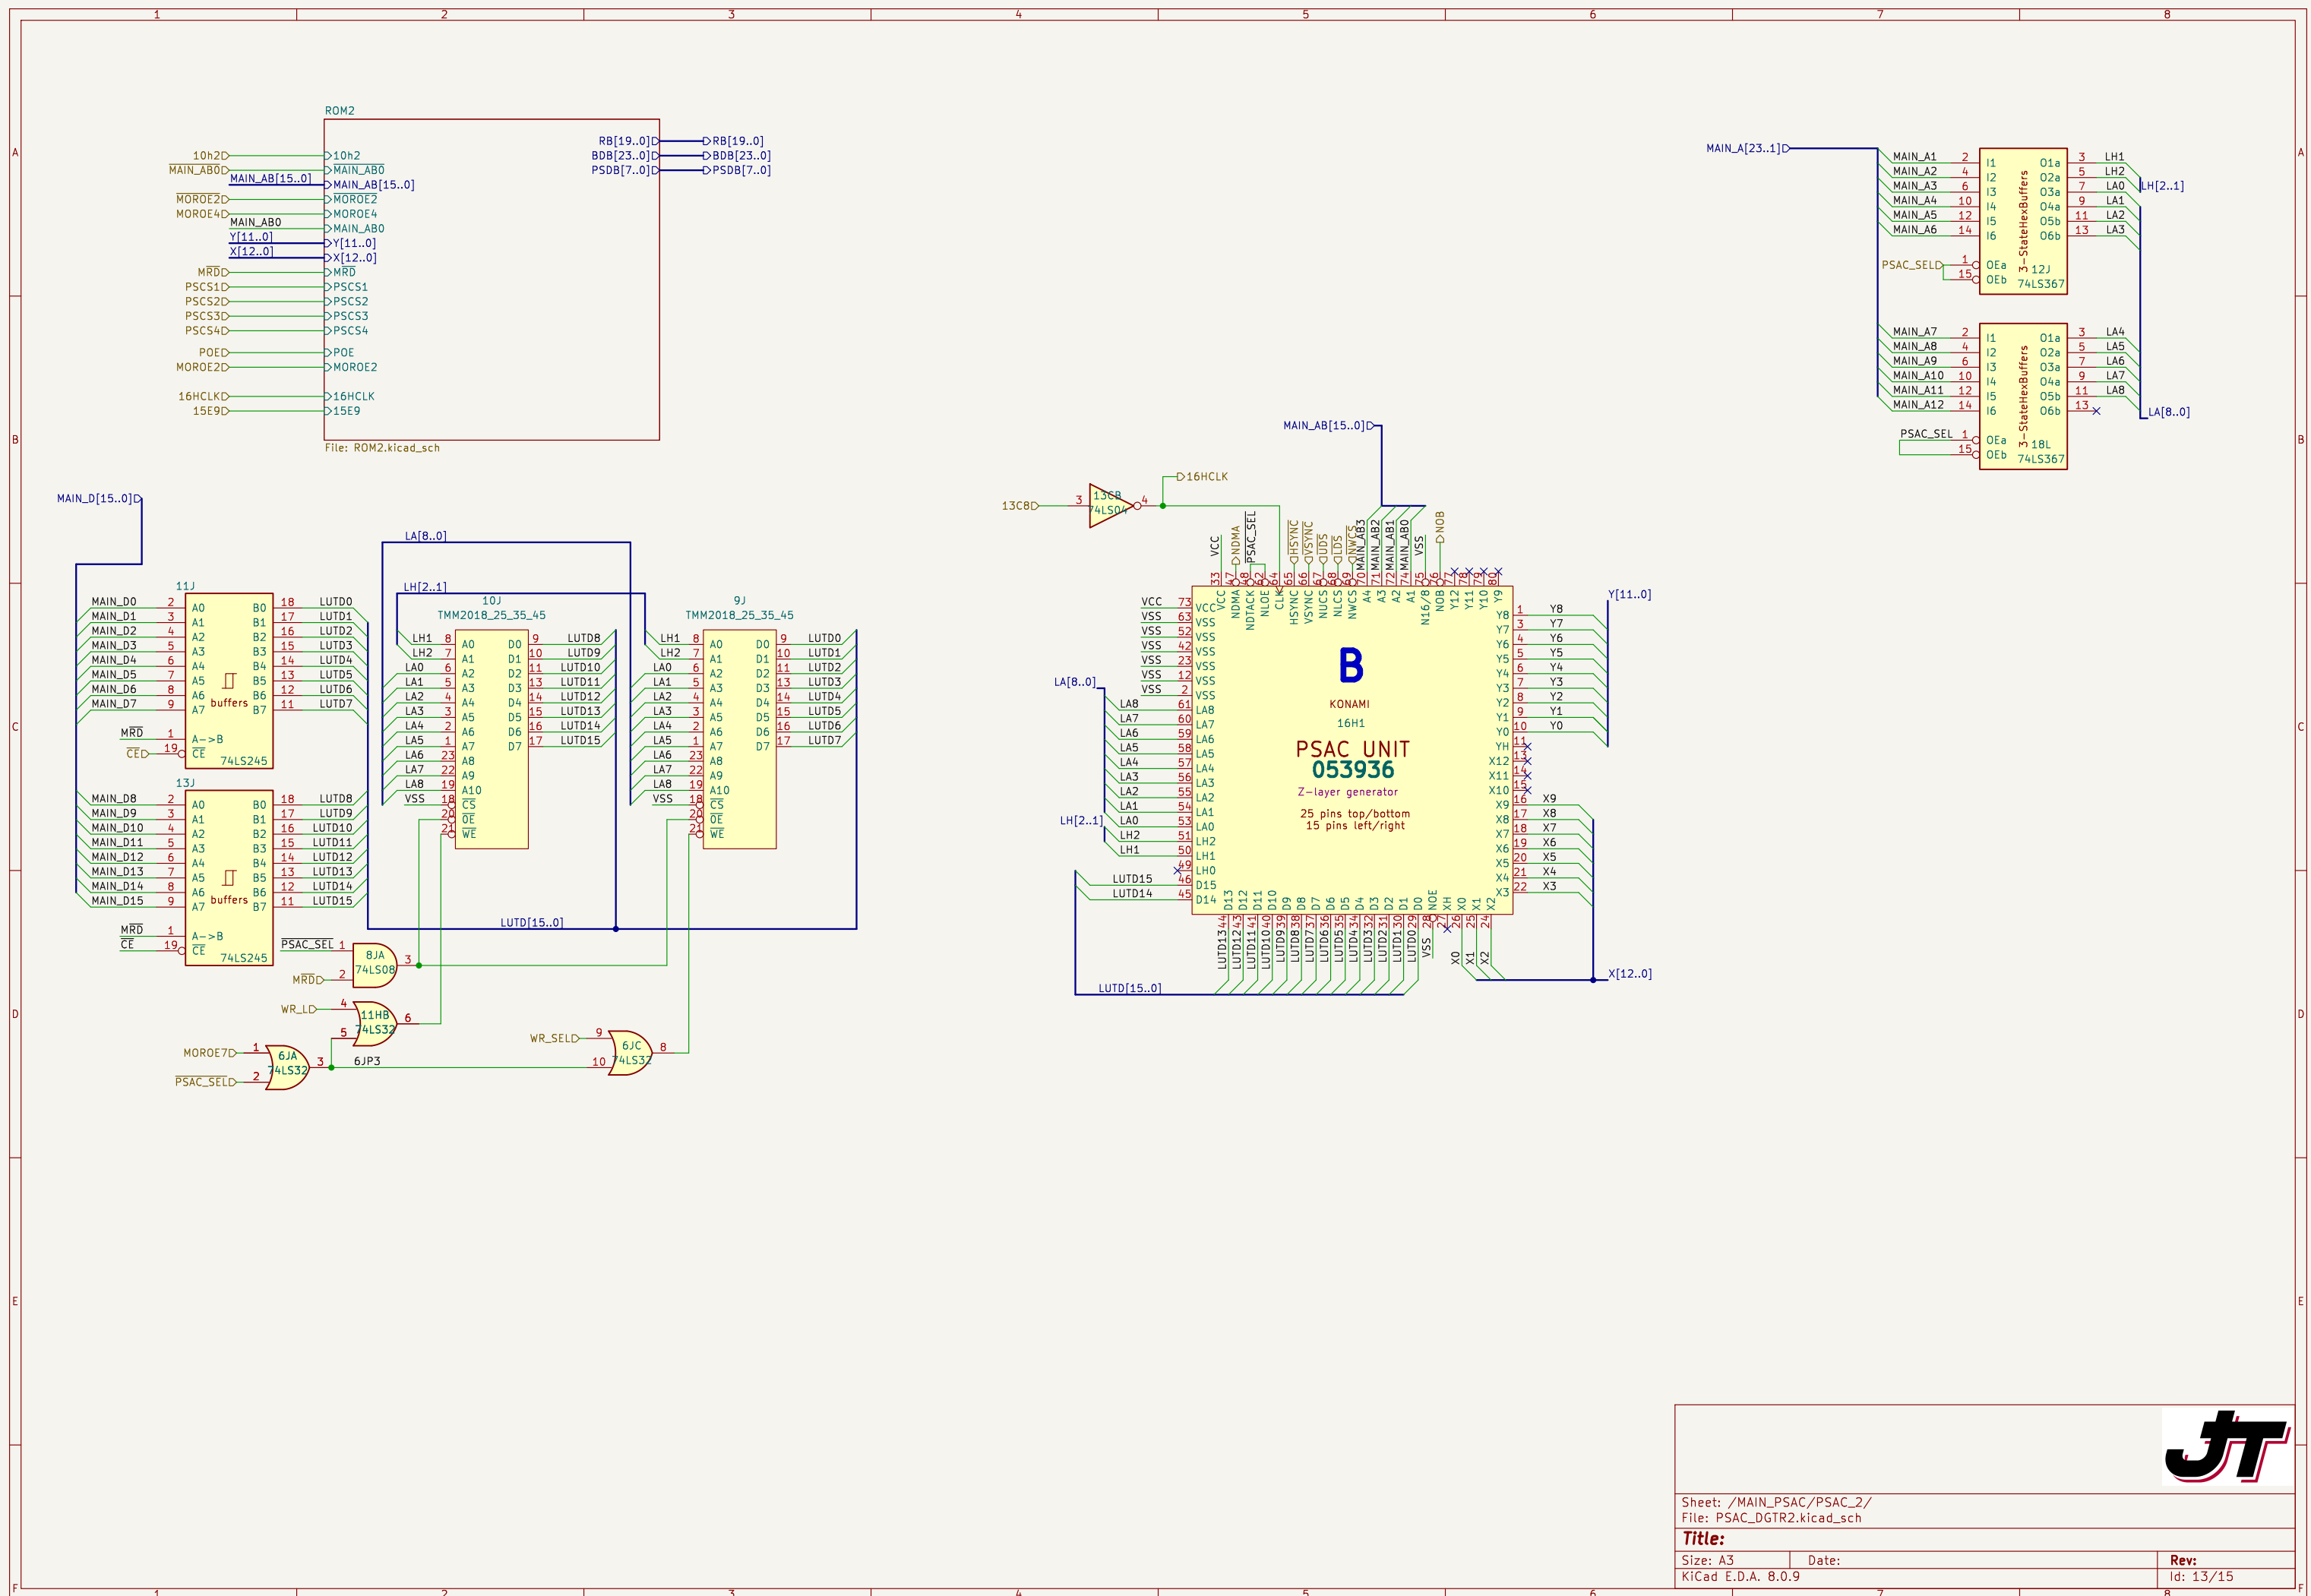

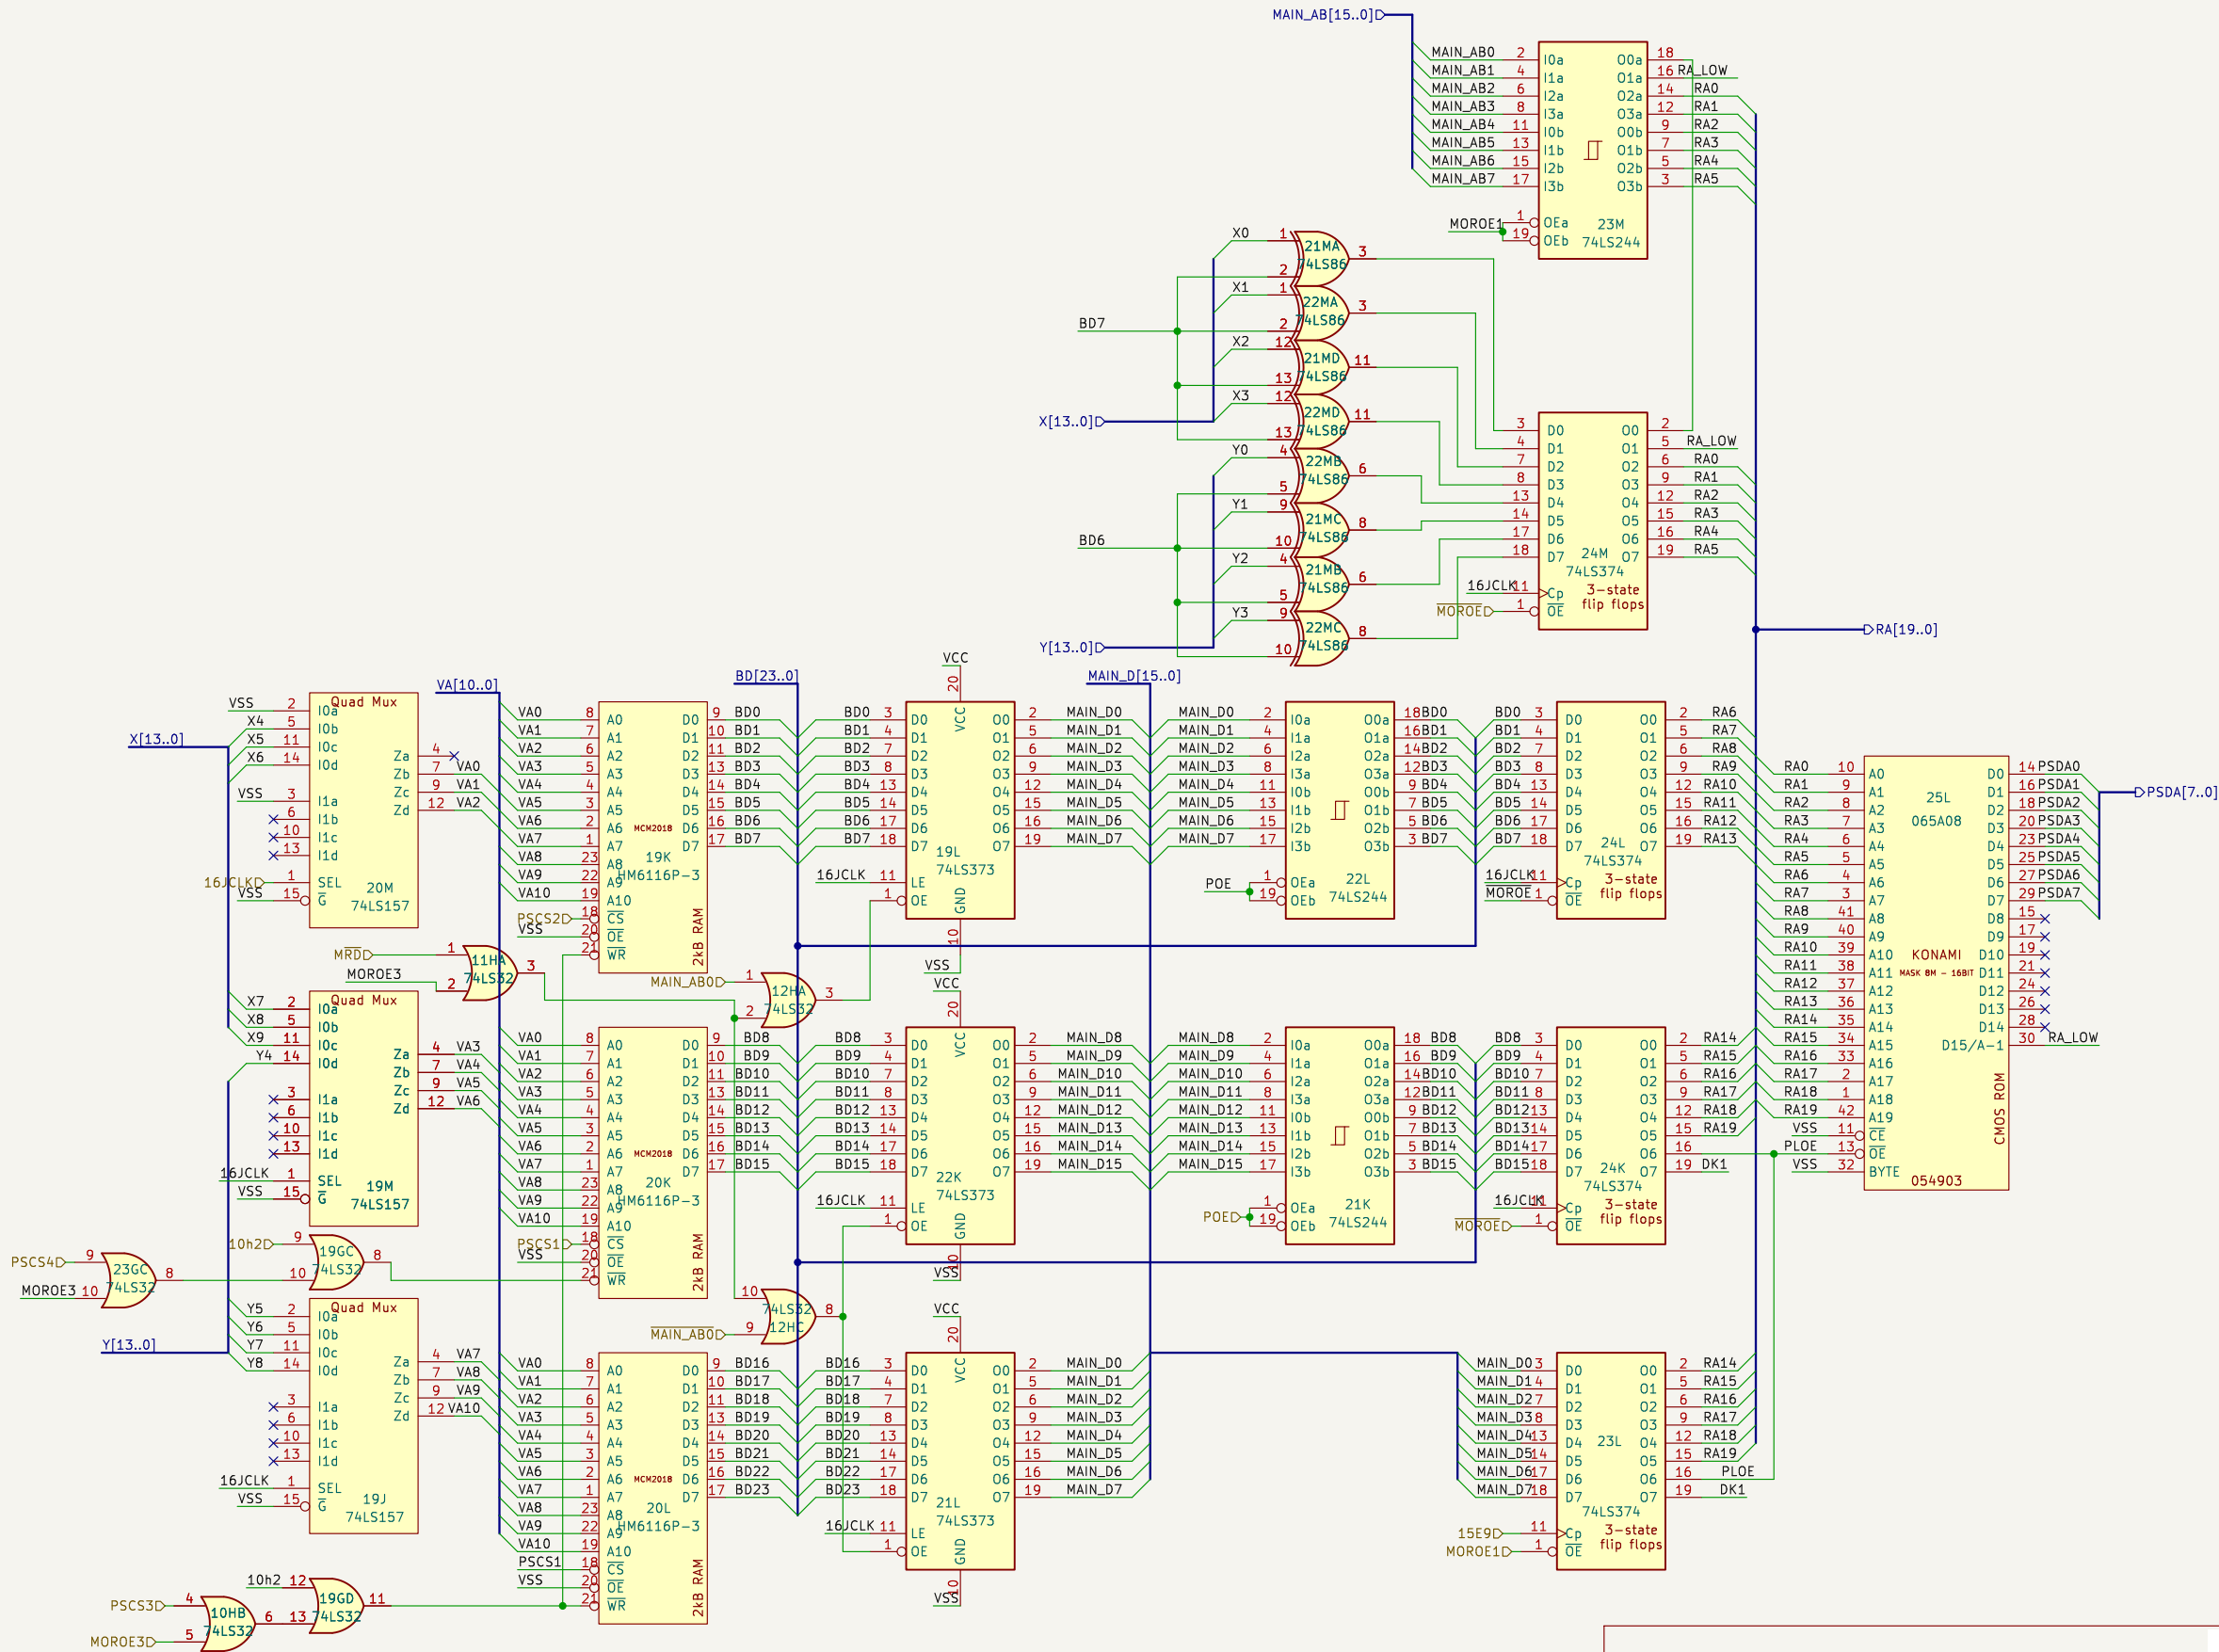

Sheet: /MAIN_PSAC/PSAC_1/ROM1/
File: ROM1.kicad_sch

Title:

Size: A3	Date:	Rev:
KiCad E.D.A. 8.0.9		Id: 14/15

