


USB-C Power Input and LDO Regulators

2 different LDO's for noise and separation performance

5V enters through a USB-C connector feeding into the 2 3V3 LDO regulators one for digital and one for analog signals. I added a 5V TVS diode for ESD protection.

Ferrite bead and Capacitor for LC filter that blocks high frequency on shared 5V rail from reaching analog LDO.

A note to remember is adding a bulk capacitor when connecting to the FPGA from VBUS

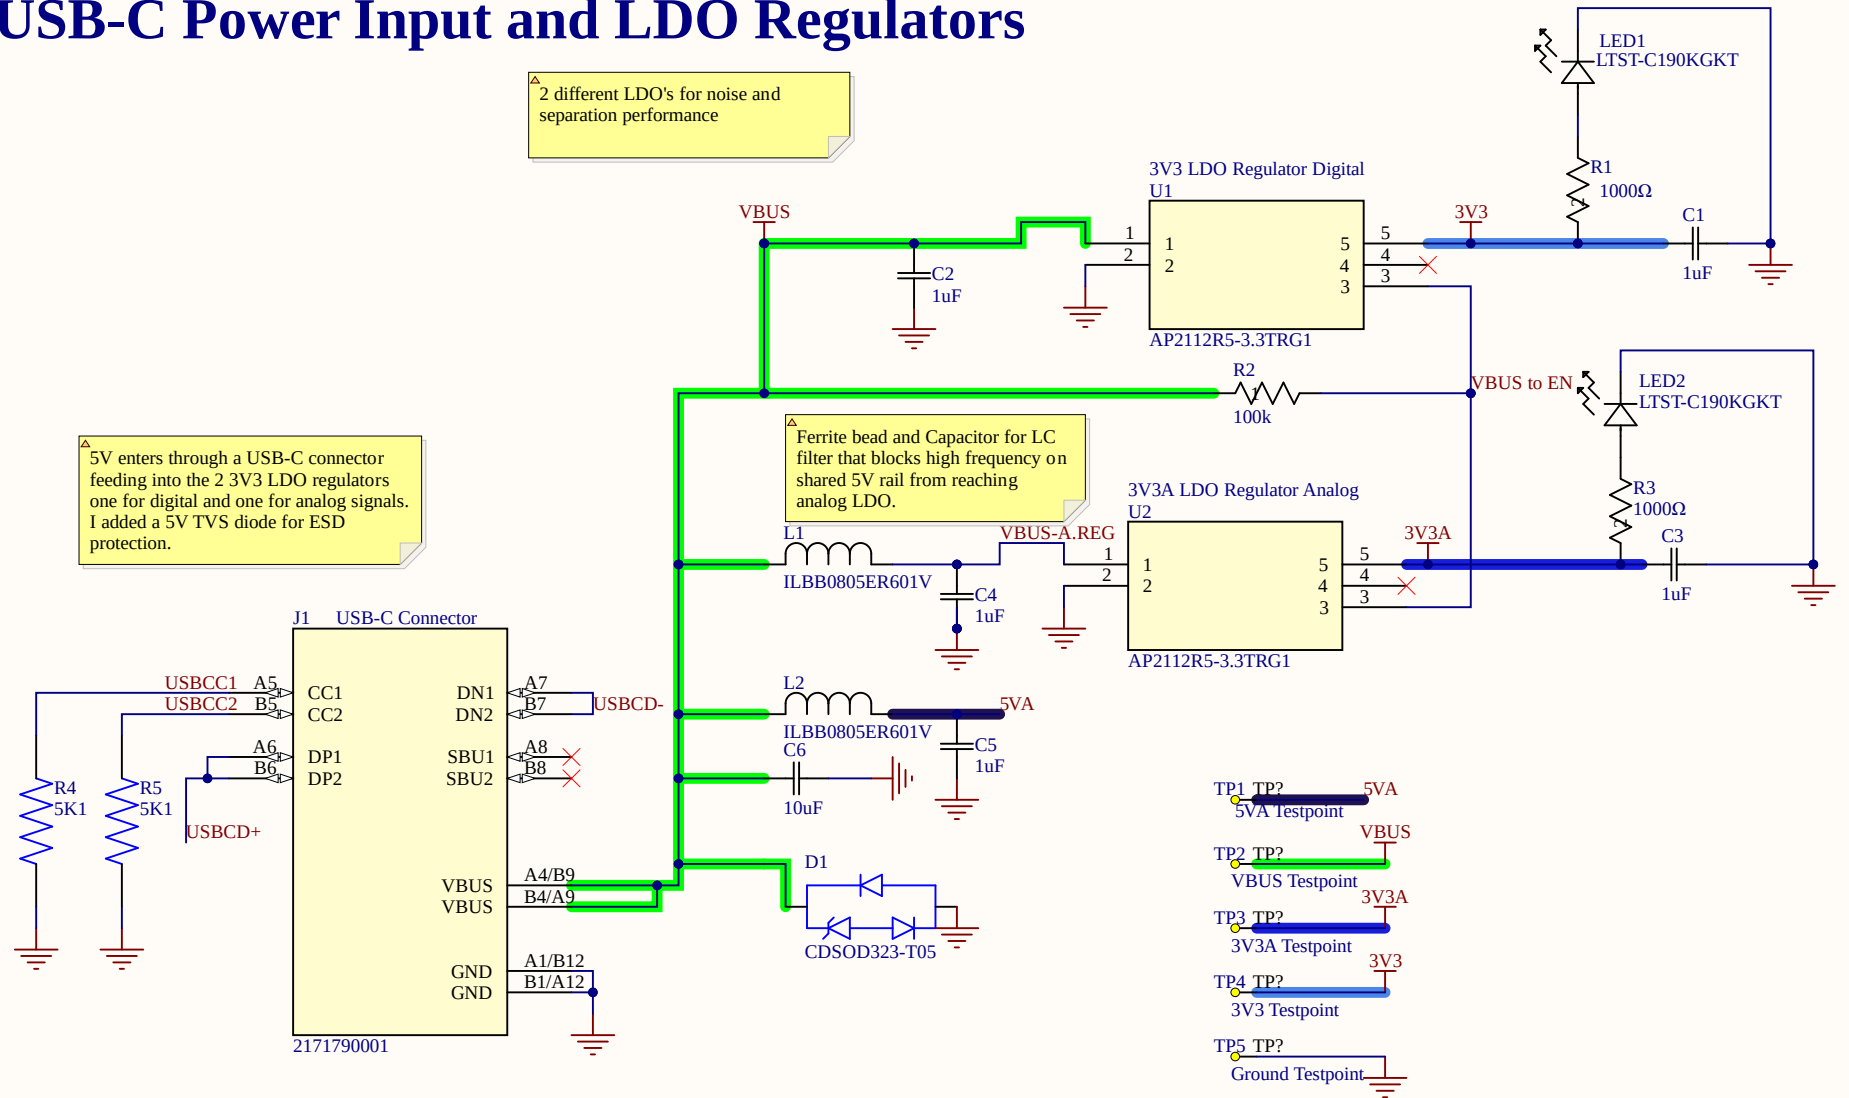

Title		
Size	Number	Revision
A		
Date:	6/16/2026	Sheet of
File:	C:\Users\...\Power.SchDoc	Drawn By: