

Cylinder 70/85

Norlux -the nordic lighting supplier




Cylinder uses the possibilities created by new technology. The LED driver is mounted inside the luminaire body. This gives us a slim design combined with a powerful lightoutput that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis. To create further opportunities to "play" with light you can mount a diffuser on the luminaire, this can be ordered separately.

LED Spotlights
COB LED



L80
Guaranteed performance,
minimum 80% of initial light
quality and - quantity after
60.000 hours in use.

B50
Maximum 50% is allowed
to fail in fulfilling this
level of performance.

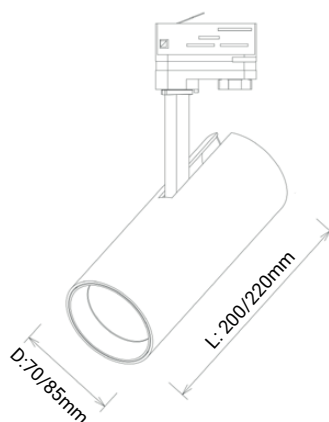

Life expectancy L80/B50: >60 000 hours

Dimensions

Adjustments

Cylinder	Kelvin:	Lumen:	Product code:	Power:	Beam Angles:	Color:
Cylinder 70mm CRI>90	3000K	2350lm	17055-	20W	15° 24° 38°	x -2 -3
Cylinder 85mm CRI>90	3000K	3200lm	17155-	28W		x -2 -3
Dali Dimming Option		N/A	x			
Push Dimming Option		N/A	x			
1-10V Dimming Option		N/A	x			
Phasecut Dimming Option		N/A	x			

Norlux product no.: Product code - Beam Angles - Color code.
Eks: Cylinder 70mm 3000K 24° White = (17055-24-3)

