




# Frame double

Norlux -the nordic lighting supplier



Have you considered down lights that are not round shaped? Our Frame is a range of downlights that are available in both a single and a double version. The Frame can be tilted to 25 degrees and this makes it very suitable for creating an exiting atmosphere in a room. The Frame double is equipped with two EPCOM18i3 plugs and is available with a wide range of connection options.

LED Downlights  
COB LED

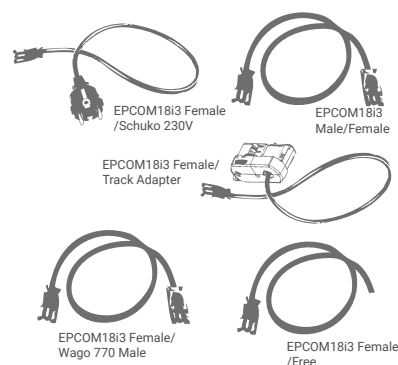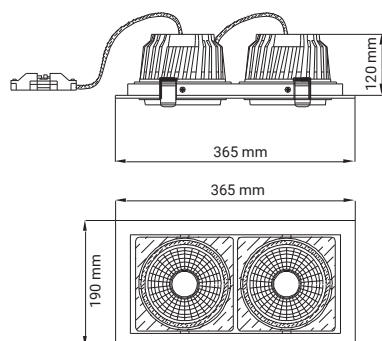

Connection options on request

Dimensions

Adjustments/ Cut Size

Life expectancy: 50 000 hours

Product no.	Product name	System (W)	Lumen	Color temp.	CRI	Reflector	Color
14122-5-20-1	Frame double	2x29W	2x3817 lm	3000K	80	20°	Grey
14122-5-20-2	Frame double	2x29W	2x3817 lm	3000K	80	20°	Black
14122-5-20-3	Frame double	2x29W	2x3817 lm	3000K	80	20°	White
14122-5-30-1	Frame double	2x29W	2x3817 lm	3000K	80	30°	Grey
14122-5-30-2	Frame double	2x29W	2x3817 lm	3000K	80	30°	Black
14122-5-30-3	Frame double	2x29W	2x3817 lm	3000K	80	30°	White

831-040-20 Reinforcement base 595x40 mm

Alu



[norlux.no](http://norlux.no)

**\*Dimming alternatives:**  
1-10V dim (Product.no.)-d  
Phase dim (Product.no.)-dd  
Dali dim (Product.no.)-ddd



Norlux- part of LightGroupNordic