




L70
Guaranteed performance,
minimum 70% of initial light
quality and - quantity after
50.000 hours in use.

B10

Maximum 10% is allowed to fail in fulfilling
this level of performance.

Alhama is a sealed industrial light fixture for ceiling surface mounting, indoor and outdoor. The Alhama is classified in accordance with IP66. The light fixture is made from robust fiberglass and is equipped with a semi opal PMMA diffusor. The Alhama is prepared for cable 2,5mm² wiring through for an efficient installation. We can also offer Alhama Ex. build for explosive areas, for more specifications contact Norlux. Please also see table below for further details.

LED Ceiling
SMD LED

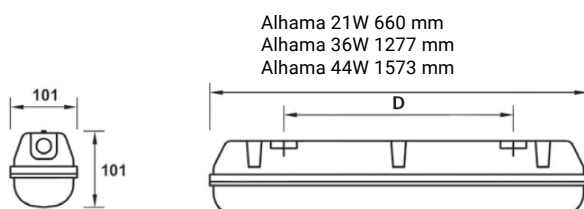

Alhama 21W 660 mm
Alhama 36W 1277 mm
Alhama 44W 1573 mm



2.5mm² Through wiring

Different lengths

Weatherproof IP66 body

Life expectancy (L70/B10): 50 000 hours

Product no.	Product name	System (W)	Lumen	Color temp.	CRI	Reflector	Color
10123145	Alhama 66cm	21W	2000 lm	4000K	80	Semi-opal	Grey
10122295	Alhama 127cm	36W	4000 lm	4000K	80	Semi-opal	Grey
10122054	Alhama 157 cm	44W	5020 lm	4000K	80	Semi-opal	Grey
10118492	Alhama Dali	44W	5020 lm	4000K	80	Semi-opal	Grey
10121629	*Alhama Ex.	56W	5794 lm	4000K	80	Semi-opal	Yellow

*For more about Ex-classes contact Norlux



norlux.no



Norlux- part of LightGroupNordic