

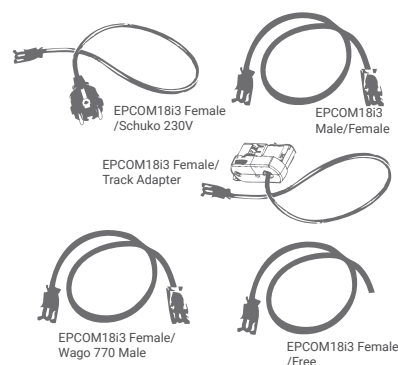


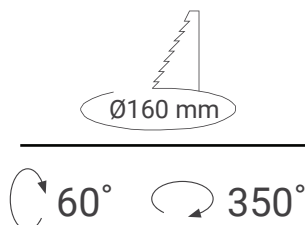

The Apto is a very suitable downlight for use in premises with low ceiling height. The model offers great flexibility in adjusting the light directions. The luminaire is delivered with a EPCOM18i3 connector and there is a rich variety of options for an easy "plug and play" connection of the light fixture. The Apto is available in three different colors. Please see technical table below for details.

LED Downlights
COB LED

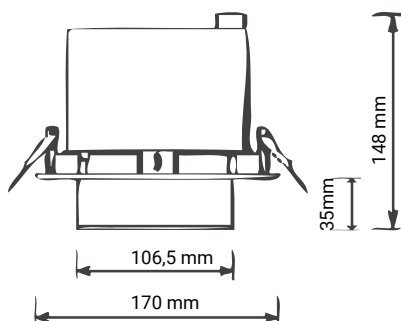

Connection options on request

Dimensions

Cut Size

Life expectancy: 50 000 hours

Product no.	Product name	System (W)	Lumen	Color temp.	CRI	Reflector	Color
01002-15-1	Apto	18W	1950 lm	3000K	80	15°	Grey
01002-15-2	Apto	18W	1950 lm	3000K	80	15°	Black
01002-15-3	Apto	18W	1950 lm	3000K	80	15°	White
01002-30-1	Apto	18W	1950 lm	3000K	80	30°	Grey
01002-30-2	Apto	18W	1950 lm	3000K	80	30°	Black
01002-30-3	Apto	18W	1950 lm	3000K	80	30°	White

831-165-20

Reinforcement base 300x300 mm Ø165 mm

Alu



norlux.no

***Dimming alternatives:**
1-10V dim (Product.no.)-d
Phase dim (Product.no.)-dd
Dali dim (Product.no.)-ddd



Norlux- part of LightGroupNordic