




# Panel

Norlux -the nordic lighting supplier



Panel is a luminaire suitable for interior use. It is design and developed to suite several applications, e.g. Recessed, Surface mount and as Pendant. The Panel has an opal diffuser, 18i3 connector and can be delivered with a variety connector options. Panel can also be delivered with microprismatic diffuser with >UGR19. See the table below for the different dimming options and connector options.

LED Ceiling  
SMD LED

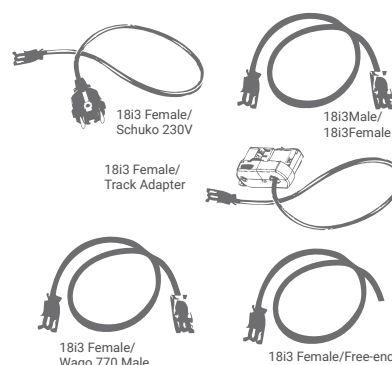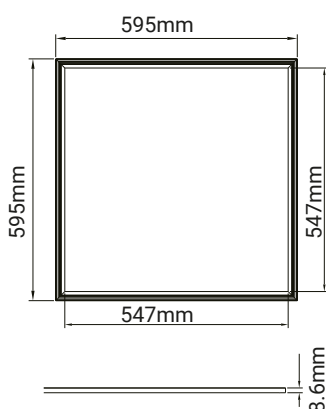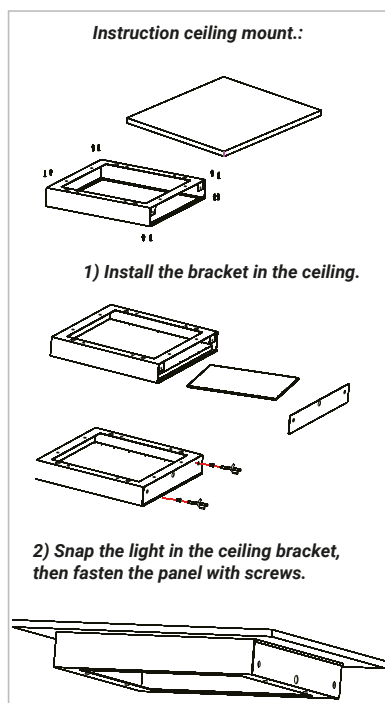

Connection options on request

Simple surface installation with frame

Dimensions

Life expectancy(L70/B50): 36 000 hours

Product no.	Product name	System (W)	Lumen	Color temp.	CRI	Reflector	Color
0330-01-3	Panel Opal no/driver	36W	3500 lm	3000K	80	Opal	White
0340-01-3	Panel Opal no/driver	36W	4400 lm	4000K	80	Opal	White
0330-02-3	Panel Prismatic no/driver	36W	3500 lm	3000K	80	Microprismatic	White
0340-02-3	Panel Prismatic no/driver	36W	4400 lm	4000K	80	Microprismatic	White
0300-01	Surface mount Frame 595x595 for Panel. (603x605x50mm)						White
0300-02	Y-Sling suspension wire for Panel						Steel
0300-03	Driver Fixed	w/Cable: Prim.= 18i3/Sek.=EPN0034					
0300-04	Driver Dali	w/Cable: Prim.= 18i5 Dali/Sek.=EPN0034					
PA-30H2EWN1-10V	Driver 1-10V	w/Cable: Prim.= 18i5 Dali/Sek.=EPN0034					



[norlux.com](http://norlux.com)



Norlux- part of LightGroupNordic