


# Trimo Mini

Norlux -the nordic lighting supplier



Our Trimo range of downlights guarantees a minimum of stray light. This is accomplished by using a recessed LED light source. This model requires a hole dimension of 112mm in diameter making it very versatile providing very powerful light. The Trimo Mini has a EPCOM18i3 connector and is supplied with a variety of connector solutions. Please check the table below.


LED Downlights  
COB LED

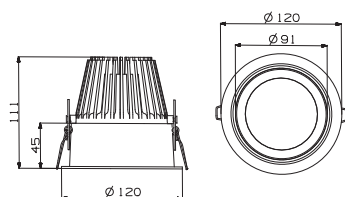

Dimensions



Cut Size

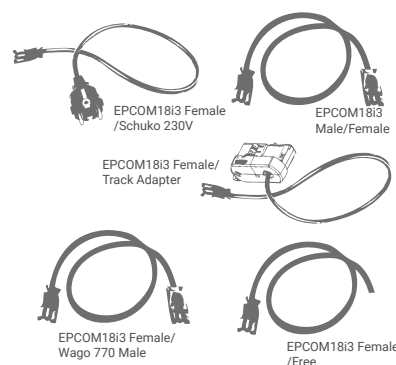

Connection options on request

Life expectancy: 50 000 hours

Product no.	Product name	System (W)	Lumen	Color temp.	CRI	Reflector	Color
18020-24-1	Trimo Mini	22W	2625 lm	3000K	80	24°	Grey
18020-24-2	Trimo Mini	22W	2625 lm	3000K	80	24°	Black
18020-24-3	Trimo Mini	22W	2625 lm	3000K	80	24°	White
18020-40-1	Trimo Mini	22W	2625 lm	3000K	80	40°	Grey
18020-40-2	Trimo Mini	22W	2625 lm	3000K	80	40°	Black
18020-40-3	Trimo Mini	22W	2625 lm	3000K	80	40°	White

831-120-20

Reinforcement base 300x300 mm Ø120 mm

Alu

\*Dimming alternatives:

1-10V dim (Product.no.)-d  
Phase dim (Product.no.)-dd  
Dali dim (Product.no.)-ddd



[norlux.no](http://norlux.no)

Norlux- part of LightGroupNordic