





Trimo Micro

Norlux -the nordic lighting supplier



Tired of downlights giving obtrusive light? This particular model requires a hole dimension of only 90mm. This makes it very versatile with a minimum of stray light, this is accomplished by using a recessed LED light source. The Trimo Micro has a EPCOM18i3 connector and can be supplied with a variety of connector solutions. Please check the table below for an overview of available colors and connectors.

LED Downlights
COB LED

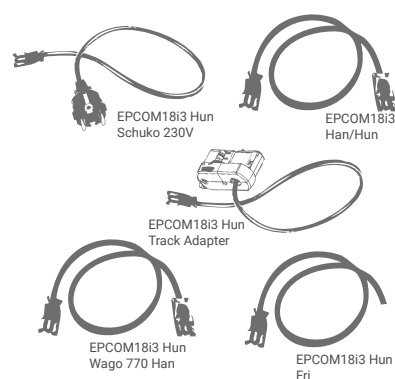

Connection options on request

Dimensions

Cut Size

Life expectancy: 50 000 hours

Product no.	Product name	System (W)	Lumen	Color temp.	CRI	Reflector	Color
18015-30-1	Trimo Micro	13W	1581 lm	3000K	80	30°	Alu
18015-30-2	Trimo Micro	13W	1581 lm	3000K	80	30°	Black
18015-30-3	Trimo Micro	13W	1581 lm	3000K	80	30°	White
831-110-20	Reinforcement base 300x300 mm Ø110 mm						Alu



norlux.no

***Dimming alternatives:**
1-10V dim (Product.no.)-d
Phase dim (Product.no.)-dd
Dali dim (Product.no.)-ddd



Norlux- part of LightGroupNordic