


Performance of rdt3.0 (stop-and-wait)

- U_{sender} : *utilization* – fraction of time sender busy sending
- example: 1 Gbps link, 15 ms prop. delay, 8000 bit packet
 - time to transmit packet into channel:


$$D_{trans} = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microsecs}$$

rdt3.0: stop-and-wait operation

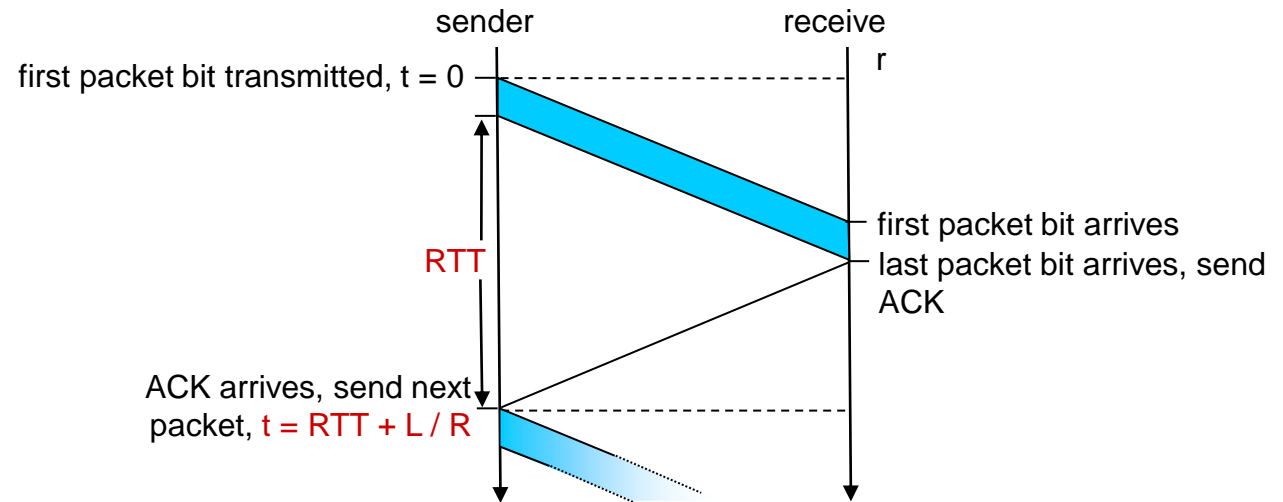

rdt3.0: stop-and-wait operation

$$\begin{aligned}U_{\text{sender}} &= \frac{L / R}{RTT + L / R} \\&= \frac{.008}{30.008} \\&= 0.00027\end{aligned}$$

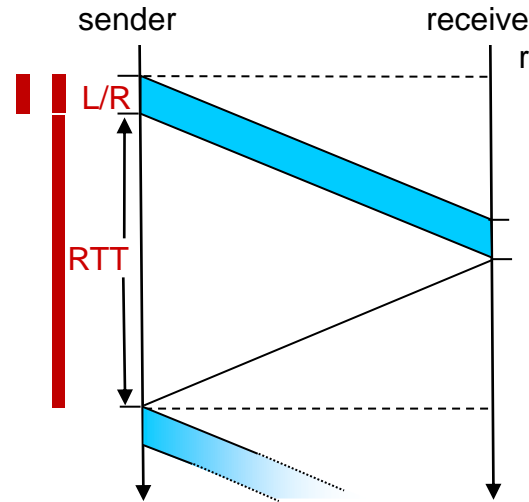


- rdt 3.0 protocol performance stinks!
- Protocol limits performance of underlying infrastructure (channel)

rdt3.0: pipelined protocols operation


pipelining: sender allows multiple, “in-flight”, yet-to-be-acknowledged packets

- range of sequence numbers must be increased
- buffering at sender and/or receiver

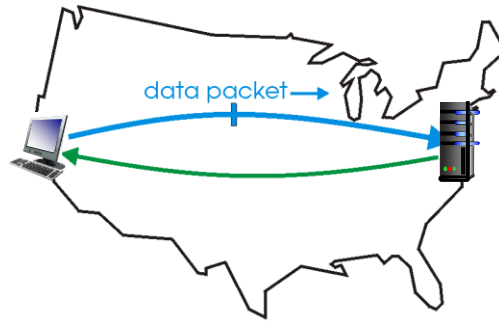

(a) a stop-and-wait protocol in operation

Pipelining: increased utilization

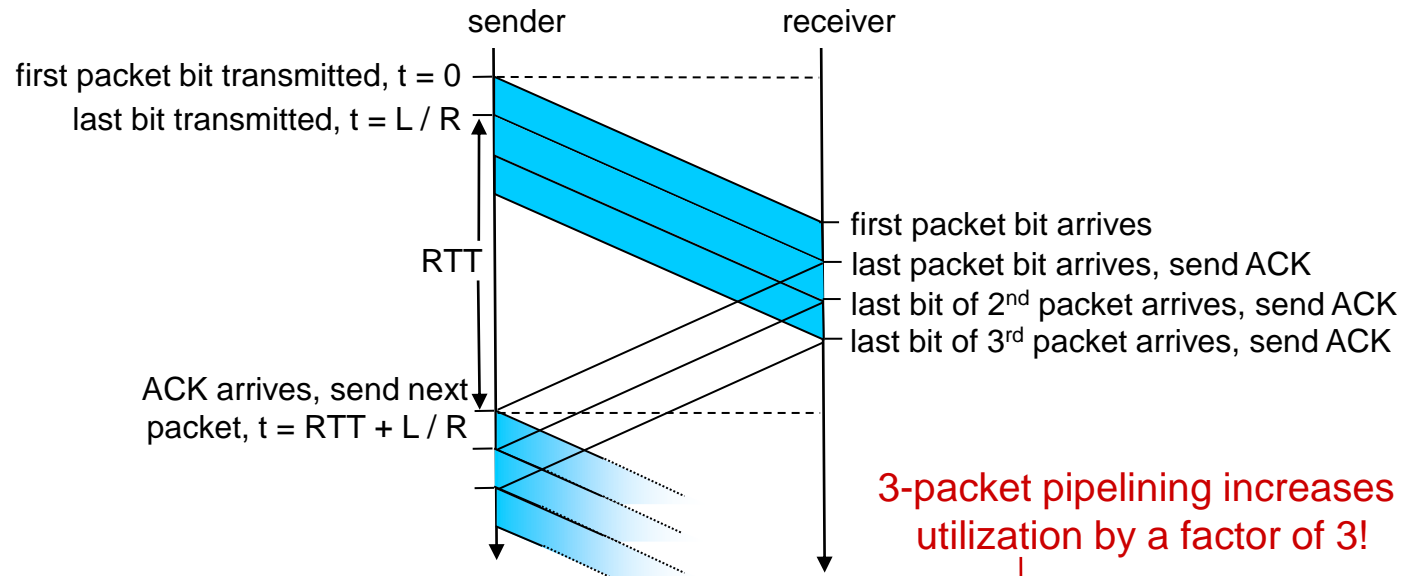


$$U_{\text{sender}} = \frac{3L / R}{RTT + L / R} = \frac{.0024}{30.008} = 0.00081$$

3-packet pipelining increases utilization by a factor of 3!

Go-Back-N: sender

- sender: “window” of up to N , consecutive transmitted but unACKed pkts
 - k -bit seq # in pkt header


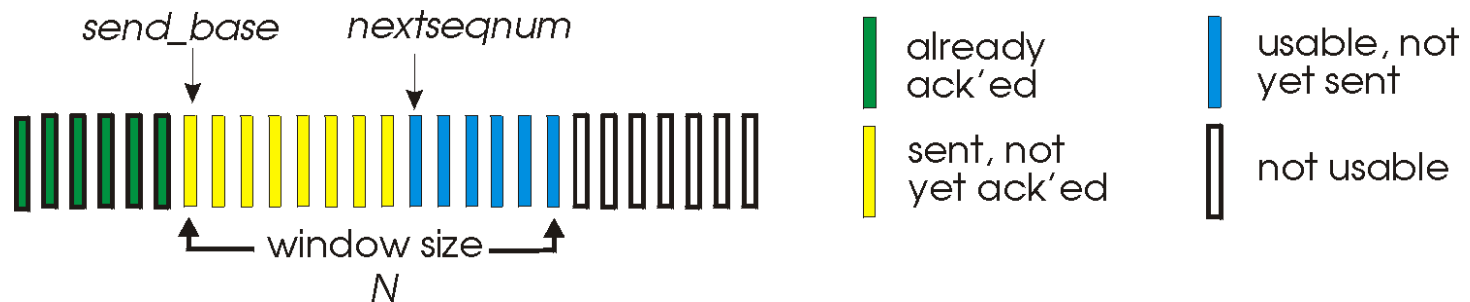


- **cumulative ACK:** $ACK(n)$: ACKs all packets up to, including seq # n
 - on receiving $ACK(n)$: move window forward to begin at $n+1$
- timer for oldest in-flight packet
- $timeout(n)$: retransmit packet n and all higher seq # packets in window


Go-Back-N: receiver

- ACK-only: always send ACK for correctly-received packet so far, with highest *in-order* seq #
 - may generate duplicate ACKs
 - need only remember `rcv_base`
- on receipt of out-of-order packet:
 - can discard (don't buffer) or buffer: an implementation decision
 - re-ACK pkt with highest in-order seq #

Receiver view of sequence number space:

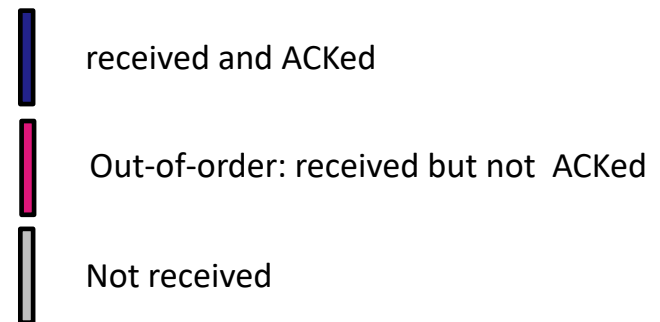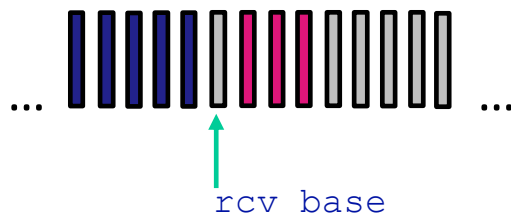


Go-Back-N in action

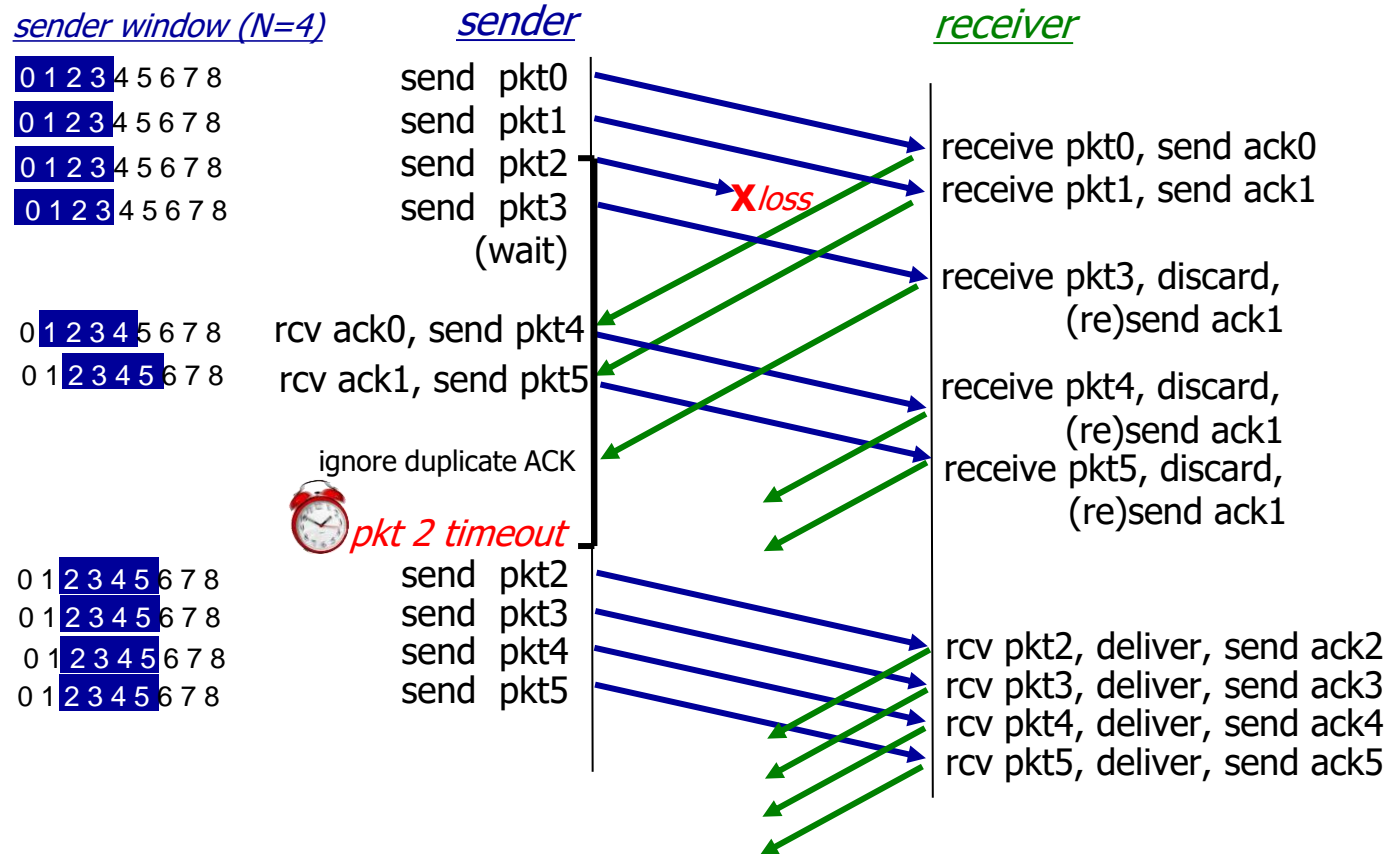

Selective repeat

- receiver *individually* acknowledges all correctly received packets
 - buffers packets, as needed, for eventual in-order delivery to upper layer
- sender times-out/retransmits individually for unACKed packets
 - sender maintains timer for each unACKed pkt
- sender window
 - N consecutive seq #s
 - limits seq #s of sent, unACKed packets

Selective repeat: sender, receiver windows

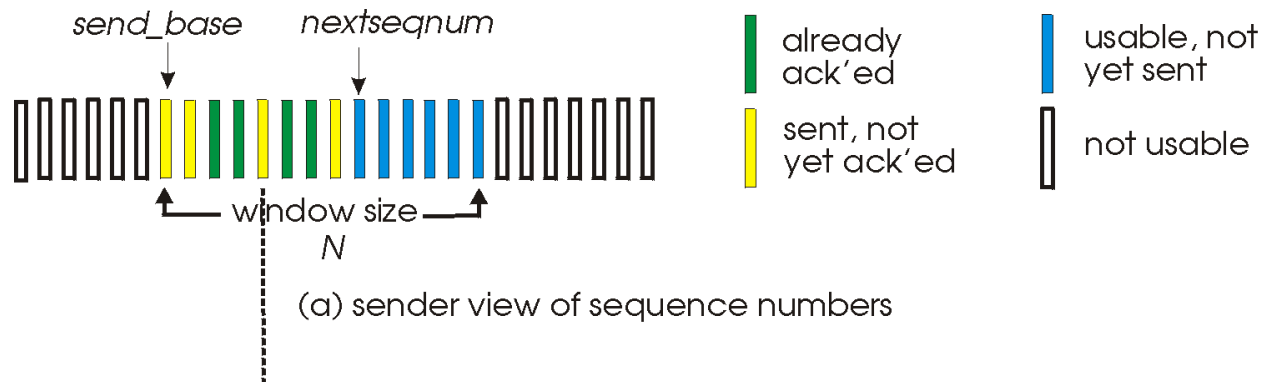

Selective repeat: sender and receiver

sender

data from above:

- if next available seq # in window, send packet

timeout(n):

- resend packet n , restart timer

ACK(n) in [sendbase, sendbase+N]:

- mark packet n as received
- if n smallest unACKed packet, advance window base to next unACKed seq #

receiver

packet n in [rcvbase, rcvbase+N-1]

- send ACK(n)
- out-of-order: buffer
- in-order: deliver (also deliver buffered, in-order packets), advance window to next not-yet-received packet


packet n in [rcvbase-N, rcvbase-1]

- ACK(n)

otherwise:

- ignore



Selective Repeat in action

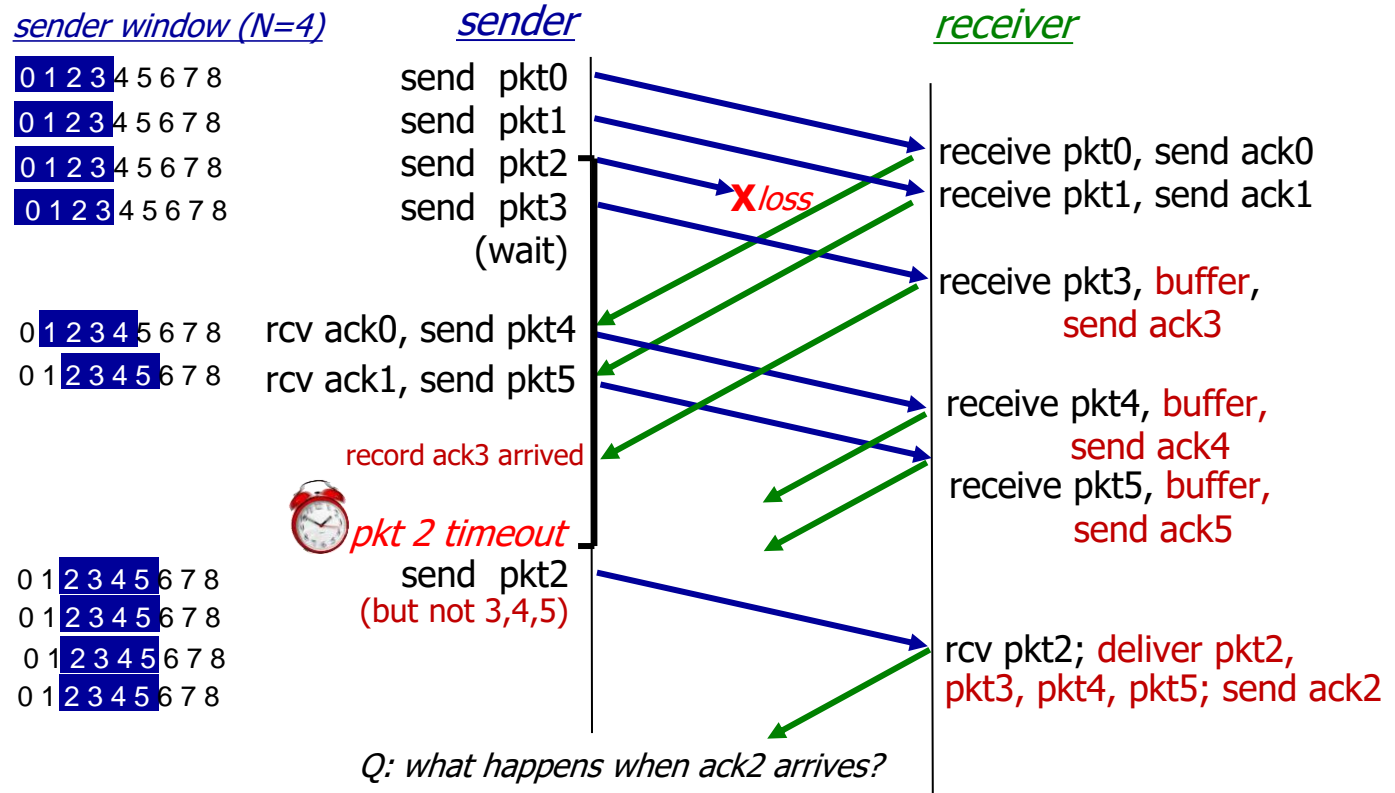

Selective repeat: a dilemma!

example:

- seq #s: 0, 1, 2, 3 (base 4 counting)
- window size=3

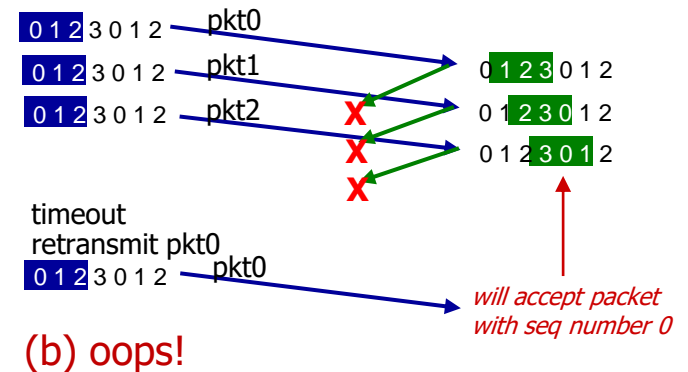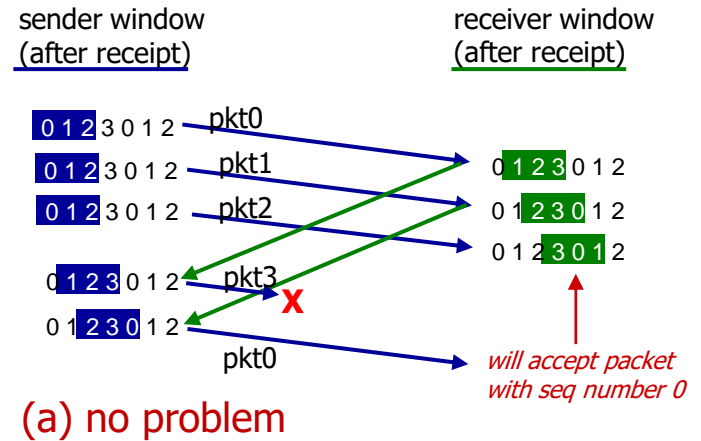


Selective repeat: a dilemma!

example:

- seq #s: 0, 1, 2, 3 (base 4 counting)
- window size=3


Q: what relationship is needed between sequence # size and window size to avoid problem in scenario (b)?

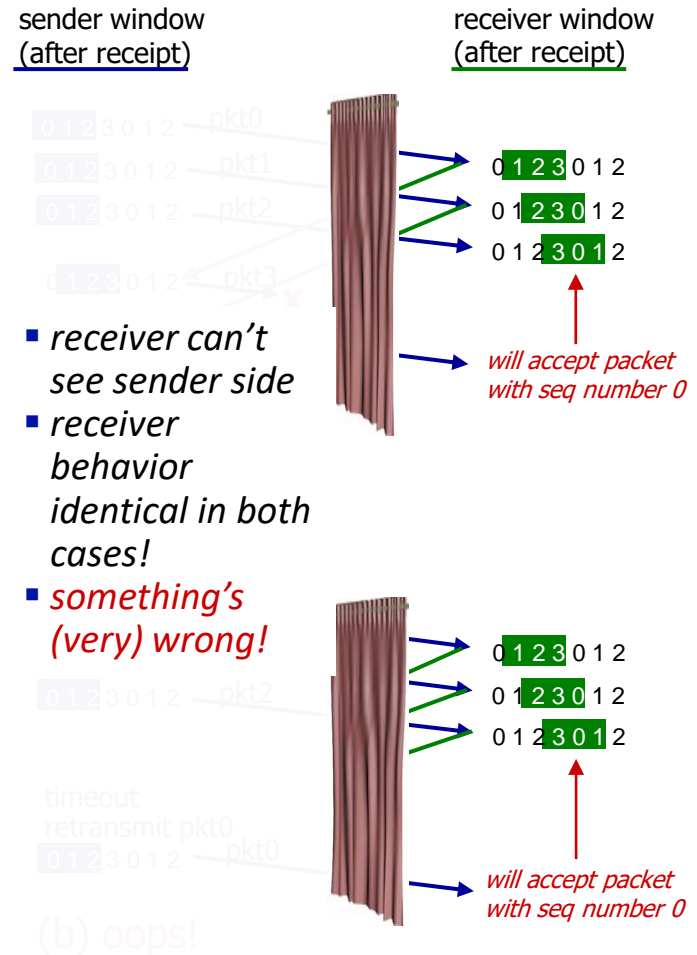






1999

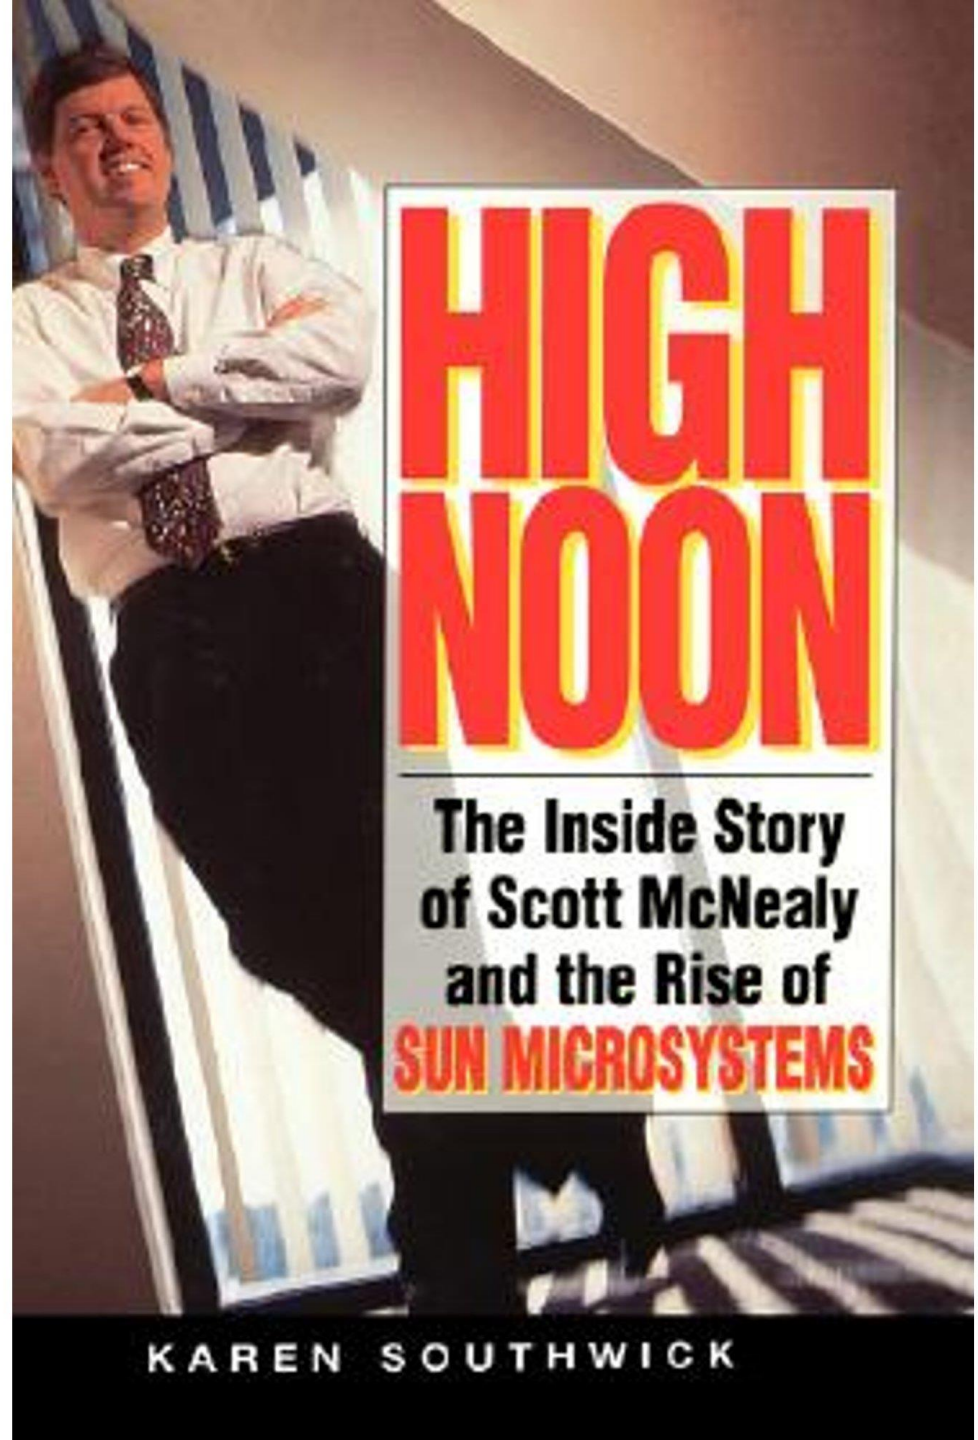





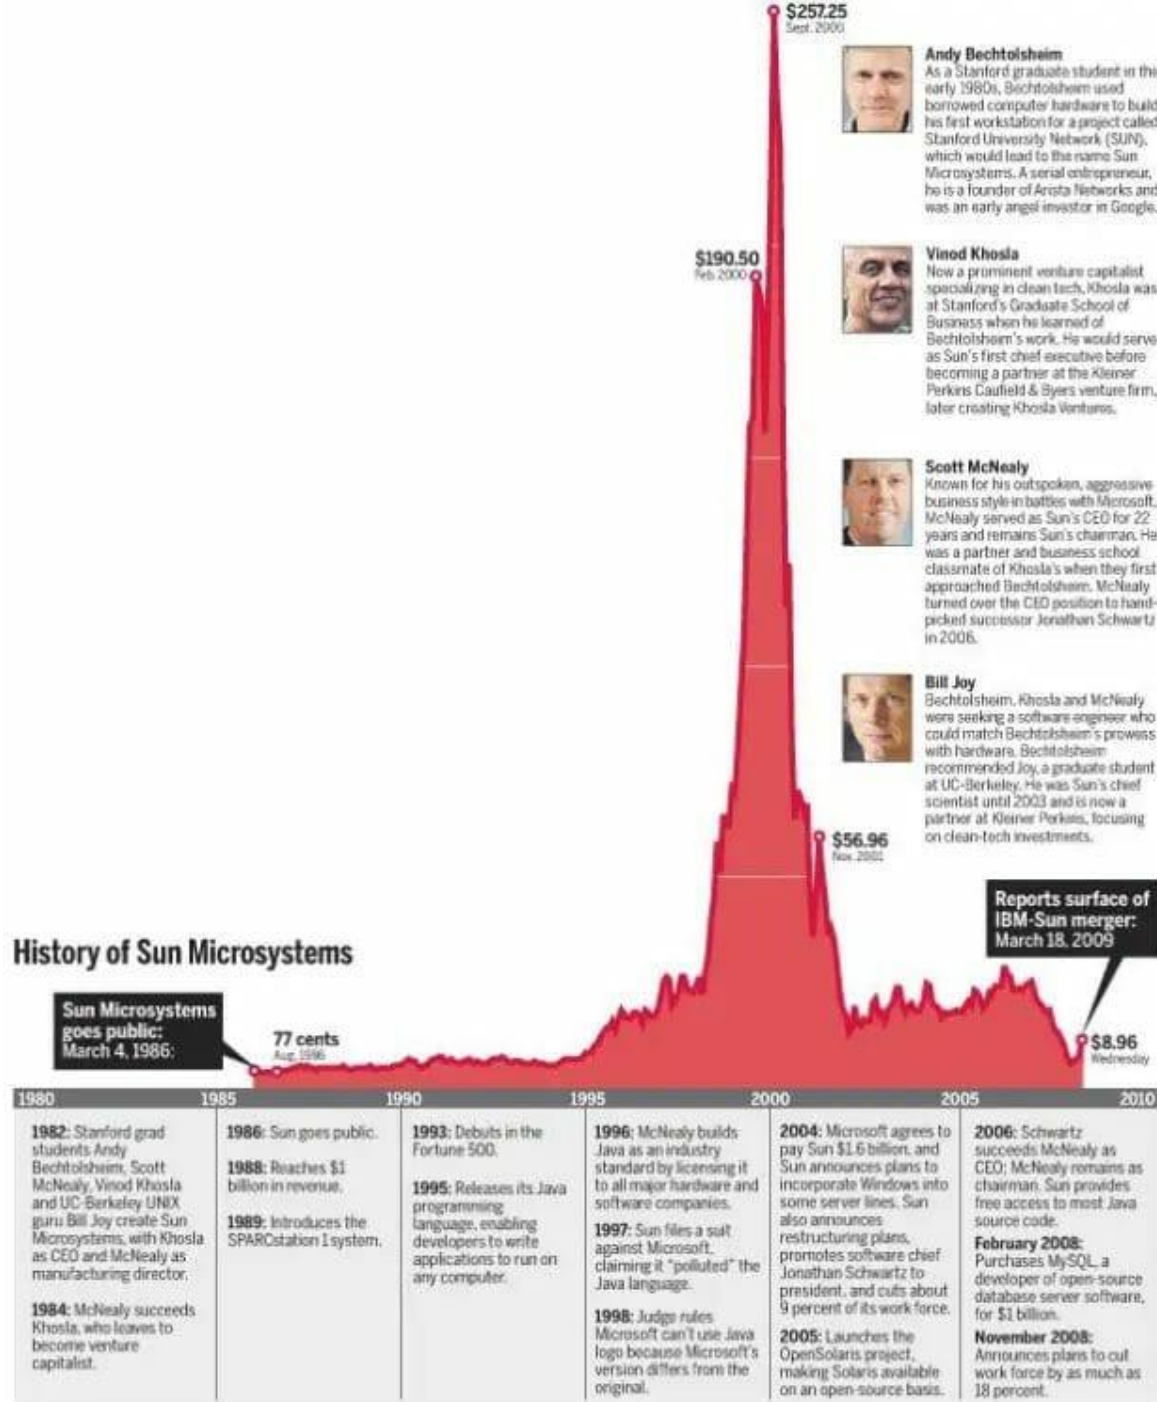

Sources: Hoover's, Mercury News research.

MERCURY NEWS

prashanthpai/ **sunrpc**



ONC RPC (Sun RPC) implementation in Go lang



1

Contributor



0

Issues



16

Stars



9

Forks





Remote Procedure Call (ONC RPC)

From Bloomer, *Power Programming with
RPC*, Chapter 1, and
Comer and Stevens, *Internetworking with
TCP/IP, Volume III*, Chapters 20-22

NJIT

Network Working Group
Request for Comments: 5531
Obsoletes: [1831](#)
Category: Standards Track

R. Thurlow
Sun Microsystems
May 2009

RPC: Remote Procedure Call Protocol Specification Version 2

Status of This Memo

This document specifies an Internet standards track protocol for the Internet community, and requests discussion and suggestions for improvements. Please refer to the current edition of the "Internet Official Protocol Standards" (STD 1) for the standardization state and status of this protocol. Distribution of this memo is unlimited.

Copyright Notice

Copyright (c) 2009 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents in effect on the date of publication of this document (<http://trustee.ietf.org/license-info>). Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Abstract

This document describes the Open Network Computing (ONC) Remote Procedure Call (RPC) version 2 protocol as it is currently deployed and accepted. This document obsoletes [RFC 1831](#).

Oracle To Buy Sun For Approximately \$7.4 Billion – Hold On To Your Hats

4:57 AM PDT • April 20, 2009




Chapter 3: roadmap

- Transport-layer services
- Multiplexing and demultiplexing
- Connectionless transport: UDP
- Principles of reliable data transfer
- **Connection-oriented transport: TCP**
 - segment structure
 - reliable data transfer
 - flow control
 - connection management
- Principles of congestion control
- TCP congestion control



TCP: overview RFCs: 793, 1122, 2018, 5681, 7323

- **point-to-point:**
 - one sender, one receiver
- **reliable, in-order *byte stream*:**
 - no “message boundaries”
- **full duplex data:**
 - bi-directional data flow in same connection
 - MSS: maximum segment size
- **cumulative ACKs**
- **pipelining:**
 - TCP congestion and flow control set window size
- **connection-oriented:**
 - handshaking (exchange of control messages) initializes sender, receiver state before data exchange
- **flow controlled:**
 - sender will not overwhelm receiver

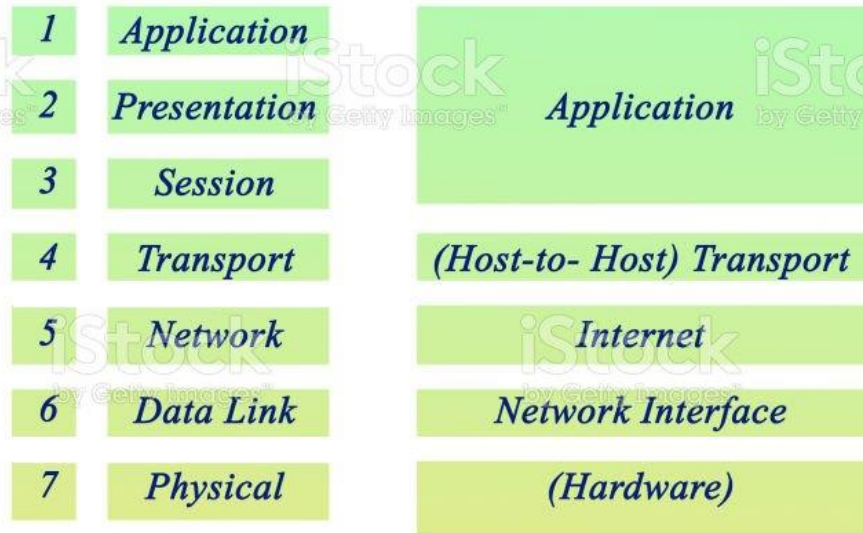

OSI Model

TCP/IP Model



Well-Known" Ports (Numbers)

