120 - 4000

COMON SEMICONDUCTOR

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR
STAND-OFF VOLTAGE - 5.0 TO 440 Volts
1500 Watt Peak Pulse Power

DO-214AB (SMC J-Bend)

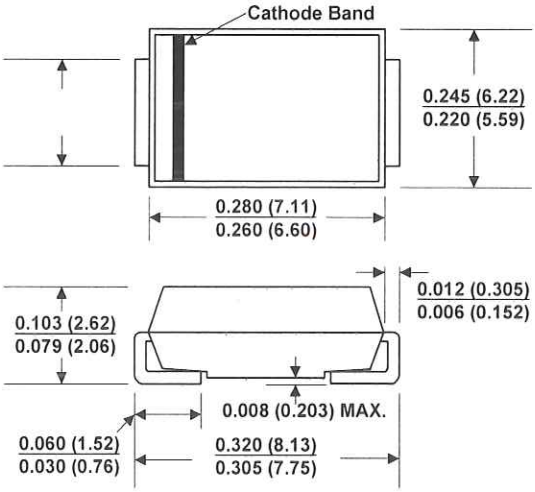

Dimensions in inches and(millimeters)

FEATURES

- ◎ For surface mounted applications in order to optimize board space
- ◎ Low profile package
- ◎ Built-in strain relief
- ◎ Glass passivated junction
- ◎ Low inductance
- ◎ Excellent clamping capability
- ◎ Repetition Rate(duty cycle):0.05%
- ◎ Fast response time: typically less than 1.0ps from 0 Volts to BV min.
- ◎ Typical IR less than 1μA above 10V
- ◎ High temperature soldering: 250°C/10 seconds at terminals
- ◎ Plastic package has Underwriters Laboratory Flammability 94V-O

MECHANICAL DATA

Case

Terminal: Solder plated, solderable per MIL-STD-750 ,Method 2026

Polarity

Standard Packaging: 16mm tape(EIA STD RS-481)

Weight: 0.007ounce, 0.21gram

DEVICES FOR BIPOLAR APPLICATION

For Bidirectional use C or CA Suffix for types SMCJ5.0 thru types SMCJ170 (e.g. SMCJ5.0C , SMCJ170CA)
Electrical characteristics apply in both directions

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation on 10/1000 μs waveform (Note 1,2,FIG.1)	P_{PPM}	Minimum 1500	Watts
Peak Pulse Current of on 10/1000 μs waveform (Note 1,FIG.3)	I_{PPM}	SEE TABLE 1	Amps
Peak Forward Surge Current,8.3ms Single Half Sine-Wave Superimposed on Rated Load,(JEDEC Method) (Note 2,3)	I_{FSM}	200	Amps
Operating junction and Storage Temperature Range	T_J , T_{STG}	-55 to + 150	℃

Notes :

1.Non-repetitive current pulse , per Fig. 3 and derated above T_A = 25℃ per Fig. 2 .

2.Mounted on 8.0mm x 8.0mm Copper Pads to each terminal

3.8.3ms single half sine-wave , or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.