

**Planks**  
TILES COLLECTION  
**200 X 1200MM**

**SOMANY**

Tiles | Bathware

ZAMEEN SE JUDEY

**NEW**  
**ARRIVAL**



INTRODUCING

**200X  
1200mm**

PLANKS TILES COLLECTION

# WELCOMING ALLURE OF PLANKS...

Ceramic tiles that imitate the beauty of planks in Matt Look, having the features parallel to GVT make your space elegant. It is a preferred choice of architects & interior designers to outline distinctive spaces, with its unique patterns, shades & matchless natural look.

NATURAL  
TEXTUREPROTECTING  
NATURENATURAL  
FEELINGECO-FRIENDLY  
& HYGIENICRESISTANCE  
TO UV RAYS

FIREPROOF



# Planks

SIZE  
200 X 1200MM


FINISH  
MATT

THICKNESS  
10MM

SOMANY



ESSENTIA ALBAWOOD HAYA



# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA ALBAWOOD HAYA

random - 08

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA ALBAWOOD TEAK

random - 08



Easy To Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print

# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA AUSTINWOOD DECORE

random - 03

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA AUSTINWOOD NATURAL

random - 02



Easy To  
Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance




Random Print



ESSENTIA CERVINO NATURAL

random - 04

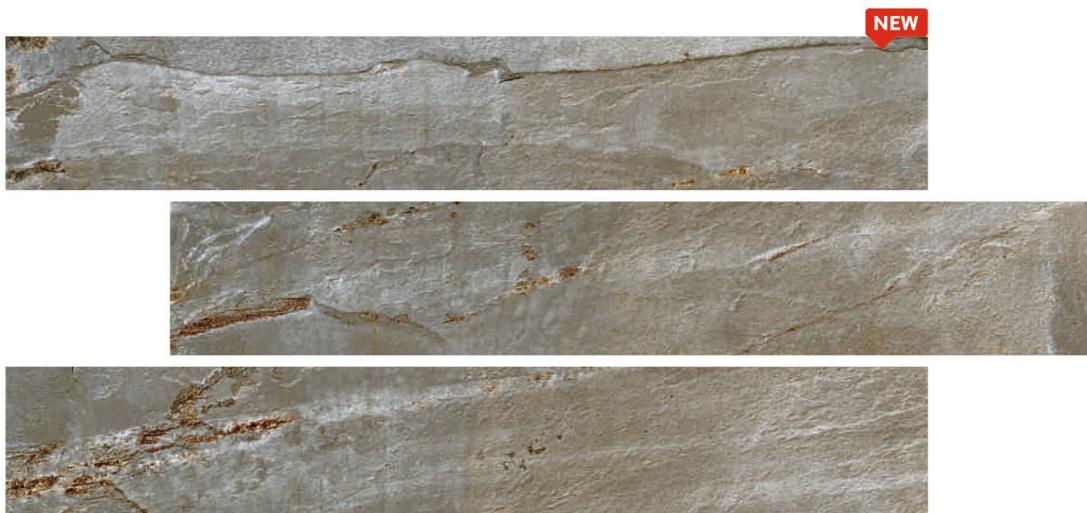

ESSENTIA DALBERT BEIGE

random - 03



Easy To Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print

# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®



ESSENTIA EDORTA COFFEE




# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®

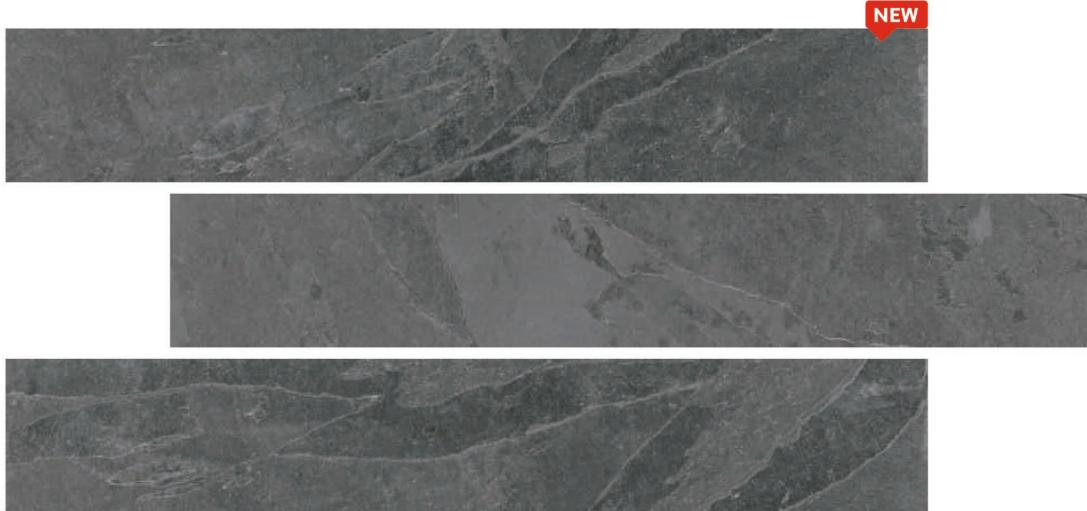

ESSENTIA DOMENICO GREY

random - 04



ESSENTIA EDORTA BROWN

random - 04



Easy To Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print

# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®

NEW



ESSENTIA EDORTA COFFEE

random - 04

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA LORCAWOOD WENGE

random - 06



Easy To  
Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print

# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA MATEOWOOD DECOR 01

random - 04

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA MATEOWOOD TEAK

random - 07



Easy To  
Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print


# Planks

SIZE  
200 X 1200MMFINISH  
MATTTHICKNESS  
10MM

SOMANY



ESSENTIA MATEOWOOD TEAK  
ESSENTIA MATEOWOOD DECOR 01



# Planks

SIZE  
200 X 1200MM

FINISH  
MATT

THICKNESS  
10MM

SOMANY®

GOODWOOD  
ORIGINAL PORCELAIN PRODUCT

NEW



ESSENTIA MATEWOOD DECOR 02

random - 04

NEW



ESSENTIA OBERRON NATURAL

random - 04



Easy To  
Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print

# Planks

SIZE  
200 X 1200MM


FINISH  
MATT

THICKNESS  
10MM

SOMANY®



ESSENTIA SIGNO TRAVERTINO MARFIL

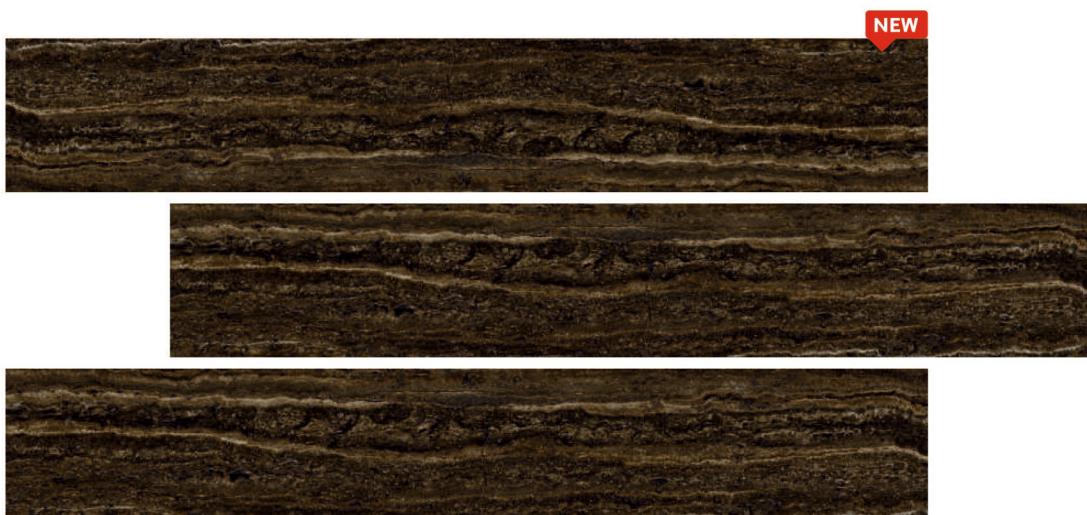

ESSENTIA SIGNO TRAVERTINO CAFÉ



Easy To  
Maintain



First Ever  
Eco-Friendly



Zero  
Maintenance



Random Print

## PACKAGING DETAIL FOR 200X1200MM PLANKS TILES

Nominal Size	Thickness(mm)	No. of Tiles per carton	Av. Weight per carton (Kg)	Coverage area per carton
200 x 1200 mm	10.3 (+/-0.2)	4	21.3 (+/-0.2)	0.96 Sq.Mtr

## TECHNICAL SPECIFICATION FOR 200X1200MM PLANKS TILES

					Test Method	
	Characteristics	Requirements as per IS 15622 :2017 Table-07 3<E≤6 Group BIIa	Requirement as per ISO 13006, Annex-J, 3 < E ≤ 6 Group BIIa	Our Value for 200 X 1200 mm Rectified	IS-13630	ISO 10545
<b>A</b>	<b>Dimension &amp; Surface Quality</b>					
i	Length & Width	± 0.10%	± 0.30%	± 0.10%	PART 1	PART 2
ii	Thickness	± 5.0%	± 5.0%	± 4.0%	PART 1	PART 2
iii	Straightness of Side	± 0.10%	± 0.3%	± 0.10%	PART 1	PART 2
iv	Rectengularity	± 0.10%	± 0.3%	± 0.10%	PART 1	PART 2
v	Surface Flatness					
a	Center curvature (%) (Max. Deviation)	± 0.5%	±0.4%	± 0.4 %	PART 1	PART 2
b	Edge curvature (%) (Max. Deviation)	± 0.5%	±0.4%	± 0.4 %	PART 1	PART 2
c	Corner warpage (%) (Max. Deviation)	± 0.5%	±0.4%	± 0.4 %	PART 1	PART 2
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects.	95 % of tiles will be free from visible defects.	Min. 95 % of tiles will be free from visible defects.	PART 1	PART 2
<b>B</b>	<b>Physical Properties</b>					
i	Water Absorption	Average 3%<E≤6%, Individual Maximum 6.2	3%<E≤6%, Individual max 6.5%	5.5±0.5%	PART 2	PART 3
ii	Modulus of Rupture [N/mm <sup>2</sup> ]	Av 22 , Individual 20 min C	Av 22, Individual 20 min	Min 28	PART 6	PART 4
iii	Breaking Strength in N	Min. 1000	Not less than 1000	Min. 1100	PART 6	PART 4
iv	Moisture Expansion in mm/m	0.03 MAX	'Test Method Available	0.03 MAX	PART 3	PART 10
v	Scratch Hardness of surface (Mohs)	Minimum 4	NA	Min 5	PART 13	
vi	Resistance to Deep Abrasion of unglazed tiles	NA	NA	NA	PART 12	PART 6
vii	Resistance to Abrasion of glazed tiles ( Class I to V )	Commercial application Min IV, Home Application Min II	Report Abrasion Class & Cycle Passed	PEI-IV (5000 Revolution)	PART 11	PART 7
viii	Coefficient of linear thermal expansion from embiant temperature to 100° C	9 X 10 <sup>-6</sup> K <sup>-1</sup> , max	Test Method Available	8 X 10 <sup>-6</sup> K <sup>-1</sup> max	PART 4	PART 8
ix	Thermal Shock Resistance	10 cycle min	Test Method Available	Passed 10 cycle	PART 5	PART 9
x	Crazing Resistance	4 cycle @ 7.5bar min	Required	Passed 4 cycle	PART 9	PART 11
xi	Forst resistance	Required , if agreed	Test Method Available	Resistance	PART 10	PART 12
xii	Bulk Density	NA	NA	NA	PART 2	
xiii	Impact resistance	NA	Test Method Available	NA	PART 14	PART 5
<b>C</b>	<b>Chemical Resistance (glazed Tiles)</b>					
i	Stain Resistance	Min Class 1	Min. Class 3	Min Class-1	PART 8	PART 14
ii	Resistance to household chemicals	Min Class AA	Min. Class B	Min Class AA	PART 8	PART 13
iii	Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Manufacturer to state classification	Min Class AA	PART 8	PART 13

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. Technical Specifications for Somany Wall & Floor Tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.



# SOMANY<sup>®</sup>

**Somany Ceramics Limited : Noida:** F-36, Sector- 6; Ph.: 0120-4627900.

**Ahmedabad:** Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

[www.somanyceramics.com](http://www.somanyceramics.com) | e-mail [marketing@somanyceramics.com](mailto:marketing@somanyceramics.com)

**Toll Free No. 1800-103-0004** (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:  
[www.somanyceramics.com](http://www.somanyceramics.com)



Find us at:  
[www.facebook.com/SomanyCeramic](http://www.facebook.com/SomanyCeramic)



Find us at:  
[www.twitter.com/SomanyCeramic](http://www.twitter.com/SomanyCeramic)

