VESCA

MARITIME STRUCTURE CATHODIC PROTECTION FOR A SUSTAINABLE TOMORROW



KATALOG PRODUK

ZINC & ALUMINIUM CATHODIC PROTECTION

Solusi perlindungan jangka panjang untuk struktur maritim dan industri, dengan kualitas material terbaik dan standar internasional.

- Kualitas Terjamin
- Material Berkualitas Tinggi
- Standar Internasional
- Pengalaman 25+ Tahun

PT. VESCARINDO UTAMA

Jl. H.Gemon No. 39 Pondok Kelapa Jakarta Timur

021-86902769 / 86902092

Vescarindoutama@yahoo.co.id

MATERIAL COMPOSITION ALUMINIUM

Aluminium anodes are cast in alloy of aluminium, zinc and indium additions and have been development specifically for use in sea water and sea mud. The VESCA aluminium anodes are cast from the highest purity aluminium ingot to conform with the following material composition.





MATERIAL COMPOSITION AND TECHNICAL DATA

Element	Persentage (%)
Cadmium	2.0 – 5.0
Copper	0.005 – 0.035
Iron	0.01 – 0.05
Silicon	0.15 max
Aluminium	0.13 max
Lead	0.006 max
Zinc	0.02 max ea
Zinc	remainder

Data Performa

- Nominal solution potential
  -1.10 volt against Ag/AgCl
- Nominal electrical capacity
  2700 Ampere hour per kg
- Nominal comsumption
  3.24 Kg Amp/yrs
- Nominal Driving voltage
  0.3 volts against polarized steel

VESCA

Alumunium

Aluminium anode for ship hull welding type

TYPE	Dimensi anoda (L x W x T) mm	Dimensi core (P x L x T) mm	Berat Nett (Kg)	Berat Gross (Kg)
AV-140	200 x 95 x 30	300 x 25 x 6	1.2	1.4
AV-320	380 x 145 x 30	350 x 40 x 6	2.6	3.2
AV-450	380 x 150 x 35	530 x 50 x 6	4.5	5.2
AV-550	380 x 150 x 40	530 x 50 x 6	5.5	6.0
AV-720	520 x 117 x 46	650 x 50 x 6	7.2	8.0
AV-860	520 x 117 x 52	650 x 50 x 6	8.6	9.8
AV-126	520 x 117 x 67	650 x 50 x 6	12.6	13.9
AV-141	915 x 130 x 50	1015 x 50 x 6	14.1	16.0
AV-210	915 x 130 x 75	1015 x 50 x 6	21.0	24.0
AV-300	920 x 130 x 140	1015 x 50 x 6	30.0	33.0



VESCA

Alumunium

Aluminium anode for ship hull Bolt type

TYPE	Dimensi anoda (L x W x T) mm	Dimensi Core (PCD)	Berat Nett (Kg)	Berat Gross (Kg)
B2	150 × 70 × 20	Bolts @ 75 mm between Ctrs	0.3	0.5
B3	200 × 100 × 20	Bolts @ 110 mm between Ctrs	0.8	1.0
B4	200 × 100 × 30	Bolts @ 110 mm between Ctrs	1.15	1.4
B4E	200 × 100 × 40	Bolts @ 110 mm between Ctrs	1.5	1.8
B8	300 × 150 × 25	Bolts @ 160 mm between Ctrs	2.5	2.9
B9	300 × 150 × 30	Bolts @ 160 mm between Ctrs	2.9	3.3
B9E	300 × 150 × 40	Bolts @ 160 mm between Ctrs	4.2	4.6
B9F	300 × 150 × 50	Bolts @ 160 mm between Ctrs	5.1	5.5
B11	300 × 150 × 75	Bolts @ 160 mm between Ctrs	9.2	9.6






VESCA

Aluminium Rod Anodes



TYPE	Weight (Kg)	Length (mm)	Diameter (mm)
AVR-101	0.4	10	70
AVR-102	0.4	15	100
AVR-103	4.9	50	150
AVR-104	0.4	300	30
AVR-105	0.8	300	25
AVR-106	1.6	300	25
AVR-107	2.3	300	30
AVR-108	4.1	300	40
AVR-109	6.5	300	50
AVR-110	9.3	300	60
AVR-111	12.7	300	70
AVR-112	16.5	300	80
AVR-113	20.9	300	90
AVR-114	25.9	300	100
AVR-115	31.3	300	110
AVR-116	37.2	300	120
AVR-117	43.7	300	130

Aluminium Rod Anodes

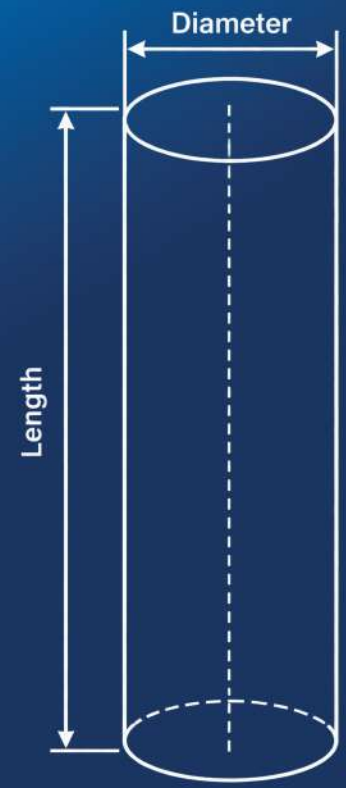


PLATFORM OR JETTY Aluminium Anodes

TYPE	Anode Length (mm)	Anode Weight (mm)	Anode Height (mm)	Core extension (mm)	Core diameter (mm)	Net Weight (Kg)	Gross Weight (Kg)
AVS-45	1320	102	102	152	19	35	38
AVS-68	1525	135	130	152	19	68	72
AVS-119	1550	184	159	152	25	119	126
AVS-148	2440	160	162	152	60	148	170
AVS-240	2750	207	207	152	114	240	306
AVS-330	2440	252	244	152	114	330	391
AVS-435	3000	254	257	152	114	435	507
AVS-565	3048	283	283	152	114	565	640





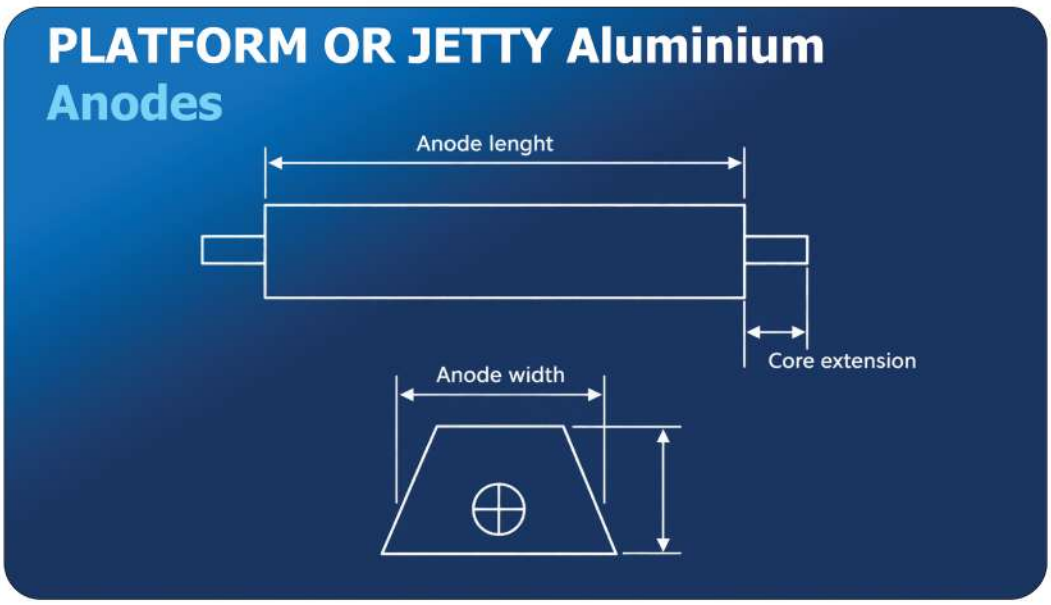

VESCA

MATERIAL COMPOSITION ZINC

VESCA zinc andoes with the US Military Specification A-1800-J, the trade standard in general use worldwide. Our anodes are cast from 99.995% purity zinc alloy with small additions of special alloy element.





MATERIAL COMPOSITION AND TECHNICAL DATA

Element	A-1800-H	A-1800-J
Cadmium	0.025 – 0.15	0.025 – 0.07
Copper	0.005 max	0.005 max
Iron	0.005 max	0.005 max
Silicon	0.125 max	-
Aluminium	0.1 – 0.50	0.10 – 0.50
Lead	0.006 max	0.006 max
Zinc	remainder	remainder

Data Performa

- Nominal solution potential
  -1.05 volt against Ag/AgCl
- Nominal electrical capacity
  780 Ampere hour per kg
- Nominal comsumption
  11.25 Kg Amp/yrs
- Nominal Driving voltage
  0.25 volts against polarized steel

VESCA

ZINC

Zinc anode for ship hull welding type

TYPE	Dimensi anoda (L x W x T) mm	Dimensi core (p x l x t) mm	Berat Nett (Kg)	Berat Gross (Kg)
S-2	150 x 70 x 20	230 x 24 x 3	1.87	2.0
S-3	200 x 100 x 20	300 x 38 x 3	2.60	3.0
S-4	200 x 100 x 30	300 x 38 x 3	3.80	4.2
S-6	300 x 150 x 20	270 x 30 x 4	5.75	6.0
S-8	300 x 150 x 25	270 x 30 x 4	7.25	8.0
S-9	300 x 150 x 30	270 x 30 x 4	8.75	9.5
ZV-320	270 x 150 x 32	350 x 40 x 6	5.5	6.0
ZV-450	400 x 150 x 32	530 x 40 x 6	11.1	12.1
ZV-165	550 x 150 x 25	650 x 40 x 6	16.5	18.0



VESCA

ZINC

Zinc anode for ship hull B series

TYPE	Dimensi anoda (L x W x T) mm	Dimensi Core (PCD)	Berat Nett (Kg)	Berat Gross (Kg)
B2	150 x 70 x 25	Bolts @ 75 mm between Ctrs	1.1	1.5
B3	200 x 100 x20	Bolts @ 110 mm between Ctrs	2.2	2.5
B4	200 x 100 x 30	Bolts @ 110 mm between Ctrs	3.3	3.6
B6	300 x 150 x 20	Bolts @ 160 mm between Ctrs	5.5	5.75
B8	300 x 150 x 25	Bolts @ 160 mm between Ctrs	6.9	7.3
B9	300 x 150 x 30	Bolts @ 160 mm between Ctrs	8.2	8.5
B9E	300 x 150 x 40	Bolts @ 160 mm between Ctrs	10.6	11.0
B9F	300 x 150 x 50	Bolts @ 160 mm between Ctrs	13.4	13.8




ZINC TANK ANODE

TYPE	Anode Length (mm)	Anode Weight (mm)	Anode Height (mm)	Core extension (mm)	Core diameter (mm)	Net Weight (Kg)	Gross Weight (Kg)
ZVT-212	1220	227	51	51	12	21.2	22.7
ZVT-304	1220	227	60	60	12	30.4	32.0
ZVT-318	1220	227	63	63	12	31.8	33.4
ZVT-450	1220	227	76	76	12	45.0	46.6
ZVT-500	1525	227	70	70	12	50.0	52.0





ZINC TANK
Anodes

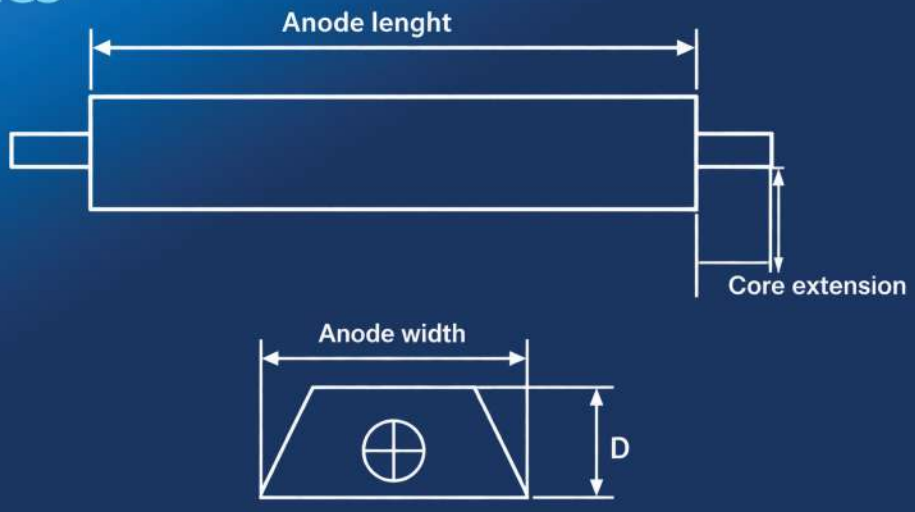

VESCA

Anodes ZINC ROD



TYPE	Weight (Kg)	Length (mm)	Diameter (mm)
AVR-101	1.1	10	70
AVR-102	3.3	15	100
AVR-103	12.5	50	150
AVR-104	1.0	300	30
AVR-105	2.1	300	25
AVR-106	4.2	300	25
AVR-107	6.0	300	30
AVR-108	10.7	300	40
AVR-109	16.7	300	50
AVR-110	24.1	300	60
AVR-111	24.1	300	70
AVR-112	42.8	300	80
AVR-113	54.1	300	90
AVR-114	66.8	300	100
AVR-115	80.8	300	110
AVR-116	96.2	300	120
AVR-117	112.9	300	130

ZINC ROD
Anodes



BIRO KLASIFIKASI INDONESIA

SERTIFIKAT PERSETUJUAN TIPE
Type Approval Certificate

☐ *ACS* ☒ *Non ACS*

No. 00212.25.TP02195

No. Persetujuan : **00518TA26**
No. of Approval

Tanggal Persetujuan : **26 Desember 2025**
Date of Approval

Dengan ini dinyatakan bahwa produk dibawah ini telah memenuhi dan disetujui berdasarkan persyaratan dari
This is to certify that the following products has been complied and approved in accordance with requirements of
Peraturan dan/atau Standard yang tercantum dibawah ini:
the Rules and / or Standards listed below:

Produk
Product : **SACRIFICIAL ANODES**

Pembuat
Manufacturer : **PT. VESCARINDO UTAMA**
Jl. Narogong KM. 12 Pangkalan 2 Cikiwul, Gg. Blaung RT. 004 / RW. 003, Bantar Gebang, Bekasi

Tipe Produk
Type Designation : **VESCA ALUMINIUM ANODE AVW (KI-Al1) & AVB (KI-Al1)**

Standard Persetujuan
Approval Standards : Rules for Approval of Manufacturers and Service Suppliers (Pt.1, Vol.XI)
Guidance for The Approval and Type Approval of Materials and Equipment for Marine Use (Pt.1, Vol.W)

Sertifikat ini berlaku hingga tanggal yang ditetapkan di bawah dengan syarat pemeriksaan periodik
This certificate remains valid until the date set below provided that periodical surveillances
dilakukan tepat waktu dan setiap perubahan atau modifikasi pada produk diberitahukan ke BKI.
are carried out on time and any alterations or modifications to the approved product notified to BKI

Sertifikat ini berlaku sampai dengan : **25 Desember 2030**
This certificate is valid until

Jakarta, 31 Desember 2025

A.n Direktur Operasi Bisnis Klasifikasi
VP Operasi Bisnis Klasifikasi
O.b Director of Classification Business Operation
VP of Classification Business Operations

MUNIR MURADI
NUP:83011-KI

Catatan : Sertifikat ini terdiri dari 3 halaman
Note *This certificate is consist of 3 pages*

Jika Peraturan atau Standard yang digunakan dalam proses persetujuan mengalami perubahan pada saat sertifikat ini masih berlaku, maka produk harus dilakukan persetujuan ulang sebelum dapat dipasang dikapal dimana Peraturan atau Standard tersebut berlaku.
Should the specified Rules or Standards be amended during the validity of this certificate, the product is to be reapproved prior to it being placed on board vessels to which the amended Rules or Standards apply.

Lampiran
Annex to
Sertifikat Persetujuan Tipe
Type Approval Certificate

No. Sertifikat : **00212.25.TP02195**
No. of Certificate

No. Persetujuan : **00518TA26**
Approval no.

Deskripsi Produk
Product Description

Sacrificial anodes produce by PT. VESCARINDO UTAMA which the specification of chemical composition equivalent to KI-Al1.

Kondisi Persetujuan
Condition of Approval

1. The approval is given only to the sacrificial anode material rather than to the anode design.
2. The average current capacity of the sacrificial anode Aluminium based tested for 4 days at 20^{0}C (± 3^{0}C) according to BKI Guidance for the Corrosion Protection and Coating System (Pt. 1, Vol. G) 2.858 Ah/kg with closed circuit potential -1,13 V vs Ag/AgCl/Seawater.
3. Individual product certification is not required.

Dokumentasi Persetujuan
Approval Documentation

1. BKI Assessment Report No. 02195-TP/C1/2025.
2. Test report for Chemical analysis and potential test report issued by FAKULTAS TEKNIK-UNIVERSITAS INDONESIA dated 7 August 2025 with report no. L0302 and contract no. L0302/PT.02/FT04/P/2025.

Penandaan Produk
Marking of Product

The product or packing shall be marked with manufacturer's name, trademark, grade and No. of BKI approval **00518TA26**.

Pemeriksaan Periodik
Periodical Surveillance

For retention of the approval, a BKI Surveyor shall conduct periodical surveillance to verify that approved documentation, quality system, etc. of the manufacturing works are maintained satisfactorily.

The main scope of the periodical surveillance will normally include:
- Verification of the manufacturer's production and quality system with regard to ensure continued consistent production of the products at the manufacturer's premises
- Review of the approval documentation and that this is still used as basis for the production
- Review of possible changes to the properties of the product
- Verification of the product marking.

Spectro Meter

Spectro Meter Analisys Machine





