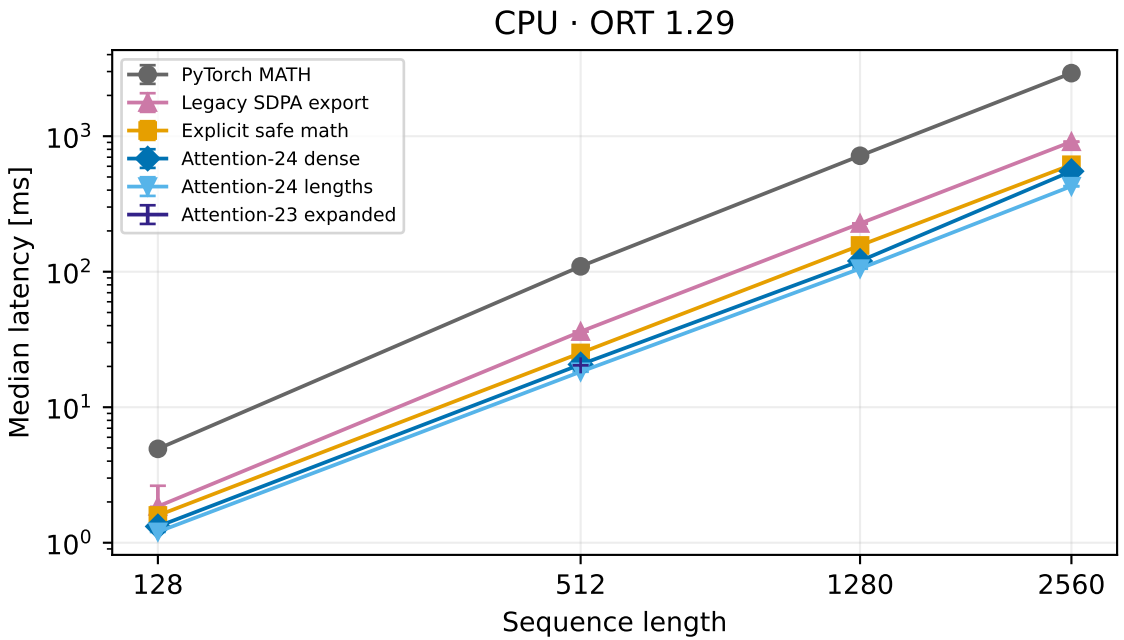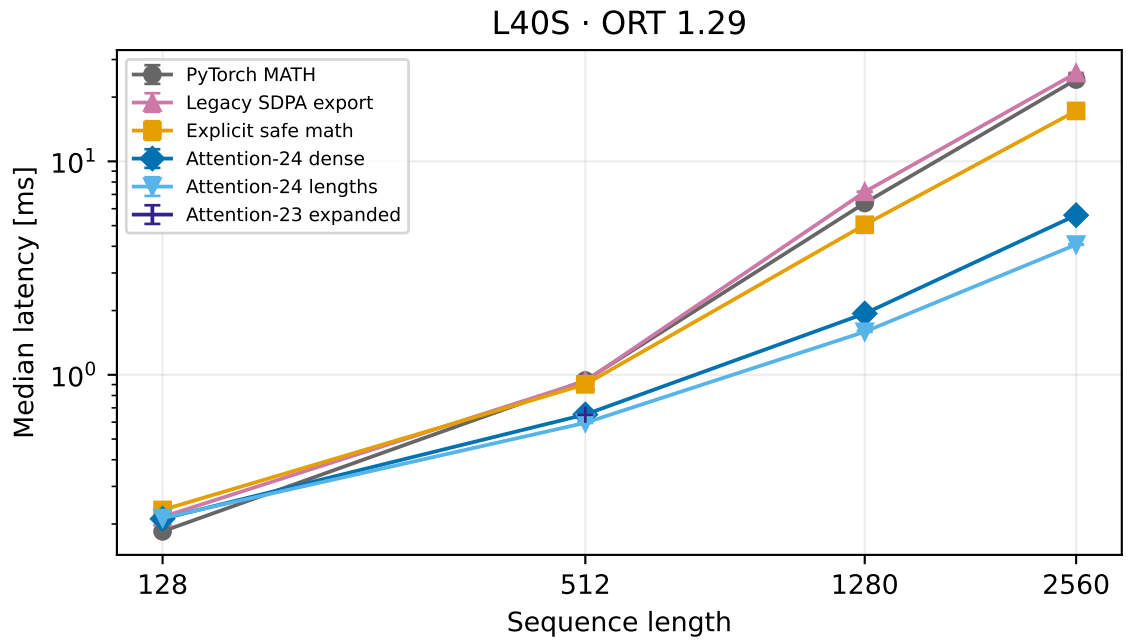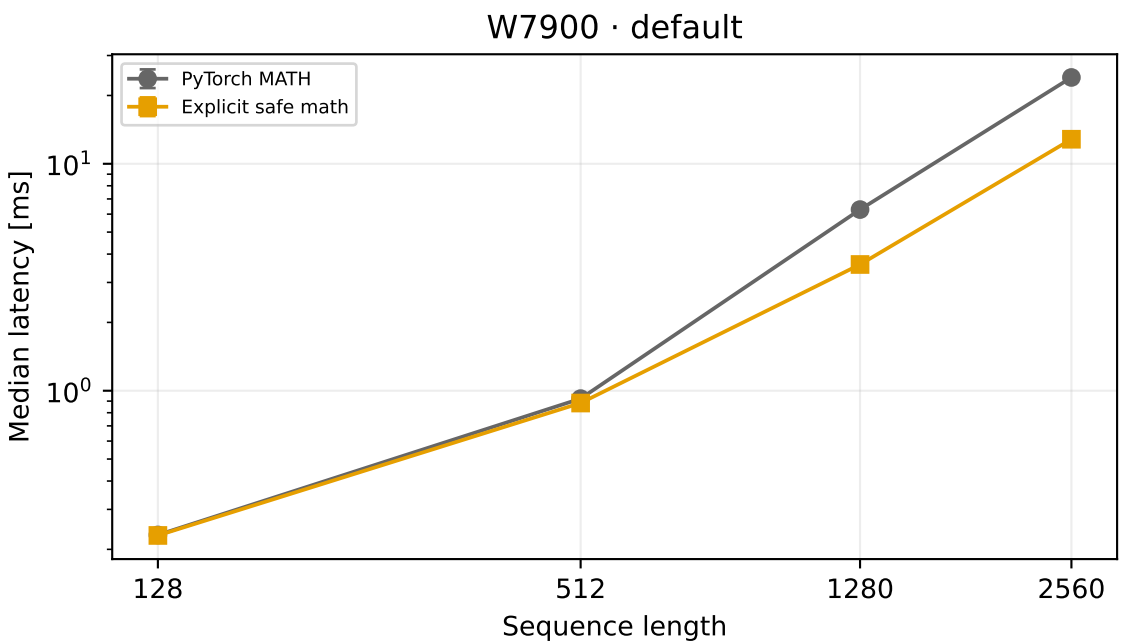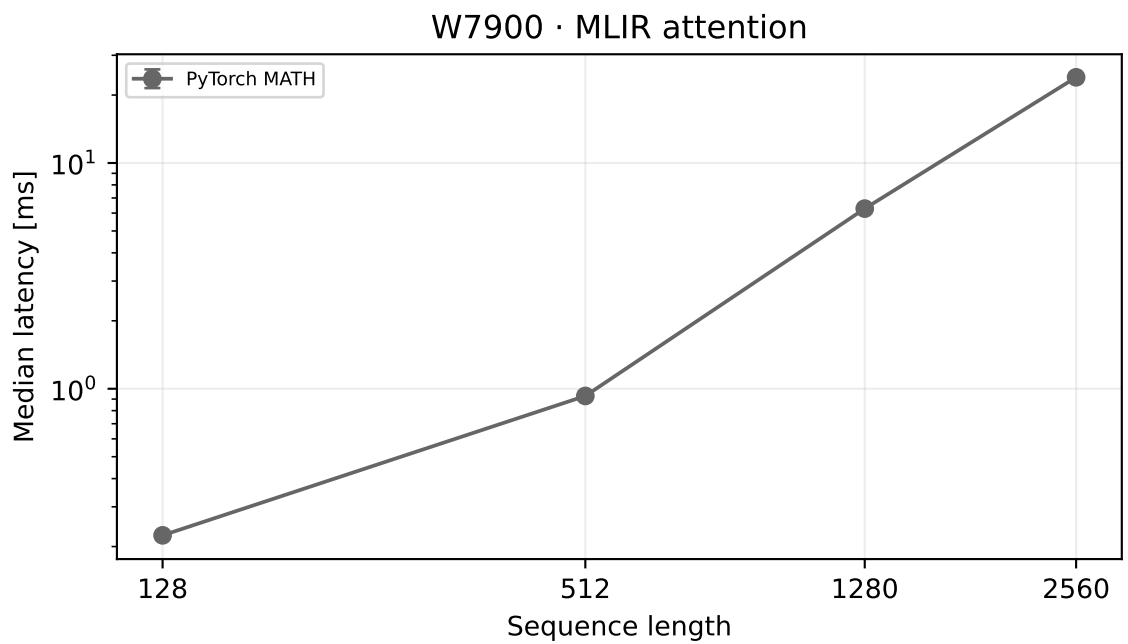FP32, padding: B=4, H=16, D=16 · ORT includes host I/O
Bars span medians of three timing trials; failed cases omitted here, retained in support matrix