LUS/MUS/HUS/HHUS/HGUS®

Face-Mount Joist Hangers

This product is preferable to similar connectors because of a) easier installation, b) higher loads, c) lower installed cost, or a combination of these features.

The double-shear hanger series, ranging from the light-capacity LUS hangers to the highest-capacity HGUS hangers, feature innovative double-shear nailing that distributes the load through two points on each joist nail for greater strength. This allows for fewer nails, faster installation and the use of all common nails for the same connection.

For medium-load truss applications, the MUS offers a lower-cost alternative and easier installation than the HUS or THA hangers, while providing greater load capacity and bearing than the LUS.

Material: See tables on pp. 220–221

Finish: Galvanized. Some products available in stainless steel or ZMAX® coating.

Installation:


- Use all specified fasteners; see General Notes
- Nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:


- LUS and MUS hangers cannot be modified
- Concealed flanges are not available for HGUS and HHUS
- Other sizes available; consult your Simpson Strong-Tie representative

Codes: See p. 12 for Code Reference Key Chart


Web Applications: Visit **app.strongtie.com/hs** to access our Hanger Selector web application.

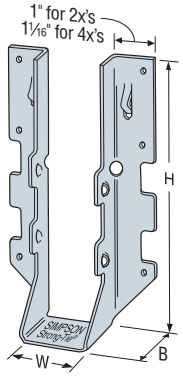


LUS28

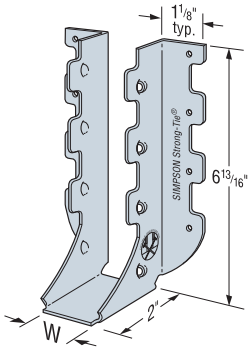


MUS28




HHUS210-2



HUS210
(HUS26, HUS28, and HHUS similar)




HGUS28-2

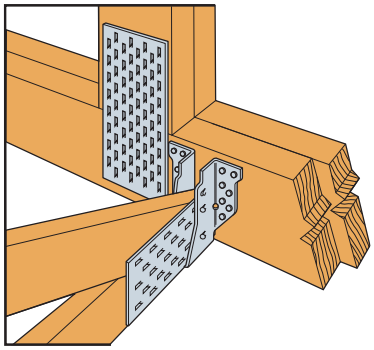


Typical HUS26 Installation with Reduced Heel Height *(multiple member fastening by designer)*



Double-Shear Nailing Top View



Double-Shear Nailing Side View Do not bend tab



Dome Double-Shear Nailing Side View *(Available on some models)*

Plated Truss Connectors

C-C-2026 © 2026 SIMPSON STRONG-TIE COMPANY INC.

LUS/MUS/HUS/HHUS/HGUS®

Face-Mount Joist Hangers (cont.)

	Model No.	Min. Heel Height	Ga.	Dimensions (in.)			Fasteners	
				W	H	B	Carrying Member	Carried Member
	Single 2x Sizes							
	LUS24	2⅝	18	1⅜₁₆	3⅛	1¾	(4) 0.148 x 3	(2) 0.148 x 3
SS	LUS26	4¼	18	1⅜₁₆	4¾	1¾	(4) 0.148 x 3	(4) 0.148 x 3
	MUS26	4¹¹⁄₁₆	18	1⅜₁₆	5³⁄₁₆	2	(6) 0.148 x 3	(6) 0.148 x 3
	HUS26	4⅝₁₆	16	1⅝	5⅜	3	(14) 0.162 x 3½	(6) 0.162 x 3½
	HGUS26	4⅝₁₆	12	1⅝	5⅜	5	(20) 0.162 x 3½	(8) 0.162 x 3½
SS	LUS28	4⅜₁₆	18	1⅜₁₆	6⅝	1¾	(6) 0.148 x 3	(4) 0.148 x 3
	MUS28	6⅝₁₆	18	1⅜₁₆	6¹³⁄₁₆	2	(8) 0.148 x 3	(8) 0.148 x 3
	HUS28	6½	16	1⅝	7	3	(22) 0.162 x 3½	(8) 0.162 x 3½
	HGUS28	6⅝₁₆	12	1⅝	7⅛	5	(36) 0.162 x 3½	(12) 0.162 x 3½
SS	LUS210	4¼	18	1⅜₁₆	7¹³⁄₁₆	1¾	(8) 0.148 x 3	(4) 0.148 x 3
	HUS210	8⅜	16	1⅝	9	3	(30) 0.162 x 3½	(10) 0.162 x 3½
	HGUS210	8⅝₁₆	12	1⅝	9⅛	5	(46) 0.162 x 3½	(16) 0.162 x 3½

1. See table below for allowable loads.

These products are available with additional corrosion protection. For more information, pp. 13–19.

SS For stainless-steel fasteners, see p. 25.

SD Many of these products are approved for installation with Strong-Drive® SD Connector screws. See pp. 380–382 for more information.

HS Hanger Selector

Visit **app.strongtie.com/hs** to access our Hanger Selector web application.

	Model No.	DF Allowable Loads					SP Allowable Loads					SPF/HF Allowable Loads					Code Ref.
		Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	
	Single 2x Sizes																
	LUS24	435	670	765	820	1,045	435	725	825	890	1,120	360	495	565	605	770	IBC, FL, LA
SS	LUS26	1,165	865	990	1,070	1,355	1,165	935	1,070	1,150	1,475	865	635	725	785	1,000	
	MUS26	930	1,295	1,480	1,560	1,560	930	1,405	1,560	1,560	1,560	810	1,110	1,265	1,370	1,570	
	HUS26	1,320	2,735	3,095	3,235	3,235	1,320	2,960	3,280	3,280	3,280	1,150	2,350	2,660	2,780	2,780	
	HGUS26	1,040	4,355	4,875	5,230	5,390	1,045	4,725	5,295	5,390	5,390	1,005	3,755	4,205	4,495	5,390	
SS	LUS28	1,165	1,100	1,260	1,350	1,725	1,165	1,195	1,360	1,465	1,730	865	810	925	1,000	1,270	
	MUS28	1,320	1,730	1,975	2,125	2,255	1,320	1,875	2,135	2,255	2,255	1,150	1,270	1,455	1,575	1,955	
	HUS28	1,760	4,095	4,095	4,095	4,095	1,760	4,095	4,095	4,095	4,095	1,480	3,520	3,520	3,520	3,520	
	HGUS28	1,650	7,275	7,275	7,275	7,275	1,650	7,275	7,275	7,275	7,275	1,485	6,010	6,255	6,255	6,255	
SS	LUS210	1,165	1,335	1,530	1,640	2,090	1,165	1,450	1,655	1,775	2,270	865	985	1,120	1,215	1,500	
	HUS210	2,635	5,450	5,795	5,830	5,830	2,635	5,395	5,780	5,830	5,830	2,220	4,685	4,985	5,015	5,015	
	HGUS210	2,090	9,100	9,100	9,100	9,100	2,090	9,100	9,100	9,100	9,100	1,545	6,340	6,730	6,730	6,730	

1. For dimensions and fastener information, see table above. See table footnotes on p. 221.

HHUS/HGUS

See Hanger Options information on pp. 107–109.


HHUS — Sloped and/or Skewed Seat

- HHUS hangers can be skewed to a maximum of 45° and/or sloped to a maximum of 45°
- For skew only, maximum allowable download is 0.85 of the table load
- For sloped only or sloped and skewed hangers, the maximum allowable download is 0.65 of the table load
- Uplift loads for sloped/skewed conditions are 0.72 of the table load, not to exceed 2,475 lb.
- The joist must be bevel-cut to allow for double shear nailing

HGUS — Skewed Seat

- HGUS hangers can be skewed to a maximum of 45°. Allowable load adjustment factors are:

HGUS Seat Width	Carried Member End Condition			
	Square Cut		Bevel Cut	
	Uplift	Download	Uplift	Download
W < 2"	0.46	0.62	0.46	0.72
2" < W < 6"	0.41	0.46	0.41	0.85
6" < W < 6.75"		0.40		
6.75" < W < 7.25"	Not allowed	Not allowed		

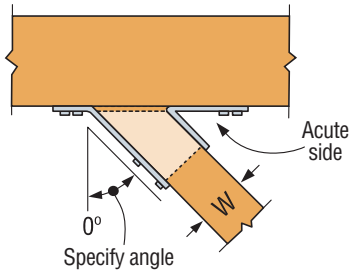

Top View HHUS Hanger Skewed Right
(joist must be bevel cut)
All joist nails installed on the outside angle *(non-acute side)*.

C-C-2026 ©2026 SIMPSON STRONG-TIE COMPANY INC.

LUS/MUS/HUS/HHUS/HGUS®

These products are available with additional corrosion protection. For more information, see pp. 13–19.

SS For stainless-steel fasteners, see p. 25.

SD Many of these products are approved for installation with Strong-Drive® SD Connector screws. See pp. 380–382 for more information.

Model No.	Min. Heel Height	Ga.	Dimensions (in.)			Fasteners (in.)		DF/SP Allowable Loads					SPF/HF Allowable Loads					Code Ref.
			W	H	B	Carrying Member	Carried Member	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	
Double 2x Sizes																		
LUS24-2	2¼	18	3⅛	3⅛	2	(4) 0.162 x 3½	(2) 0.162 x 3½	410	800	905	980	1,245	355	690	780	845	1,070	IBC, FL, LA
LUS26-2	4⁹⁄₁₆	18	3⅛	4⅞	2	(4) 0.162 x 3½	(4) 0.162 x 3½	1,060	1,030	1,170	1,265	1,595	910	885	1,005	1,090	1,370	
HHUS26-2	4⁵⁄₁₆	14	3⁹⁄₁₆	5⅜	3	(14) 0.162 x 3½	(6) 0.162 x 3½	1,320	2,830	3,190	3,415	4,250	1,135	2,435	2,745	2,935	3,655	
HGUS26-2	4⁹⁄₁₆	12	3⁹⁄₁₆	5⁷⁄₁₆	4	(20) 0.162 x 3½	(8) 0.162 x 3½	2,155	4,355	4,875	5,230	5,575	2,155	3,755	4,875	5,230	5,255	
LUS28-2	4⁹⁄₁₆	18	3⅛	7	2	(6) 0.162 x 3½	(4) 0.162 x 3½	1,060	1,315	1,490	1,610	2,030	910	1,130	1,280	1,385	1,745	
HHUS28-2	6⁹⁄₁₆	14	3⁹⁄₁₆	7¼	3	(22) 0.162 x 3½	(8) 0.162 x 3½	1,760	4,265	4,810	5,155	5,980	1,515	3,670	4,135	4,435	5,145	
HGUS28-2	6⁹⁄₁₆	12	3⁹⁄₁₆	7⁹⁄₁₆	4	(36) 0.162 x 3½	(12) 0.162 x 3½	3,235	7,460	7,460	7,460	7,460	2,780	6,415	6,415	6,415	6,415	
LUS210-2	6⁷⁄₁₆	18	3⅛	9	2	(8) 0.162 x 3½	(6) 0.162 x 3½	1,445	1,830	2,075	2,245	2,830	1,245	1,575	1,785	1,930	2,435	
HHUS210-2	8⅜	14	3⁹⁄₁₆	9³⁄₁₆	3	(30) 0.162 x 3½	(10) 0.162 x 3½	3,550	5,705	6,435	6,485	6,485	3,335	4,905	5,340	5,060	5,190	
HGUS210-2	8⁹⁄₁₆	12	3⁹⁄₁₆	9³⁄₁₆	4	(46) 0.162 x 3½	(16) 0.162 x 3½	4,095	9,100	9,100	9,100	9,100	3,520	7,460	7,825	7,825	7,825	
Triple 2x Sizes																		
HGUS26-3	4¹³⁄₁₆	12	4¹⁵⁄₁₆	5½	4	(20) 0.162 x 3½	(8) 0.162 x 3½	2,155	4,355	4,875	5,230	5,575	2,155	3,755	4,875	5,230	5,255	IBC, FL, LA
HGUS28-3	6¹³⁄₁₆	12	4¹⁵⁄₁₆	7¼	4	(36) 0.162 x 3½	(12) 0.162 x 3½	3,235	7,460	7,460	7,460	7,460	2,780	6,415	6,415	6,415	6,415	
HHUS210-3	8⅜	14	4¹¹⁄₁₆	8⅞	3	(30) 0.162 x 3½	(10) 0.162 x 3½	3,405	5,640	6,380	6,485	6,485	2,930	4,850	5,485	5,575	5,575	FL
HGUS210-3	8¹³⁄₁₆	12	4¹⁵⁄₁₆	9¼	4	(46) 0.162 x 3½	(16) 0.162 x 3½	4,095	9,100	9,100	9,100	9,100	3,520	7,825	7,825	7,825	7,825	IBC, FL, LA
HGUS212-3	10⅝	12	4¹⁵⁄₁₆	10¾	4	(56) 0.162 x 3½	(20) 0.162 x 3½	5,205	11,915	13,330	14,290	14,350	4,730	10,280	12,420	12,420	12,420	
HGUS214-3	12⅝	12	4¹⁵⁄₁₆	12¾	4	(66) 0.162 x 3½	(22) 0.162 x 3½	5,360	13,860	14,350	14,350	14,350	4,915	11,960	12,420	12,420	12,420	
Quadruple 2x Sizes																		
HGUS26-4	5½	12	6⁹⁄₁₆	5⁷⁄₁₆	4	(20) 0.162 x 3½	8) 0.162 x 3½	2,155	4,355	4,875	5,230	5,575	2,155	3,755	4,875	5,230	5,255	IBC, FL, LA
HGUS28-4	7¼	12	6⁹⁄₁₆	7⁹⁄₁₆	4	(36) 0.162 x 3½	(12) 0.162 x 3½	3,235	7,460	7,460	7,460	7,460	2,780	6,415	6,415	6,415	6,415	
HHUS210-4	8⅜	14	6⅛	8⅞	3	(30) 0.162 x 3½	(10) 0.162 x 3½	3,405	5,640	6,380	6,485	6,485	2,930	4,850	5,485	5,575	5,575	FL
HGUS210-4	9¼	12	6⁹⁄₁₆	9³⁄₁₆	4	(46) 0.162 x 3½	(16) 0.162 x 3½	4,095	9,100	9,100	9,100	9,100	3,520	7,825	7,825	7,825	7,825	IBC, FL, LA
HGUS212-4	10⅝	12	6⁹⁄₁₆	10⅝	4	(56) 0.162 x 3½	(20) 0.162 x 3½	5,205	11,915	13,330	14,290	14,350	4,730	10,280	12,420	12,420	12,420	
HGUS214-4	12⅝	12	6⁹⁄₁₆	12⅝	4	(66) 0.162 x 3½	(22) 0.162 x 3½	5,360	13,860	14,350	14,350	14,350	4,915	11,960	12,420	12,420	12,420	
4x Sizes																		
LUS46	4⅜	18	3⁹⁄₁₆	4¾	2	(4) 0.162 x 3½	(4) 0.162 x 3½	1,060	1,030	1,170	1,265	1,595	910	885	1,005	1,090	1,370	IBC, FL, LA
HGUS46	4⅞	12	3⅝	5⁵⁄₁₆	4	(20) 0.162 x 3½	(8) 0.162 x 3½	2,155	4,355	4,875	5,230	5,575	2,155	3,755	4,875	5,230	5,255	
HHUS46	4⁵⁄₁₆	14	3⅝	5⁹⁄₁₆	3	(14) 0.162 x 3½	(6) 0.162 x 3½	1,320	2,830	3,190	3,415	4,250	1,135	2,435	2,745	2,935	3,655	
LUS48	4⅜	18	3⁹⁄₁₆	6¾	2	(6) 0.162 x 3½	(4) 0.162 x 3½	1,060	1,315	1,490	1,610	2,030	910	1,130	1,280	1,385	1,745	
HUS48	6¹⁵⁄₁₆	14	3⁹⁄₁₆	7	2	(6) 0.162 x 3½	(6) 0.162 x 3½	1,320	1,630	1,840	1,980	2,465	1,135	1,360	1,540	1,660	2,075	
HHUS48	6½	14	3⅝	7⅛	3	(22) 0.162 x 3½	(8) 0.162 x 3½	1,760	4,265	4,810	5,155	5,980	1,515	3,670	4,135	4,435	5,145	
HGUS48	6⁷⁄₁₆	12	3⅝	7¹⁄₁₆	4	(36) 0.162 x 3½	(12) 0.162 x 3½	3,235	7,460	7,460	7,460	7,460	2,780	6,415	6,415	6,415	6,415	
LUS410	6¼	18	3⁹⁄₁₆	8¾	2	(8) 0.162 x 3½	(6) 0.162 x 3½	1,445	1,830	2,075	2,245	2,830	1,245	1,575	1,785	1,930	2,435	
HHUS410	8⅜	14	3⅝	9	3	(30) 0.162 x 3½	(10) 0.162 x 3½	3,550	5,705	6,435	6,485	6,485	3,265	4,905	5,535	5,575	5,575	
HGUS410	8⁷⁄₁₆	12	3⅝	9¹⁄₁₆	4	(46) 0.162 x 3½	(16) 0.162 x 3½	4,095	9,100	9,100	9,100	9,100	3,520	7,825	7,825	7,825	7,825	
HGUS412	10⁷⁄₁₆	12	3⅝	10⁷⁄₁₆	4	(56) 0.162 x 3½	(20) 0.162 x 3½	5,205	11,915	13,330	14,290	14,350	4,730	10,280	12,420	12,420	12,420	
HGUS414	11⁷⁄₁₆	12	3⅝	12⁷⁄₁₆	4	(66) 0.162 x 3½	(22) 0.162 x 3½	5,360	13,860	14,350	14,350	14,350	4,915	11,960	12,420	12,420	12,420	
Double 4x Sizes																		
HGUS7.37/10	8⁷⁄₁₆	12	7⅜	8⁹⁄₁₆	4	(46) 0.162 x 3½	(16) 0.162 x 3½	4,095	9,100	9,100	9,100	9,100	3,520	7,825	7,825	7,825	7,825	IBC, FL, LA
HGUS7.37/12	10⁷⁄₁₆	12	7⅜	10⁹⁄₁₆	4	(56) 0.162 x 3½	(20) 0.162 x 3½	5,205	11,915	13,330	14,290	14,350	4,730	10,280	12,420	12,420	12,420	
HGUS7.37/14	11⁷⁄₁₆	12	7⅜	12⁹⁄₁₆	4	(66) 0.162 x 3½	(22) 0.162 x 3½	5,360	13,860	14,350	14,350	14,350	4,915	11,960	12,420	12,420	12,420	

1. Uplift loads have been increased for earthquake or wind loading with no further increase allowed. Reduce where other loads govern.
2. Wind (160) is a download rating.
3. Minimum heel height shown is required to achieve full table loads. For less than minimum heel height, see technical bulletin T-C-REDHEEL at **strongtie.com**.
4. Truss chord cross-grain tension may limit allowable loads in accordance with ANSI/TPI 1-2014. The Simpson Strong-Tie Hanger Selector web application includes the evaluation of cross-grain tension in its hanger allowable loads. For additional information, contact Simpson Strong-Tie.
5. Loads shown are based on a two-ply 2x carrying member minimum for nailed hangers. With 3x carrying members: when 0.162" x 3½" nails are specified, use 0.162" x 2½" nails into the header and 0.162" x 3½" nails into the joist with no load reduction. When 0.148" x 3" nails are specified, use 0.148" x 2½" nails into the header and 0.148" x 3" nails into the joist with no load reduction. With 2x carrying members: when 0.162" x 3½" nails are specified, use 0.148" x 1½" nails into the header and 0.148" x 3" nails into the joist and reduce the load to 0.64 of the table values. When 0.148" x 3" nails are specified, use 0.148" x 1½" nails into the header and 0.148" x 3" nails into the joist and reduce the load to 0.77 of the table values.
6. **Fasteners:** Nail dimensions are listed diameter by length. See pp. 25–26 for fastener information.

C-C-2026 ©2026 SIMPSON STRONG-TIE COMPANY INC.