Framing Angles and Plates

The larger LTP5 spans subfloor at the top of the blocking or rim board. The embossments enhance performance.

The LTP4 lateral tie plate transfers shear forces for top plate-to-rim board or blocking connections. Nail holes are spaced to prevent wood splitting for single and double top-plate applications. May be installed over plywood sheathing.

The A35 angle's exclusive bending slot allows instant, accurate field bends for all two- and three-way ties. Balanced, completely reversible design permits the A35 to secure a great variety of connections.

Material: LTP4/LTP5 — 20 gauge; all others — 18 gauge


Finish: Galvanized. Some products available in stainless steel or ZMAX® coating.


Installation:

- Use all specified fasteners; see General Notes
- A35 — Bend one time only


Codes: See p. 12 for Code Reference Key Chart

Web Applications:
Visit **app.strongtie.com/rws** to access our Roof-to-Wall Selector web application.

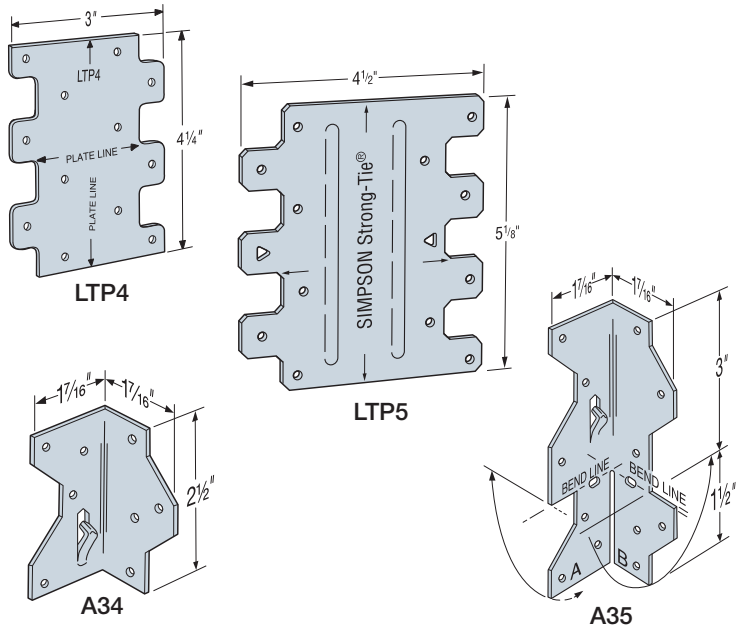





Joists to Plate with A Leg Inside




Studs to Plate with B Leg Outside




Joists to Beams




Ceiling Joists to Beam




1 A34

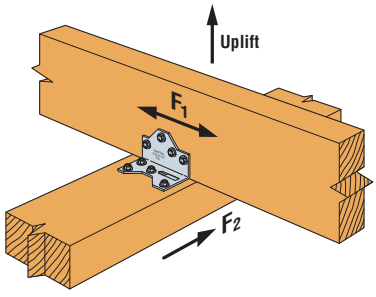


1 A34 Installed with SD Screws




2 A35




3 A35




4 A35



4 A35



5 A35

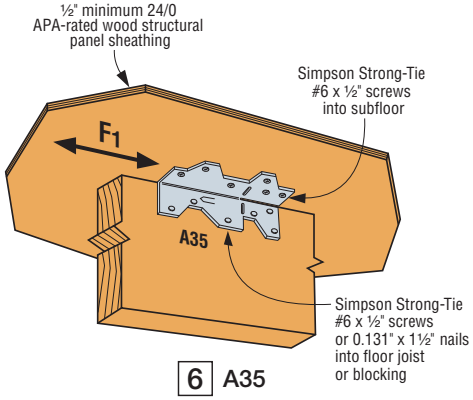

6 A35

C-C-2026 ©2026 SIMPSON STRONG-TIE COMPANY INC.

Framing Angles and Plates (cont.)


These products are available with additional corrosion protection. For more information, see pp. 13–19.

SS For stainless-steel fasteners, see p. 25.


SD Many of these products are approved for installation with Strong-Drive® SD Connector screws. See pp. 380–382 for more information.

	Model No.	Configuration Type of Connection	Fasteners (in.)	Direction of Load	DF/SP Allowable Loads			SPF/HF Allowable Loads			Code Ref.
					Floor (100)	Roof (125)	(160)	Floor (100)	Roof (125)	(160)	
SS	A34	1	(8) 0.131 x 1½	F_1	395	480	545	340	415	480	IBC, FL, LA
SS	A34	1	(8) 0.131 x 1½	F_2[6]	395	430	430	340	370	370	IBC, FL, LA
SS	A34	1	(8) #9 x 1½" SD	F_1	640	640	640	550	550	550	IBC, FL, LA
SS	A34	1	(8) #9 x 1½" SD	F_2[6]	495	495	495	425	425	425	IBC, FL, LA
SS	A34	1	(8) #9 x 1½" SD	Uplift	240	240	240	170	170	170	—
SS	A35	2	(9) 0.131 x 1½	A_1	295	350	350	255	300	300	IBC, FL, LA
SS	A35	2	(9) 0.131 x 1½	E	295	360	385	255	310	330	IBC, FL, LA
SS	A35	2	(9) 0.131 x 1½	C_1	185	185	185	160	160	160	IBC, FL, LA
SS	A35	3	(12) 0.131 x 1½	A_2	295	325	325	255	280	280	IBC, FL, LA
SS	A35	3	(12) 0.131 x 1½	C_2	295	330	330	255	285	285	IBC, FL, LA
SS	A35	3	(12) 0.131 x 1½	D	225	225	225	195	195	195	IBC, FL, LA
SS	A35	4	(12) 0.131 x 1½	F_1	590	650	650	510	560	560	IBC, FL, LA
SS	A35	4	(12) 0.131 x 1½	F_2[6]	590	670	670	510	575	575	IBC, FL, LA
SS	A35	5	(12) 0.131 x 1½	F_1	555	555	555	475	475	475	IBC, FL, LA
SS	A35	6	(12) PH612I	F_1	420	420	420	360	360	360	—
	LTP4	7	(12) 0.131 x 1½	G	580	715	715	500	615	615	IBC, FL, LA
	LTP4	7	(12) 0.131 x 1½	H	525	525	525	450	450	450	IBC, FL, LA
	LTP4	7	(12) #9 x 1½" SD	G	910	910	910	670	780	780	IBC, FL, LA
	LTP4	7	(12) #9 x 1½" SD	H	800	800	800	670	690	690	IBC, FL, LA
	LTP5	8	(12) 0.131 x 1½	G	565	565	565	485	485	485	IBC, FL, LA
	LTP5	8	(12) 0.131 x 1½	H	465	465	465	400	400	400	IBC, FL, LA
	LTP5	8	(12) #9 x 1½" SD	G	800	800	800	670	685	685	—
	LTP5	8	(12) #9 x 1½" SD	H	730	730	730	625	625	625	—

1. Allowable loads are for one angle. When angles are installed on each side of the joist, the minimum joist thickness is 3".
2. Some illustrations show connections that could cause cross-grain tension or bending of the wood during loading if not reinforced sufficiently. In this case, mechanical reinforcement should be considered.
3. LTP4 and LTP5 can be installed over ⅜" wood structural panel sheathing with tabulated fasteners and achieve 0.72 of the listed load, or over ½" sheathing and achieve 0.64 of the listed load. 0.131" x 2½" nails or #9 x 2½" SD screws will achieve full load in both applications.
4. LTP4 satisfies the IRC continuously sheathed portal frame (CS-PF) framing anchor requirements when installed over raised wood floor framing per Figure R602.10.6.4.
5. Connectors are required on both sides to achieve F_2 loads in both directions.
6. A34 and A35 installed with 0.131" x 1½" nails onto 1¼" LSL material will achieve 0.90 of the listed F_1 and F_2 loads.
7. **Fasteners:** Nail dimensions are listed diameter by length. SD screws are Simpson Strong-Tie Strong-Drive SD Connector screws. PH612I is a pan-head #6 x ½" screw available from Simpson Strong-Tie. See pp. 25–26 for other nail sizes and information.

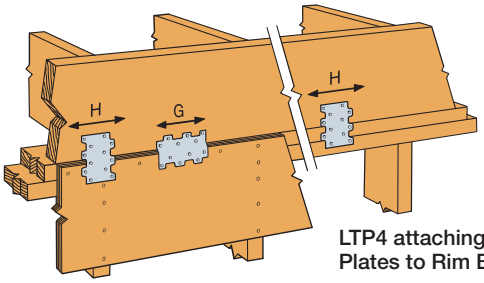


LTP4 attaching Top Plates to Rim Board

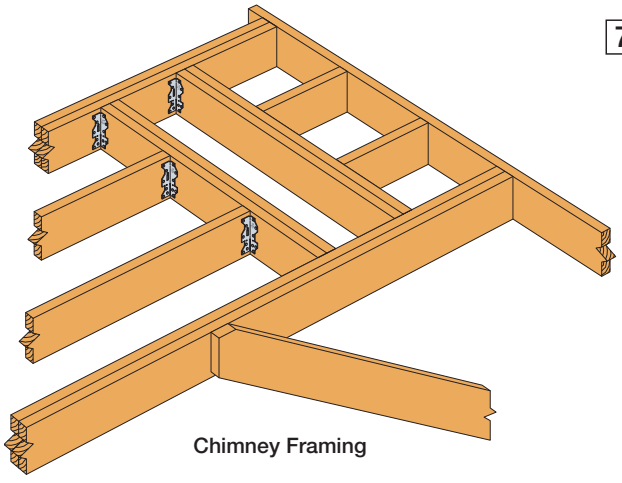

Chimney Framing

7 LTP4 Installed over Wood Structural Panel Sheathing

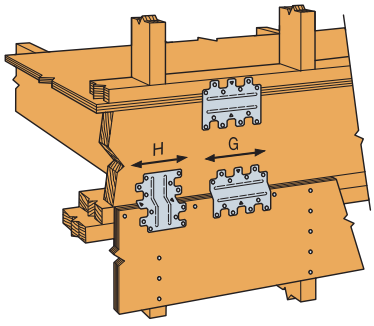

8 LTP5 Installed over Wood Structural Panel Sheathing or Attaching Plate to Rim Board

C-C-2026 © 2026 SIMPSON STRONG-TIE COMPANY INC.