

The SPWF01Sx – dynamic web pages

Introduction

This application note describes how to create a dynamic web page using the SSI tags and integrated CGIs.

The SPWF01Sx module offers a set of tags and CGI pages which allow users to build dynamic web pages and interact with them.

Starting from a "dynamic DEMO website", this AN shows how to create every web page containing one or more SSI tags.

The HTML source code, used in this document, is provided and can be freely used to build a custom web site.

This investigation is aligned with the FW 3.6 (version SPWF0xS-180621-5f9a5a0).



1 Overview

1.1 Current CGIs (hardcoded in the module)

- output.cgi: can be used to push data over the module's UART
- firstset.cgi: can be used to perform the first configuration of the module
- remote.cgi: can be used to perform AT commands remotely (only GPIO control currently supported)
- input.cgi: can be used together with input SSI

1.2 Current SSIs (hardcoded in the module)

- · devsts SSI: user can get module's status variables including this SSI into HTML pages
- · devconf SSI: user can get module's configuration variables including this SSI into HTML pages
- peers SSI: user can get module's peers table including this SSI into HTML pages
- input SSI: user can get strings from HOST including this SSI into HTML pages
- message SSI: used for error message through HTML pages. This SSI can be ignored

Notes regarding SSI tags:

- Whitespace is allowed between the tag lead-in "<!--#" and the start of the tag name, and between the tag name and the lead-out string "-->".
- HTML file extensions that can correctly run the SSIs: .shtml, .shtm, .ssi or .xml.

1.3 CGI vs. SSI

CGI is a source code executed on demand, while SSI is an HTML replacement. These can be used at the same time. For example, in the input_demo.html, the input CGI and input SSI are both used. The first asks the HOST to provide a message for the client, while the second replaces the HTML comment (SSI) with the message provided by the HOST.

1.3.1 CGI and SSI enable/disable

The CGIs and SSIs integrated in the webserver can be enabled/disabled by acting on the ip_use_cgis and ip use ssis variables. By default, both variables are set to 0x0000000F (all enabled).

The CGIs and SSIs can be set as shown below:

- OUTPUT CGI BIT=0
- INPUT CGI BIT=1
- REMOTE CGI BIT=2
- FIRSTSET CGI BIT=3
- STATUS SSI BIT=0
- CONFIG SSI BIT=1
- PEERS SSI BIT=2
- INPUT_SSI_BIT=3

AN4902 - Rev 2 page 2/49



2 Dynamic website

The following subsections explain, in detail, how to use the SSIs and CGIs.

An outfile.img file (containing the HTML files and images) is provided and can be uploaded to the module's external Flash memory using the AT+S.HTTPDFSUPDATE command.

2.1 Index page – index.html

Figure 1. Index page



2.1.1 HTML code

```
<hre><html>
<head>
<title>SPWF01S WIFI MODULE</title>
</head>
<frameset cols="23%,*%" frameborder="0" framespacing="0" border="0">

<frame name="menu" src="menu.html" scrolling="auto" framespacing="0">

<frameset rows="150, 650">

<frame name="ST" src="your_banner.html" scrolling="auto" framespacing="0">

">
```

AN4902 - Rev 2 page 3/49



2.1.2 HTML code description

The index page is composed of 3 frames. The HTML frames allows users to present documents in multiple views, which may be independent windows or sub-windows. Multiple views offer users a way to keep certain information visible while other views are scrolled or replaced.

On the DEMO page, within the same window, one frame displays a static banner; a second window displays a navigation menu and a third displays the main document, which can be scrolled through or replaced by navigating in the second frame.

In detail:

the 1st frame is named "menu" and displays menu.html page

```
<frame name="menu" src="menu.html" scrolling="auto" framespacing="0">
```

the 2nd frame is named "ST" and displays your_banner.html page

```
<frame name="ST" src="your_banner.html" scrolling="auto" framespacing="0">
```

3rd frame is named "homepage" and displays home.html page

```
<frame name="homepage" src="home.html" scrolling="auto" framespacing="0">
```

2.2 Your banner frame – your_banner.html

Figure 2. Dynamic web page customization page



AN4902 - Rev 2 page 4/49



2.2.1 HTML code

<html>
<body bgcolor="#F2F2F2">

<img src="st766.gif" ALIG
N=right BORDER=0 TITLE="SPWF01Sx official website" ATL=TITLE="SPWF01Sx official website" VSPACE=5 HSPACE=5></a

</body>
</html>

2.2.2 HTML code description


In the banner frame, the user can include a custom image and a target web site. The image can be stored in the external Flash of the module as the HTML pages.

In detail:

- The code <a href="http://www.st.com/wifimodules" is used to link a web site.
- The code <img src="st766.gif" is used to link a custom image.

2.3 Menu frame – menu.html

Figure 3. Menu frame

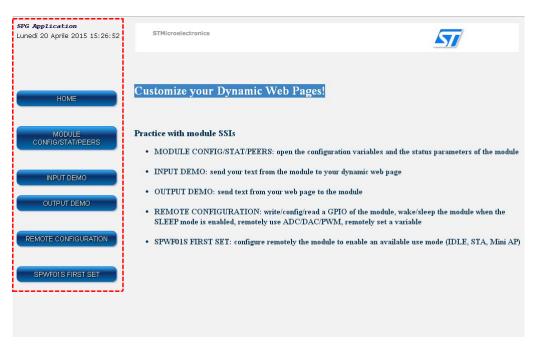

AN4902 - Rev 2 page 5/49



2.3.1 HTML code

```
<!DOCTYPE html>
<html>
<head>
</head>
<body bgcolor="#F2F2F2">
<span style="background-color: #f3f3f3;"><span style="color: #20124d;"><i><b><span</pre>
 style="font-size: small;"><span style="font-family: &quot;Courier New&quot;,Couri</pre>
er, monospace; ">SPG Application
</span></span></b></i></span></span>
<br>
<script language="JavaScript1.2">
function digitalclock(){
var data =new Date()
mese = data.getMonth();
giorno =data.getDay();
anno = data.getFullYear();
date = data.getDate();
ora = data.getHours();
minuti=data.getMinutes();
secondi=data.getSeconds();
if(giorno == 0)giorno = "Domenica";
```

AN4902 - Rev 2 page 6/49



```
if(giorno == 1)giorno = "Luned\i";
if(giorno == 2)giorno = "Marted\i";
if(giorno == 3)giorno = "Mercoled\i";
if(giorno == 4)giorno = "Gioved\i";
if(giorno == 5)giorno = "Venerd\i";
if(giorno == 6)giorno = "Sabato";
if (mese == 0) mese = "Gennaio";
if(mese ==1)mese = "Febbraio";
if (mese ==2) mese = "Marzo";
if (mese ==3) mese = "Aprile";
if (mese ==4) mese = "Maggio";
if (mese ==5) mese = "Giugno";
if (mese ==6) mese = "Luglio";
if (mese ==7) mese = "Agosto";
if (mese ==8) mese = "Settembre";
if (mese ==9) mese = "Ottobre";
if (mese ==10) mese = "Novembre";
if (mese ==11) mese = "Dicembre";
if (ora <=9) ora="0"+ora;
if (minuti<=9) minuti="0"+minuti;</pre>
if (secondi<=9) secondi="0"+secondi;</pre>
data="<font size='2' face='Verdana'>"+giorno+" "+date+" "+mese+" "+anno+" "+ora+":
"+minuti+":"+secondi+"</font>"
if (document.all)
```

AN4902 - Rev 2 page 7/49



```
document.all.clock.innerHTML=data;
else if (document.getElementById)
document.getElementById("clock").innerHTML=data;
else
document.write(data)
if (!document.all&&!document.getElementById)
digitalclock()
function loadtime(){
if (document.all||document.getElementById)
setInterval("digitalclock()",1000)
onload=loadtime
// -->
</script>
</head>
<body>
<span id="clock"></span>
<body>
<a href="/home.html" target="homepage"><button style="</pre>
width: 15em;
padding: .5em;
```

AN4902 - Rev 2 page 8/49



```
color: #ffffff;
text-shadow: 1px 1px 1px #000000;
border: solid thin #1c58ce;
-webkit-border-radius: .7em;
-moz-border-radius: .7em;
border-radius: .7em;
-webkit-box-shadow: 2px 2px 3px #999999;
box-shadow: 2px 2px 2px #bbbbbb;
background-color: #1c58ce;
background-image: -webkit-gradient(linear, left top, left bottom,
from(\#2bb4ff), to(\#0070ad),color-stop(0.4, \#102d65));">HOME</button></a>
</body>
<br><br><br><br>>
<body>
<a href="/configuration.html" target="homepage"><button style="</pre>
width: 15em;
padding: .5em;
color: #ffffff;
text-shadow: 1px 1px 1px #000000;
border: solid thin #1c58ce;
-webkit-border-radius: .7em;
-moz-border-radius: .7em;
border-radius: .7em;
```

AN4902 - Rev 2 page 9/49



```
-webkit-box-shadow: 2px 2px 3px #999999;
box-shadow: 2px 2px 4bbbbbb;
background-color: #1c58ce;
background-image: -webkit-gradient(linear, left top, left bottom,
from(#2bb4ff), to(#0070ad),color-stop(0.4, #102d65));">MODULE CONFIG/STAT/PEERS</br/>/b
utton></a>
</body>
<br><br><br><br>>
<body>
<a href="/input_demo.shtml" target="homepage"><button style="</pre>
width: 15em;
padding: .5em;
color: #ffffff;
text-shadow: 1px 1px 1px #000000;
border: solid thin #1c58ce;
-webkit-border-radius: .7em;
-moz-border-radius: .7em;
border-radius: .7em;
-webkit-box-shadow: 2px 2px 3px #999999;
box-shadow: 2px 2px 2px #bbbbbb;
background-color: #1c58ce;
background-image: -webkit-gradient(linear, left top, left bottom,
\label{lem:color-stop} \texttt{from(\#2bb4ff), to(\#0070ad),color-stop(0.4, \#102d65));"} \texttt{INPUT DEMO</button></a>
```

AN4902 - Rev 2 page 10/49



```
</body>
<br><br><br>>
<body>
<a href="/output_demo.html" target="homepage"><button style="</pre>
width: 15em;
padding: .5em;
color: #ffffff;
text-shadow: 1px 1px 1px #000000;
border: solid thin #1c58ce;
-webkit-border-radius: .7em;
-moz-border-radius: .7em;
border-radius: .7em;
-webkit-box-shadow: 2px 2px 3px #999999;
box-shadow: 2px 2px 2px #bbbbbb;
background-color: #1c58ce;
background-image: -webkit-gradient(linear, left top, left bottom,
from(#2bb4ff), to(#0070ad),color-stop(0.4, #102d65));">OUTPUT DEMO</button></a>
</body>
<br><br><br><br>>
<body>
<a href="/remote.html" target="homepage"><button style="  
width: 15em;
```

AN4902 - Rev 2 page 11/49



```
padding: .5em;
 color: #ffffff;
 text-shadow: 1px 1px 1px #000000;
border: solid thin #1c58ce;
  -webkit-border-radius: .7em;
  -moz-border-radius: .7em;
border-radius: .7em;
  -webkit-box-shadow: 2px 2px 3px #999999;
box-shadow: 2px 2px 2px #bbbbbb;
background-color: #1c58ce;
background-image: -webkit-gradient(linear, left top, left bottom,
  \texttt{from} \, (\texttt{\#2bb4ff}) \,, \, \, \texttt{to} \, (\texttt{\#0070ad}) \,, \\ \texttt{color-stop} \, (\texttt{0.4}, \,\, \texttt{\#102d65})) \,; \texttt{"} > \, \texttt{REMOTE} \,\, \texttt{CONFIGURATION} < / \, \texttt{butt} \,\, \texttt{butt} \,\, \texttt{configuration} < / \, \texttt{butt} \,\, \texttt{configuration} < / \, \texttt{butt} \,\, \texttt{configuration} < / \, \texttt{configuration
 on></a>
 </body>
<br><br><br><br>>
 <body>
<a href="/firstset.html" target="homepage"><button style="</pre>
width: 15em;
padding: .5em;
color: #ffffff;
text-shadow: 1px 1px 1px #000000;
border: solid thin #1c58ce;
 -webkit-border-radius: .7em;
  -moz-border-radius: .7em;
```

AN4902 - Rev 2 page 12/49



```
border-radius: .7em;

-webkit-box-shadow: 2px 2px 3px #999999;

box-shadow: 2px 2px 2px #bbbbbb;

background-color: #1c58ce;

background-image: -webkit-gradient(linear, left top, left bottom,

from(#2bb4ff), to(#0070ad),color-stop(0.4, #102d65));">SPWF01S FIRST SET</button></a>
</body>
</html>
```

2.3.2 HTML code description

The Menu frame is divided into two sections. The first displays a sample digital clock and date (marked in blue). A second displays six HTML5 buttons that cover all the HTML sub-pages.

To correctly perform the DEMO, it is recommended to use a browser that is compatible with the HTML5 standard (i.e. Google Chrome). The HTML5 buttons can be replaced with basic buttons if full HTML compatibility is required.

One of the HTML5 buttons is shown below, in detail:

```
<body>
<a href="/home.html" target="homepage"><button style="
width: 15em;

padding: .5em;

color: #ffffff;

text-shadow: 1px 1px 1px #000000;

border: solid thin #1c58ce;

-webkit-border-radius: .7em;
-moz-border-radius: .7em;

border-radius: .7em;

-webkit-box-shadow: 2px 2px 3px #999999;

box-shadow: 2px 2px 2px #bbbbbb;</pre>
```

AN4902 - Rev 2 page 13/49



```
background-color: #1c58ce;
background-image: -webkit-gradient(linear, left top, left bottom,
from(#2bb4ff), to(#0070ad),color-stop(0.4, #102d65));">HOME</button></a>
</body>
```

The code can be used to open a web page in a target frame. This code allows users to open the home.html page in the main frame.

2.4 HOME page (main frame) – home.html

Figure 4. Home page - main frame



2.4.1 HTML code

<html></html>
<head></head>
<title>HOME</title>
Vereite, norm // erere.
<pre><body bgcolor="#F2F2F2"></body></pre>
<pre>Customize vour Dynamic Web Pages! br></pre>

AN4902 - Rev 2 page 14/49



<span style="font
-size: large;">Practice with module SSIs</br>

<span style="font
-size: medium;">MODULE CONFIG/STAT/PEERS: open the configuration variables
and the status parameters of the module
InPUT DEMO: send your text fro
m the module to your dynamic web page
OUTPUT DEMO: send text from your
web page to the module
REMOTE CONFIGURATION: write/config/read a GPIO o
f the module, wake/sleep the module when the SLEEP mode is enabled, remotely use A
DC/DAC/PWM, remotely set a variable
STRST SET: configure remote
ly the module to enable an available use mode (IDLE, STA, Mini AP)

</html>

2.4.2 HTML code description


The HOME frame performs two functions:

- displays the home.html page when index.html is requested
- displays the HTML page when a button is clicked

The home.html page (included in the package) describes the content of this DEMO and can be freely modified.

2.5 MODULE CONFIG/STAT/PEERS PAGE – configuration.html

Figure 5. Configuration page

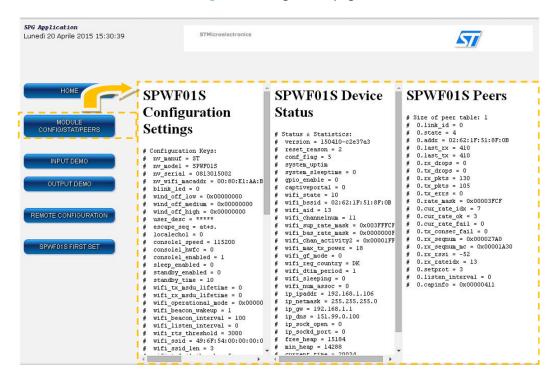

AN4902 - Rev 2 page 15/49



2.5.1 HTML code – configuration.html

2.5.2 HTML code description – configuration.html

The configuration.html page allows user to create two frames that link to the "config.shtml" page and "status.shtml" page.

These web pages are stored in the internal Flash and can be customized and overwritten.

2.5.3 HTML code – config.shtml

```
Atml>
<html>
<head><title>ST SPWF01S Configuration Settings</title></head>
<body bgcolor="white" text="black">
<h1>SPWF01S Configuration Settings</h1>

<!--#devconf-->
```

AN4902 - Rev 2 page 16/49



</body>

</html>

2.5.4 HTML code description – config.shtml

The config.shtml page contains the " devconf" SSI tag.

Using this tag in a custom.shtml page, the user can obtain the module's configuration variables in real-time.

2.5.5 HTML code – status.shtml

<html>

<head><title>ST SPWF01S Device Status</title></head>

<body bgcolor="white" text="black">

<h1>SPWF01S Device Status</h1>

<

<!--#devsts-->

</body>

</html>

2.5.6 HTML code description – status.shtml

The status.shtml page contains the " *devsts* " SSI tag. Using this tag in a *custom.shtml* page, the user can obtain the module's status/statistics in real-time.

2.5.7 HTML code – peers.shtml

<html>

<head><title>ST SPWF01S Peers</title></head>

<body bgcolor="white" text="black">

<h1>SPWF01S Peers</h1>

<

<!--#peers-->

AN4902 - Rev 2 page 17/49



</body>

</html>

2.5.8 HTML code description – peers.shtml

The peers.shtml page contains the "peers" SSI tag. Using this tag in a custom.shtml page, the user can obtain the module's peers info in real-time.

Note: a new SSI devsts/devconf/peers optimization has been added in the FW 3.4.

<!--#x:y--> - "x" can be "devsts" or "devconf", "y" is status/configuration variable name

<!--#x:n:y--> - "x" is "peers", "n" is a number (0 to 5), and "y" is peer stat us variable name

For example:

<!--#devsts:wifi_state-->

<!--#devconf:user_desc-->

<!--#peers:1:link_id-->


It provides the status wifi_state variable, the config user_desc variable and the link_id of the peers No.1.

AN4902 - Rev 2 page 18/49



2.6 INPUT DEMO – input_demo.shtml

Figure 6. INPUT DEMO page

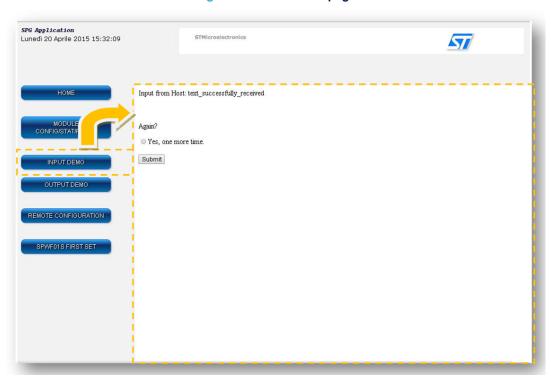

2.6.1 HTML code

AN4902 - Rev 2 page 19/49



</body>
</html>

2.6.2 HTML code description

The input_demo.shtml page included in the package is a replacement of the input_demo.shtml stored in the internal Flash memory of the module.

This page contains both the SSI tag and CGI.

The first asks the HOST to provide a message for client, while the second replaces the HTML comment (SSI) with this HOST's message.

Note: a new input_demo optimization has been added to the FW ver. 3.4.

- the SSI <!--#input--> provides an anonymous "wind:56:..." indication
- the SSI <! --#input: xxxx--> provides a "wind:56:xxxx" indication
- If additional colons are inserted in the SSI string (i.e. <!--#input:xxxx:demo:-->), they will be skipped and inserted in the "wind:56:..." indication (i.e. "wind:56:xxxx:demo:")


This feature allows the external host to discriminate between different clients performing the request.

VERY IMPORTANT

- Both client and server are pending (2 sec) after the page request. If no message is sent from the module, a timeout mechanism will be triggered.
- The SSI tag is triggered on the carriage return; therefore the message terminator must be <cr>
 cr>.

2.7 OUTPUT DEMO – output demo.html

Figure 7. OUTPUT DEMO page

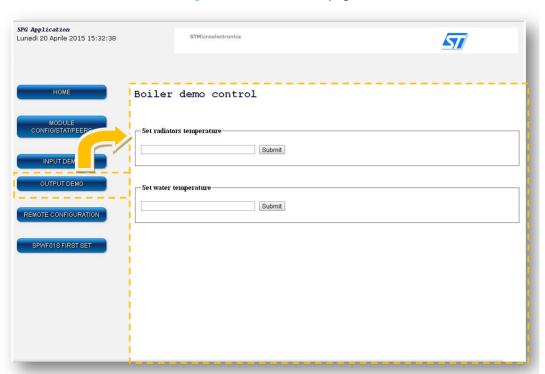

AN4902 - Rev 2 page 20/49



2.7.1 HTML code

```
<html>
<head><title>Boiler demo control</title></head>
<body bgcolor="white" text="black">
<span style="background-color: ;"><span style="color: #20124d;"><b><span style="fo"</pre>
nt-size: x-large;"><span style="font-family: &quot;Courier New&quot;,Courier,monos
pace;">Boiler demo control</span></span></b></i></span></span></pan>
<br><br><br><br><br><
<fieldset>
<legend><h4>Set radiators temperature</h4></legend>
        <form name="CGI Example" method="GET" action="output.cgi" >
        <input type="text" name="text" size="40" maxlength="40">&nbsp;
           <input type="submit" name="submit" value="Submit" >
          </form>
        </fieldset>
<br><br><br>>
<fieldset>
<legend><h4>Set water temperature</h4></legend>
        <form name="CGI Example" method="GET" action="output.cgi" >
        <input type="text" name="text" size="40" maxlength="40">&nbsp;
            <input type="submit" name="submit" value="Submit" >
          </form>
        </fieldset>
```

AN4902 - Rev 2 page 21/49



</body>

</html>

2.7.2 HTML code description

The output_demo.html included in the package is a replacement of the output_demo.html stored in the internal Flash memory.

The user can customize the output_demo.html in order to create a dynamic page to send data to the module.

The output_demo.html contains the *output.cgi* link that allows the user to push data over the module's UART. So, all of the text put into the box will be sent to the UART after the submit action.

Please note that *output.cgi* always redirects to the "output_demo.html" as a last action. See the Appendix for a set of examples to build different output_demo pages.

2.8 REMOTE CONFIGURATION – remote.html

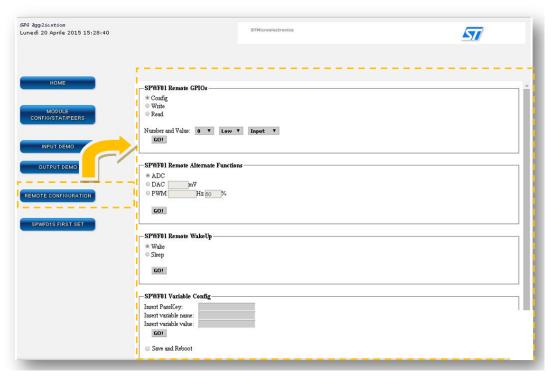


Figure 8. REMOTE CONFIGURATION page

2.8.1 HTML code

AN4902 - Rev 2 page 22/49



```
<body>
<script>
function setVar()
if(document.getElementById("cbox").checked)
  {alert("Press OK to send, then wait a few seconds.")}
function setC()
document.getElementById("LoI").disabled=true;
document.getElementById("IoO").disabled=false;
function setW()
document.getElementById("LoI").disabled=false;
document.getElementById("IoO").disabled=true;
function setR()
document.getElementById("LoI").disabled=true;
document.getElementById("IoO").disabled=true;
function setA()
```

AN4902 - Rev 2 page 23/49



```
document.getElementById("vlt").disabled=true;
document.getElementById("frq").disabled=true;
document.getElementById("dc").disabled=true;
function setD()
document.getElementById("vlt").disabled=false;
document.getElementById("frq").disabled=true;
document.getElementById("dc").disabled=true;
function setP()
document.getElementById("vlt").disabled=true;
document.getElementById("frq").disabled=false;
document.getElementById("dc").disabled=false;
</script>
<fieldset>
<legend><h4>SPWF01 Remote GPIOs</h4></legend>
<form enctype="text/plain" method="get" action="remote.cgi" name="confiGPIOs">
<input type="radio" name="OpName" value="CONFIG" onclick="setC()" checked/>Config
br/>
<input type="radio" name="OpName" value="WRITE" onclick="setW()"/>Write<br/>
```

AN4902 - Rev 2 page 24/49



```
Number and Value: 
<select name="Number" style="margin-left: 10px; color: #000000; font-family:
Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc;">
  <option value="0">0</option>
  <option value="1">1</option>
  <option value="2">2</option>
  <option value="3">3</option>
  <option value="4">4</option>
  <option value="5">5</option>
  <option value="6">6</option>
  <option value="7">7</option>
  <option value="8">8</option>
  <option value="9">9</option>
  <option value="10">10</option>
  <option value="11">11</option>
  <option value="12">12</option>
  <option value="13">13</option>
  <option value="14">14</option>
  <option value="15">15</option>
  </select>
 <select disabled id="LoI" name="Value" style="margin-left: 10px; color: #0000
00; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #c
ccccc;">
```

AN4902 - Rev 2 page 25/49

<option value="0">Low</option>



```
<option value="1">High</option>
```

</select>

<select id="IoO" name="Direction" style="margin-left: 10px; color: #000000; f ont-family: Verdana; font-weight: bold; font-size: 12px; background-color: #ccccc;">

<option value="0">Input</option>

<option value="1">Output</option>

</select>

<input type="submit" name="set" value="GO!" style="margin-left: 20px; color: #00
0000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color:
#ccccc;">

</fieldset>

</form>

<fieldset>

<legend><h4>SPWF01 Remote Alternate Functions</h4></legend>

<form enctype="text/plain" method="get" action="remote.cgi" name="confiAFs">

<input type="radio" name="OpName" value="ADC" onclick="setA()" checked/>AD C

<input type="radio" name="OpName" value="DAC" onclick="setD()"/>DAC
td>

<input type="text" name="voltage" id="vlt" size="4" disabled="true">mV

<input type="radio" name="OpName" value="PWM" onclick="setP()"/>PWM
td>

<input type="text" name="frequency" id="frq" size="8" disabled="true">Hz

AN4902 - Rev 2 page 26/49



```
<input type="text" name="dcycle" id="dc" size="2" value="50" disabled="true">%
<br/>
 <input type="submit" name="AFset" value="GO!" style="margin-left: 20px; color: #</pre>
000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color
: #ccccc;">
</fieldset>
</form>
<br/>
<fieldset>
<legend><h4>SPWF01 Remote WakeUp</h4></legend>
<form enctype="text/plain" method="get" action="remote.cgi" name="configPMs">
<input type="radio" name="OpName" value="WAKE" checked/>Wake<br/>
<input type="radio" name="OpName" value="SLEEP"/>Sleep<br/><br/>
<input type="submit" name="change" value="GO!" style="margin-left: 20px; color: #0</pre>
00000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color:
 #cccccc;">
</fieldset>
</form>
<br/>
<fieldset>
<legend><h4>SPWF01 Variable Config</h4></legend>
<form enctype="text/plain" method="get" action="remote.cgi" name="variables">
Insert PassKey:
```

AN4902 - Rev 2 page 27/49



<input type="password" style="margin-left: 10px; color: #000000; font-family:
Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="KEY
">

Insert variable name:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="VAR">
td>

Insert variable value:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="VAL">
td>

<input type="submit" name="SCFG" value="GO!" onclick="setVar()" style="margin-le
ft: 20px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px
; background-color: #cccccc;">

<input type="checkbox" name="box" id="cbox"> Save and Reboot

</fieldset>

</form>

</body>

</html>

2.8.2 HTML code description

The remote.html page reported in this AN is stored in the internal Flash of the module.

In any case, the user can build a new remote.html page using the code provided in the previous section.

In this page, the remote.cgi is used which allows users to perform GPIO control (write, config and read) as described in the user manual

AN4902 - Rev 2 page 28/49



In detail:

The script section (in blue) allows management of the multiple-choice boxes to conveniently enable/disable their functioning.

The main section contains the HTML code to create a whole form.

• The remote.cgi page must be included in the HTML form:

```
<form enctype="text/plain" method="get" action="remote.cgi" name="configure"
>
```

The following HTML code allows management of the available actions (config, write, read):

```
<input type="radio" name="OpName" value="CONFIG" onclick="setC()" checked/>C
onfig<br/>or/>
```

```
<input type="radio" name="OpName" value="WRITE" onclick="setW()"/>Write<br/>
```

```
<input type="radio" name="OpName" value="READ" onclick="setR()"/>Read<br/>tr/>
```

The user can customize the "input type" field (radio) and the "name" field (OpName). The "value" field (CONFIG, WRITE and READ) cannot be modified to correctly run the CGI script.

• The following code allows creating the multiple choice boxes (GPIO number to control, value or direction)

```
Number and Value: 

> (td> (select name="Number" style="margin-left: 10px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc;">

<option value="0">0</option>

<option value="2">2</option>

<option value="3">3</option>

<option value="4">4">4</option>
```

<option value="5">5</option>

AN4902 - Rev 2 page 29/49



```
<option value="6">6</option>
  <option value="7">7</option>
  <option value="8">8</option>
  <option value="9">9</option>
  <option value="10">10</option>
  <option value="11">11</option>
  <option value="12">12</option>
  <option value="13">13</option>
  <option value="14">14</option>
  <option value="15">15</option>
  </select>
<select disabled id="LoI" name="Value" style="margin-left: 10px; color: #0000
00; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #c
ccccc;">
 <option value="0">Low</option>
 <option value="1">High</option>
 </select>
<select id="IoO" name="Direction" style="margin-left: 10px; color: #000000; f
ont-family: Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc
 <option value="0">Input</option>
  <option value="1">Output</option>
  </select>
```

AN4902 - Rev 2 page 30/49

The following code allows the user to correctly send his choice to the module



<input type="submit" name="set" value="GO!" style="margin-left: 20px; color: #0000
00; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #c
cccc;">

The "name" field (set) cannot be modified to correctly run the CGI script.

Note: the CGI script checks the number of parameters added in the HTML page (READ: 2 parameters, WRITE/CONFIG: 3 parameters); therefore it is very important respect the workflow described above.

The same considerations can be applied for the remote ADC/DAC/PWM, Wake/Sleep and Variable config HTML code.

GPIO CONTROL in-a-click

The remote.cgi page can also be used by a single HTTP GET from the HOST.

READ a GPIC

[Module IP Address]/remote.cgi?OpName=READ&Number=[GPIO to be read]&set=GO

i.e. http://192.168.1.100/remote.cgi?OpName=READ&Number=5&set=GO

WRITE a GPIC

[Module IP Address]/remote.cgi?OpName=WRITE&Number=[GPIO to be wrote]&Value=[0 for Low, 1 for High]&set=GO

i.e. http://192.168.1.100/remote.cgi?OpName=WRITE&Number=8&Value=1&set=GO

CONFIG a GPIO

[Module IP Address]/remote.cgi?OpName=CONFIG&Number=[GPIO to be configured]&Direction=[0 for Input, 1 for Output]&set=GO

i.e. http://192.168.1.100/remote.cgi?OpName=CONFIG&Number=7&Direction=1&set=GO

2.9 SPWF01S FIRST SET – firstset.html

Figure 9. SPWF01S FIRST SET page



AN4902 - Rev 2 page 31/49



2.9.1 HTML code

<html> <head> <meta content="text/html; charset=ISO-8859-1" http-equiv="content-type"> <title>firstset</title> </head> <body> <form enctype="text/plain" method="get" action="firstset.cgi" name="configure"> <fieldset> <legend><h4>SPWF01 First Config</h4></legend> Insert miniAP PassKey: <input type="password" style="margin-left: 10px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="KEY "> Insert the SSID: <input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="SSID">< /td> Insert the PSK: <input type="password" style="margin-left: 10px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="PWD ">

AN4902 - Rev 2 page 32/49



```
Insert Static IP Address:
<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd
ana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="IP"></t
d>
Insert Static NetMask:
<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd
ana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="MASK"><
/td>
Insert Static GW Address:
<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd
ana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="GW"></t
Insert Static DNS Address:
<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd
ana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="DNS"></
td>
Turn on/off DNS/DHCP:
```

AN4902 - Rev 2 page 33/49

rdana; font-weight: bold; font-size: 12px; background-color: #ccccc;">

<select name="Dhcp" style="margin-left: 10px; color: #000000; font-family: Ve



```
<option value="0">OFF</option>
  <option value="1" selected>ON</option>
 </select>
Choose Auth Type:
<select name="IbssAuth" style="margin-left: 10px; color: #000000; font-family
: Verdana; font-weight: bold; font-size: 12px; background-color: #ccccc;">
 <option value="0">Open System</option>
 <option value="1">Shared Key</option>
 </select>
Choose Auth:
<select name="Auth" style="margin-left: 10px; color: #000000; font-family: Ve
rdana; font-weight: bold; font-size: 12px; background-color: #ccccc;">
 <option value="0">Open</option>
 <option value="1">Wep</option>
 <option value="2">Wpa & Wpa2 Personal</option>
 <!--<option value="3">Wpa Enterprise</option>-->
 </select>
Choose Mode:
<select name="Mode" style="margin-left: 10px; color: #000000; font-family: Ve
rdana; font-weight: bold; font-size: 12px; background-color: #cccccc;">
```

AN4902 - Rev 2 page 34/49



```
<option value="0">Idle</option>

<option value="1">Station</option>

<option value="2">IBSS</option>

<option value="3">Mini AP</option>

</select>

<input type="submit" name="confirm" value="G0!" onclick="alert('Press OK to send, then wait a few seconds.')" style="margin-left: 20px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc;">

</fieldset>

</body>
</html>
```

2.9.2 HTML code description

The firstset.cgi allows also performing the first configuration of the SPWF01S Module.

Following the HTML code reported above, it is necessary to observe these steps:

The firstset.cgi page must be included in the HTML form

<form enctype="text/plain" method="get" action=" firstset.cgi" name="configure">

Insert the 1st parameter (KEY)

Insert miniAP PassKey:

<input type="password" style="margin-left: 10px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="KEY">

The "name" field (KEY) cannot be modified to correctly run the CGI script.

Insert the 2nd parameter (SSID)

Insert the SSID:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd
ana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="SSID">

The "name" field (SSID) cannot be modified to correctly run the CGI script.

AN4902 - Rev 2 page 35/49



Insert the 3rd parameter (PWD)

Insert the PSK:

<input type="password" style="margin-left: 10px; color: #000000; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #ccccc;" name="PWD">

The "name" field (PWD) cannot be modified to correctly run the CGI script.

Insert the 4th parameter (IP)

Insert Static IP Address:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="IP"></t d>

The "name" field (IP) cannot be modified to correctly run the CGI script.

Insert the 5th parameter (MASK)

Insert Static NetMask:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="MASK">
/td>

The "name" field (MASK) cannot be modified to correctly run the CGI script.

Insert the 6th parameter (GW)

Insert Static GW Address:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="GW"></t d>

The "name" field (GW) cannot be modified to correctly run the CGI script.

Insert the 7th parameter (DNS)

Insert Static DNS Address:

<input type="text" style="margin-left: 10px; color: #000000; font-family: Verd ana; font-weight: bold; font-size: 12px; background-color: #cccccc;" name="DNS">

The "name" field (DNS) cannot be modified to correctly run the CGI script.

Insert the 8th parameter (IbssAuth)

Choose Auth Type:

<select name="IbssAuth" style="margin-left: 10px; color: #000000; font-family : Verdana; font-weight: bold; font-size: 12px; background-color: #ccccc;">

<option value="0">Open System</option>

AN4902 - Rev 2 page 36/49



```
<option value="1">Shared Key</option>
```

```
</select>
```

The "name" field (IbssAuth) cannot be modified to correctly run the CGI script.

Insert the 9th parameter (Auth)

```
Choose Auth:
```

<select name="Auth" style="margin-left: 10px; color: #000000; font-family: Ve rdana; font-weight: bold; font-size: 12px; background-color: #cccccc;">

```
<option value="0">Open</option>
```

```
<option value="1">Wep</option>
```

```
<option value="2">Wpa & Wpa2 Personal</option>
```

```
</select>
```

The "name" field (Auth) cannot be modified to correctly run the CGI script.

Insert the 10th parameter (Mode)

```
Choose Mode:
```

<select name="Mode" style="margin-left: 10px; color: #000000; font-family: Ve rdana; font-weight: bold; font-size: 12px; background-color: #cccccc;">

```
<option value="0">Idle</option>
```

```
<option value="1">Station</option>
```

```
<option value="3">Mini AP</option>
```

```
</select>
```

The "name" field (Mode) cannot be modified to correctly run the CGI script.

Insert the last parameter (confirm)

```
<input type="submit" name="confirm" value="GO!" onclick="alert('Press OK to send, then wait a few seconds.')"</pre>
```

The "name" field (confirm) cannot be modified to correctly run the CGI script.

FIRST SET in-a-click

The first configuration of the module can be also performed by a single HTTP GET from the HOST.

FIRST SET

[module IP address]/firstset.cgi?KEY=anonymous&SSID=[insert the network SSID]&PWD=[insert the password]&IP=[only if DHCP is OFF]&MASK=[only if DHCP is OFF]&GW=[only if DHCP is OFF]&DNS=[only if DHCP is OFF]&Dhcp=[insert 1 for DHCP on, 0 for DHCP off]&IbssAuth=[only for WEP, 0 for OPEN System/1 for Shared Key]&Auth=[0 for open, 1 for WEP, 2 for WPA/WPA2]&Mode=[0 for idle, 1 for station, 2 for IBSS, 3 for Mini AP]&confirm=GO

AN4902 - Rev 2 page 37/49



i.e. how to configure a WPA/WPA2 network:

http://192.168.1.100/firstset.cgi?

KEY=anonymous&SSID=AndroidAP&PWD=mypassword&Auth=2&Mode=1&confirm=GO

Note: To use values already set inside the module, do not insert the associated "name=value" tuple into the request string.

AN4902 - Rev 2 page 38/49



3 Appendix A

3.1 Output demo – multiple text boxes

The following example illustrates how to create a custom web page (i.e. output_boxes.html) containing multiple text boxes.

Figure 10. Boiler demo control page

Boiler demo	control		
Set radiators temperature			
	Submit		
Set water temperature			
	Submit		

3.1.1 HTML code

```
<html>
<head><title>Boiler demo control</title></head>
<body bgcolor="white" text="black">

<script>

var allowSubmit = true;

function testSubmit() {

if (!allowSubmit)

return false;

allowSubmit = false;
```

AN4902 - Rev 2 page 39/49



```
document.getElementById("submitButton").disabled = true;
      setTimeout(function() {
                    allowSubmit = true;
                    document.getElementById("submitButton").disabled = false;
                 }, 1000);
      return true;
</script>
<span style="background-color: ;"><span style="color: #20124d;"><b><span style="fo"</pre>
nt-size: x-large;"><span style="font-family: &quot;Courier New&quot;,Courier,monos</pre>
pace;">Boiler demo control</span></span></b></i></span></span></pan>
<fieldset>
<legend><h4>Set radiators temperature</h4></legend>
          <form name="CGI Example" method="GET" action="output.cgi" onSubmit="r</p>
eturn testSubmit();">
          <input type="text" name="text" size="40" maxlength="40">&nbsp;
                 <input id="submitButton" type="submit" name="submit" value="Submi</pre>
t" >
              </form>
          </fieldset>
<br><br><br>>
<fieldset>
```

AN4902 - Rev 2 page 40/49



3.1.2 HTML code description

Because the output.cgi automatically redirects to the output_demo.html, this HTML code allows the user to skip the automatic redirect, if it is not required.

In detail:

- The script section of the code enables skipping of the automatic redirect
- Insert the "form" including the "Onsubmit" tag:

```
<form name="CGI Example" method="GET" action=" output.cgi" OnSubmit="setTimeou t('redirect()',</p>
```

3.2 Output demo using jQuery library – button

The following example shows how to create a web page (output_button.html) containing a button to send data (encapsulated in the button) from the HOST to the module's UART. The jQuery library must be linked in the HTML code or added in the module's web server.

AN4902 - Rev 2 page 41/49



Figure 11. Output demo page with submit button



3.2.1 HTML code

<

AN4902 - Rev 2 page 42/49



```
<DIV align="left">
<button style="
width: 7em;
padding: .2em;
color: #ffffff;
text-shadow: 1px 1px 1px #000000;
border: solid thin #882c13;
-webkit-border-radius: .7em;
-moz-border-radius: .7em;
border-radius: .7em;
-webkit-box-shadow: 2px 2px 3px #999999;
box-shadow: 2px 2px 2px #bbbbbb;
background-color: #ce411c;
background-image: -webkit-gradient(linear, left top, left bottom,
from(\#e9fde8), to(\#ce411c),color-stop(0.4, \#8c1b1b));">Click to submit</button></a
></DIV>
</body>
</html>
```

3.2.2 HTML code description

The jQuery library (jQuery.min.js, ~70 KBytes) is included in the package and is already included in the outfile.img.

About the code:

The first script allows data to be customized for sending to the module's UART

```
$.get("output.cgi?text=Data&submit=Submit");
```

The second part of the code allows the building of the HTML5 button.

```
vidth: 7em;
```

AN4902 - Rev 2 page 43/49



```
padding: .2em;

color: #ffffff;

text-shadow: 1px 1px 1px #000000;

border: solid thin #882c13;

-webkit-border-radius: .7em;

-moz-border-radius: .7em;

border-radius: .7em;

-webkit-box-shadow: 2px 2px 3px #999999;

box-shadow: 2px 2px 2px #bbbbbb;

background-color: #ce411c;

background-image: -webkit-gradient(linear, left top, left bottom,

from(#e9fde8), to(#ce411c),color-stop(0.4, #8c1b1b));">Click to submit</button></a>
```

AN4902 - Rev 2 page 44/49



Revision history

Table 1. Document revision history

Date	Version	Changes
01-Sep-2016	1	Initial release.
10-Jul-2018	2	Updated features and Section 2.9.2 HTML code description.

AN4902 - Rev 2 page 45/49



Contents

1	Ove	rview		2	
	1.1	Currer	nt CGIs (hardcoded in the module)	2	
	1.2	Currer	nt SSIs (hardcoded in the module)	2	
	1.3	CGI vs	s. SSI	2	
		1.3.1	CGI and SSI enable/disable	2	
2	Dyn	amic w	ebsite	3	
	2.1	Index	Index page – index.html		
		2.1.1	HTML code	3	
		2.1.2	HTML code description	4	
	2.2	Your b	panner frame – your_banner.html	4	
		2.2.1	HTML code	5	
		2.2.2	HTML code description	5	
	2.3	Menu	frame – menu.html	5	
		2.3.1	HTML code	6	
		2.3.2	HTML code description	13	
	2.4	HOME	E page (main frame) – home.html	14	
		2.4.1	HTML code	14	
		2.4.2	HTML code description	15	
	2.5	MODULE CONFIG/STAT/PEERS PAGE – configuration.html			
		2.5.1	HTML code – configuration.html	15	
		2.5.2	HTML code description – configuration.html	16	
		2.5.3	HTML code – config.shtml	16	
		2.5.4	HTML code description – config.shtml	17	
		2.5.5	HTML code – status.shtml	17	
		2.5.6	HTML code description – status.shtml	17	
		2.5.7	HTML code – peers.shtml	17	
		2.5.8	HTML code description – peers.shtml	18	
	2.6	INPUT	T DEMO – input_demo.shtml	18	
		2.6.1	HTML code	19	
		2.6.2	HTML code description	20	



	2.7	OUTPU	JT DEMO – output_demo.html	20
		2.7.1	HTML code	20
		2.7.2	HTML code description	22
	2.8	REMO	TE CONFIGURATION – remote.html	22
		2.8.1	HTML code	22
		2.8.2	HTML code description	28
	2.9	SPWF	01S FIRST SET – firstset.html	31
		2.9.1	HTML code	31
		2.9.2	HTML code description	35
3	Appe	Appendix A		
	3.1	Output	demo – multiple text boxes	39
		3.1.1	HTML code	39
		3.1.2	HTML code description	41
	3.2	Output	demo using jQuery library – button	41
		3.2.1	HTML code	42
		3.2.2	HTML code description	43
Pον	rieion I	hietory		15



List of figures

Figure 1.	Index page	. 3
Figure 2.	Dynamic web page customization page	. 4
Figure 3.	Menu frame	. 5
Figure 4.	Home page - main frame	14
Figure 5.	Configuration page	15
Figure 6.	INPUT DEMO page	19
Figure 7.	OUTPUT DEMO page	20
Figure 8.	REMOTE CONFIGURATION page	22
Figure 9.	SPWF01S FIRST SET page	31
Figure 10.	Boiler demo control page	39
Figure 11.	Output demo page with submit button	42



IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics - All rights reserved

AN4902 - Rev 2 page 49/49