
PROFESSIONAL INSTALLATION,
OPERATING AND SERVICE MANUAL

TITANIUM LT

- ☐ MONO / BP420H1B
- ☐ DUO / BP420H1DUOB
- ☐ TRIO / BPWHF8000

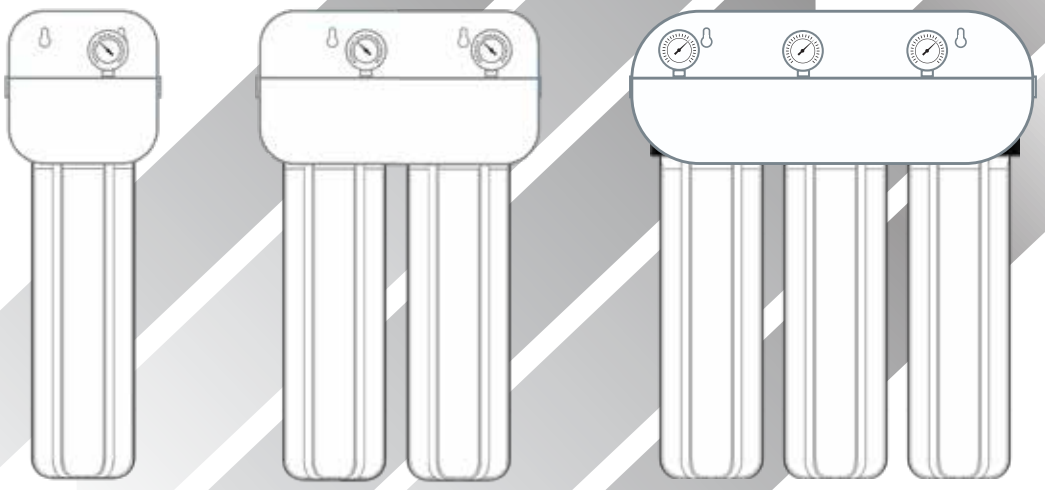

Components certified by IAPMO R&T to NSF/ANSI 42, 53, 61, 401.
In compliance with Drinking Water Treatment Units regulations, USA and Canada.
(refer to each filter for its unique certification)

PLATINUM SERIES

TITANIUM LT
WHOLE HOUSE WATER SYSTEM
FLEXIBLE CUSTOMIZED FILTRATION

V. 11/05/2026

AVAILABLE FILTER OPTIONS

- ☐ SEDIMENT / BPWHF8001
- ☐ POLY-PHOSPHATE / BPWHF8005
- ☐ CHLORINE,CHLORAMINE / BPWHF8004
- ☐ LEAD,VOC / BPWHF8002
- ☐ PFAS,PHARMACEUTICAL / BPWHF8003
- ☐ CHLORAMINE PLUS / BPWHF8006

BRITA | PRO®

TABLE OF CONTENTS

1 - Safety Alert Symbols	1
2 - General Information	1
3 - Personnel's Qualification	2
4 - Precautions, Warnings	2
5 - Installation	3
6 - Start Up	4
7 - Use	5
8 - Spare Parts	5
9 - Cartridge Replacement	6
10 - Maintenance	7
11 - Troubleshooting	7
12 - Filter and Cartridge Disposition	7

1 - Safety Alert Symbols

WARNING

WARNING SIGN: Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury. It highlights conditions that are a serious risk for personal safety.

CAUTION

CAUTION SIGN: Indicates a potentially hazardous situation which, if not avoided, may result in a minor or moderate injury, and to alert against unsafe practices.

NOTICE

NOTICE SIGN: Alerts you to pertinent facts and conditions.

2 - General Information

CAUTION PLEASE READ THIS INSTRUCTION MANUAL THOROUGHLY AND CAREFULLY AND UNDERSTAND ITS CONTENTS BEFORE INSTALLING THE BRITA PRO® FILTER HOUSING.

- The information in this instruction manual is subject to modifications without prior notice and is not binding on the manufacturer Brita PRO®
- Keep the instruction manual for future reference.

Product Identification:

A label carrying product identification is applied on the package of the product. An additional label describing maximum working pressure and maximum working temperature is applied to the filter housing.

The label must not be removed, tampered, hidden, covered, or changed.

If the label on the product is missing or the operational conditions on the label are not legible, ***DO NOT INSTALL*** the filter and contact a Brita PRO Authorized Dealer or contact Brita PRO technical support at (828) 449-2023.

WARNING

⚠ The values of the maximum working temperature and the maximum working pressure shown in the label affixed to the filter housing are intended as maximum working parameters and must not be exceeded under any circumstances.

The filter cartridge intended to operate with this filter housing may not be included in the package and must be purchased separately. Carefully choose the filter cartridge fit for the selected filter housing in the literature and pamphlets made available by Brita PRO® Authorized Dealers.

Use only original Brita PRO® Filter Cartridges. The use of cartridges different from the original ones voids the warranty.

3 - Personnel's Qualification

ONLY QUALIFIED AND LICENSED PERSONNEL MAY PERFORM INSTALLATION, SERVICE AND MAINTENANCE OF THE BRITA PRO® FILTERS.

4 - Precautions, Warnings

READ ALL INSTRUCTIONS AND PRECAUTIONS BEFORE INSTALLING AND USING YOUR BRITA PRO® PRODUCT.

WARNING

⚠ **Do not install near electric appliances.**

⚠ **Before installation ensure that any electric plugs in the vicinity of the area are disconnected.**

⚠ **Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on waters that contain filterable cysts.**

CAUTION **Turn-off the water main before installation.**

5 - Installation

Refer to Fig. A, B and C for installation directions (see page 4).

- Before installation, check if the plumbing system has been set-up according to the applicable plumbing code.
- Avoid all kinds of tensions by using a Brita PRO® wall bracket. Should the use of the wall bracket be impossible, the instavller (qualified and licensed personnel) shall be responsible for the most appropriate installation avoiding tensions which may affect the filter's integrity.
- Connect the inlet to the product's side with the label IN and the outlet to the side with the label OUT. (Fig. B)
- Connect to pipes using a male 1" NPT fittings on the inlet and outlet sides, into the female NPT threads on titanium manifold.
- Use Teflon/sealant (Blue Monster ONLY) to create leak proof seal. Use of any other material other than Blue Monster may void warranty.
- The installation of a By-pass is highly recommended (see Fig. A).
- Refer to page 6 (Section 9) for step-by-step instructions for the insertion of a (new) cartridge.

Sump Drain Kit Installation

Locate the threaded port at the bottom of the filter housing bowl and apply the provided thread sealant on the Sump drain threads and barbed adapter.

THREADS

- ***Nipple Installation:*** Screw the plastic nipple (with O-ring/gasket) into the ball vale shut off.
- ***Ball Valve:*** Screw the ball valve onto the bottom sump drain ports. Ensure the gasket is in place.
- ***Secure Connection:*** If using a hose, connect a polyvinyl tube and secure it with a stainless steel clamp.



Drain Part Kit - 3-stage Drain Valve

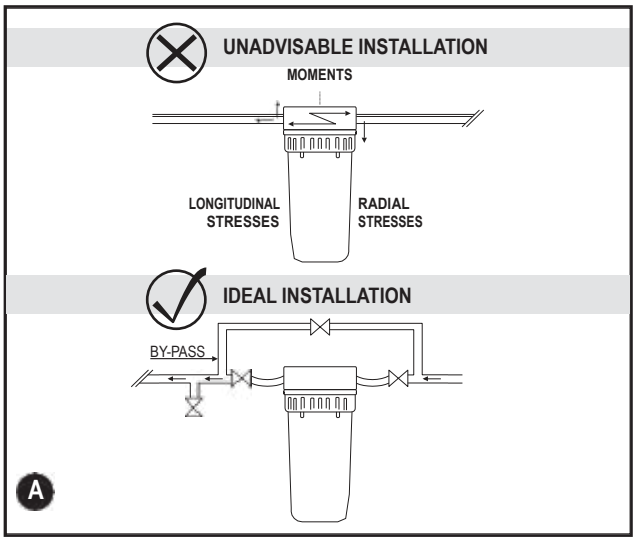


Figure A

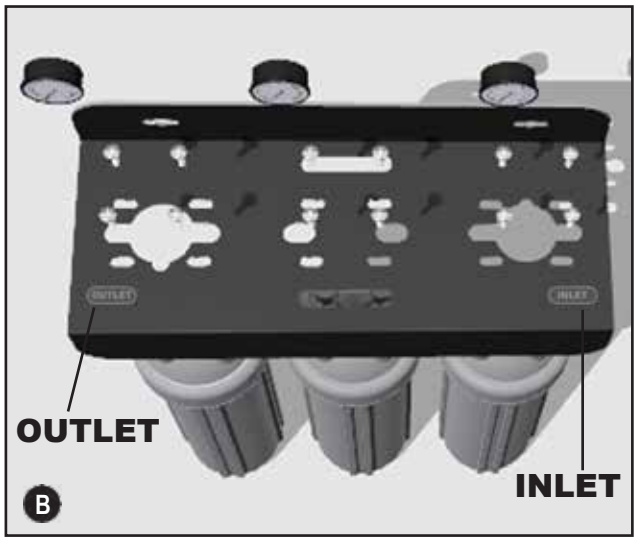


Figure B

INSTALLATION LAY OUT *(CV = Check Valve, BV = Ball Valve)*

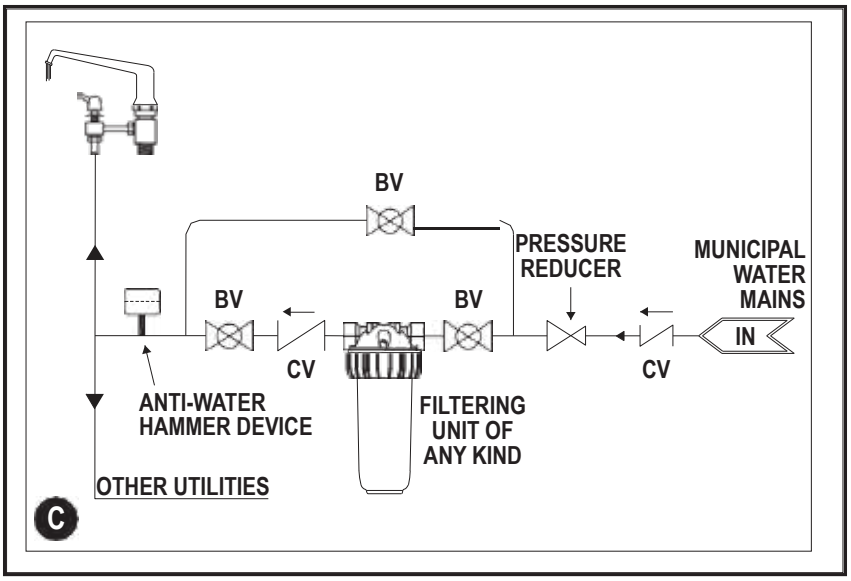


Figure C

6 - Start Up

- After the installation, run the tap and let the water flow for at least 5 minutes before use.

CAUTION The initial quality of the water will not be optimal unless the tap runs for at least 5 minutes before use.

7 - Use

(check the label on the package to identify the filter housing series and model)

- Refer to Figure C for installation layout (see page 4).
- Three Piece and Big filter housing with plastic threaded connections are certified against NSF/ANSI Standards 42 and 61 for the filtration of drinking water. In case of use for the filtration of drinking water, do not use for filtration of water that is unsafe or of unknown quality.
- Respect the working parameters shown on label affixed to the filter housing.
- If pressure exceeds the working conditions, protect the product with a pressure reducer.
- Use only opaque (grey) housings models for installation under direct light. Filter housings with designations transparent and opaque must be supplied with cold water only.
- Use only HOT filter housing models for hot water filtration (applicable working temperature on product's label).
- Protect from excessive cold or heat: do not expose to temperature below 39°F (4°C) or above 113°F (45°C) all housings models with the only exception of HOT model which can stand up to 176°F (80°C).
- Protect from back-flows of hot water (except for HOT models within working parameters) with a non-return valve.
- Protect from hammering with an anti-hammering device.

CAUTION

The values of the maximum working temperature and the maximum working pressure shown in the label affixed to the filter housing are intended as maximum working parameters and must not be exceeded. Use of the filter housing under higher pressure conditions could cause ruptures.

8 - Accessories, spare parts and filter cartridges

Accessories, spare parts and filter cartridges are available through Brita PRO® Authorized Dealers. In case of difficulties contact Brita PRO technical support at (828) 449-2023.


NOTICE

Use only original Brita PRO® Filter Cartridges.
The use of non-original Brita PRO® cartridges voids the warranty.


9 - Operations for Filter Cartridge replacement

NOTICE **The filter cartridge is not included in the package and must be purchased separately.**

See figures and follow step-by-step instructions below to replace the filter cartridge.
Using anything other than original Brita PRO® cartridges voids the warranty.




The average life of a filter cartridge varies depending on use, environmental conditions, pressure, water chemistry, etc. In general, changes in taste, odor, or color in the water indicate that the cartridge should be replaced.



A. Before opening the filter housing turnoff the water main (fig.1) and place a tray or bucket under the system to catch any water spilling during the removal of the filter cartridge.

B. Release the pressure from the product by un-screwing the GREY vent-valve on top of the head (fig. 2). This can also be done by opening a faucet in the home to relieve pressure as well. Remove the Black Drain nut on the bottom of each housing. Drain the water from each sump.

C. Open the housing by unscrewing the housing counter clockwise. The use of the filter wrench will be required. If you have a hard time unscrewing DO NOT force loose. Tap filter wrench either with hand or rubber mallet to break loose seal on filter housing (fig. 3).



D. Remove the used cartridge (fig. 4).

E. Wipe clean the filter housing with mild non scented soap and water, soft sponge, rinse thoroughly, and sanitize housing. Replace the Drain nut.

F. Open the new cartridge wrap and discard wrap (fig. 5).


G. Insert the new cartridge and place it into the housing (make sure you use sanitary gloves when handling new cartridges) (fig 6).




H. Remove old O-ring and inspect for dry cracking, tears, and/or pinches. If any of these are present replace. If not, ***FLIP*** O-ring to other side and lubricate and re insert in grove of cartridge housing. Tighten the housing sump to manifold using the wrench (fig. 7). DO NOT over tighten.


I. Turn-on the water main valve slowly only 45 degrees (fig. 8).


J. Wait for air purge from the GREY vent-valve, then turn and tighten the vent-valve (fig. 9).





K. Let the water flow for at least 5 minutes before use (fig. 10) (this also can be done if you left a faucet in the home open).











10 - Maintenance

- Replace the filter sump housing at least every 5 years.
- For maintenance and replacement of filter cartridges follow the instructions on the filter cartridge wrap/package.
- Lightly apply silicon lube to the O-ring.
- If not in use for a long period of time remove the filter cartridge, and restart operating per the maintenance/replacement procedure indicated on the filter cartridge wrap/package.
- Every time the system is maintained or filter replaced, always inspect O-rings for dry cracking, tears, or pinches. If any of these are present replace O-ring. If not, ***FLIP*** O-ring to other side and lubricate and re insert in grove of cartridge. Refer to troubleshooting guide if necessary.

CAUTION After carrying out maintenance operations, run the tap for at least 5 minutes before using the water.

11 - Troubleshooting

MALFUNCTION	***CAUSE***	***REMEDY***
Leaks between housing and housing head	A. Housing not sufficiently tightened B. O-ring damaged or worn	A. Tighten further the housing with the wrench. B. Inspect O-rings for dry cracking, tears, or pinches. If any of these are present replace O-ring. If not, ***FLIP*** O-ring to other side and lubricate and re-insert in grove of cartridge. C. If the housing still leaks, change the housing's O-ring with a new one (use original replacement / spare parts).
Leaks in inlet / outlet connections	A. Not enough sealant tape and/or sealant, tape connection not sufficiently tightened. B. Improper connection type	A. Remove the previous sealing tape from the fitting and place more Blue Monster sealing tape and/or Blue Monster sealant. Tighten the connection properly. B. Use only fittings that match the type of fittings as indicated on the sump head. NPT tapered (conical) fittings fit only fittings with NPT indication on the sump head.

12 - Filter Housing and Cartridge Disposition

Filters housings and used filter cartridges must be disposed of in accordance with applicable rules and regulations.

NOTICE **We recommend that before installing a water filtration system you have the water tested to determined actual water filtering needs.**

NOTICE **If the filter housing is provided without filter cartridge it can be selected in the literature and pamphlets made available by Brita PRO® Authorized Dealers.**

NOTICE **Use only original Brita PRO® Filter Cartridges.**
The use of non-original Brita PRO® cartridges voids the warranty.

MAINTENANCE DATA COLLECTION

DATE	*TYPE OF MAINTENANCE*

NOTES



Brita PRO by Protect Plus Pro LLC

420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com

BRITA PRO® trademark and logo are registered trademarks of Brita LP and used under license by Protect Plus, LLC. All rights reserved.