BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Point of Use

CATEGORY

Platinum Series / Reverse Osmosis

SYSTEM PARAMETERS

3-STAGE QUICK TWIST
Improves Taste, Reduces Odors

PRODUCT FEATURES

- Combines micron/carbon/membrane filtration with state of the art reverse osmosis technology for taste and quality
- Removes impurities while improving the taste, color and smell of your drinking and cooking water
- Goes beyond water - improves the taste of food cooked in water
- Helps your family, helps the earth - encourages your family to drink more water while reducing consumption and the environmental damage of bottled water
- Certified for lead, barium, nitrate, copper fluoride ions and other contaminants to **NSF/ANSI Standard 58 by NSF**
- Quick Connect sumps for ease of filter replacement
- Built-in bypass
- A variety of faucet designs and finishes are available to complement your kitchen decor
- Made in the USA

5 YEAR WARRANTY
WORKMANSHIP AND MATERIALS

1 YEAR WARRANTY
MEMBRANE

NSF

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Point of Use

CATEGORY Platinum Series / Reverse Osmosis

SYSTEM PARAMETERS

3-STAGE QUICK TWIST

Improves Taste, Reduces Odor

Chlorine will damage a TFC Membrane. The Sediment / Carbon Module has been designed to reduce chlorine from the incoming water. Change filter every 6 to 12 months, more often if the water contains more than 1 ppm chlorine.

CAUTION: **DO NOT** use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before the system.


System Specifications

Model Number BPQC-50	U.S.	METRIC
Water Pressure	40 - 100 psig	280 - 690 kPa
TDS	2000 ppm max.	2000 mg/l max.
Temperature	40 - 100 °F	4 - 38 °C
pH	4 - 11 (optimum rejection at 7.0-7.5)	4 - 11 (optimum rejection at 7.0-7.5)
Hardness	< 10 g/g or soften	< 170 mg/l or soften
Iron	< 0.1 ppm	< 0.1 mg/1
Manganese	< 0.05 ppm	< 0.05 mg/1
Hydrogen Sulfide	None	None
Membrane Production *	41 - 53 gpd	155 - 201 lpd
Membrane TDS Reduction *	96% minimum	96% minimum
Drain (reject water) Flow	3 - 5 times product flow	3 - 5 times product flow
Empty Storage Tank pre-charge	5 - 7 psig air	35 - 48 kPa air
A measurement	14.5 in	36.83 cm
B measurement	12 in	30.48 cm
C measurement	5 in	12.7 cm

*Industry standards measure R.O. Membranes performance with no backpressure on the product water, at 65 psig (448 kPa) and 77 degrees F (25 degrees C).

Further conditions on the above are 600 ppm TDS. Production rate and TDS reduction figures hours. The production rate of a new Membrane can decrease by 10% on the scaling and fouling tendencies of the Feed Water.

System Dimensions

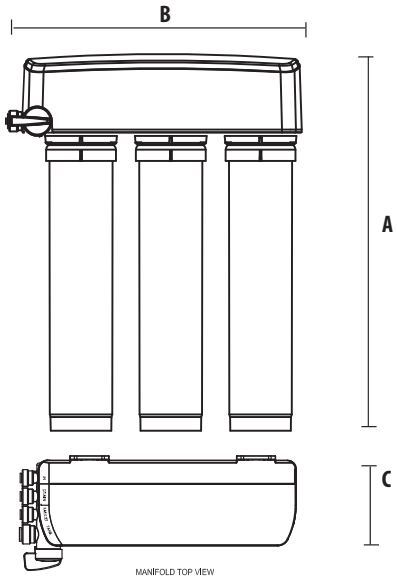

Replacements

50 GPD Membrane	BPQC50MB
Sediment / Carbon Pre-Filter	BPQC50SC
Post-In-Line Filter	BPS7206WJG

BRITA | PRO