BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Point of Use

CATEGORY

Platinum Series / Reverse Osmosis

SYSTEM PARAMETERS

3-STAGE STANDARD
Improves Taste, Reduces Odors

PRODUCT FEATURES

- Combines micron/carbon/membrane filtration with state of the art reverse osmosis technology for taste and quality
- Removes impurities while improving the taste, color and smell of your drinking and cooking water
- Goes beyond water - improves the taste of food cooked in water
- Helps your family, helps the earth - encourages your family to drink more water while reducing consumption and the environmental damage of bottled water
- Certified for lead, barium, nitrate, copper fluoride ions and other contaminants to **NSF/ANSI Standard 58 by NSF**
- A variety of faucet designs and finishes are available to complement your kitchen decor
- Made in the USA

5 YEAR WARRANTY
WORKMANSHIP AND MATERIALS

1 YEAR WARRANTY
MEMBRANE

NSF

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Point of Use

CATEGORY Platinum Series / Reverse Osmosis

SYSTEM PARAMETERS

3-STAGE STANDARD

Improves Taste, Reduces Odor

CAUTION: **DO NOT** use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before the system.




Shown with system components

System Specifications

	Model Number	BPLRO-35
	Water Pressure - psig	40 - 100
	Water Pressure - kPa	280 - 690
	Water Temperature - °F	40 - 100
	Water Temperature - °C	4 - 38
	pH Operating Range	4 - 11
	Optimum rejection at pH	7.0 - 7.5
	Max T.D.S Level	2000 ppm
Chemical Limit *	Hardness	< 170 mg/l
Chemical Limit *	Iron	< 0.1 mg/l
Chemical Limit *	Manganese	< 0.05 mg/l
Chemical Limit *	Hydrogen Sulfide	0
	A measurement	14.5 in
	B measurement	12 in
	C measurement	5 in

*** IMPORTANT NOTE:**
Water supplies that exceed limits for Hardness, Iron, Manganese and Hydrogen Sulfide require pre-treatment.

System Dimensions

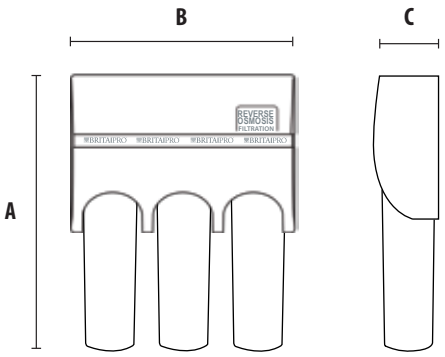

Replacements

50 GPD Membrane	BPS1448RS
Sediment/Carbon Pre-Filter	BPS7128
Activated Carbon Post Filter	BPS7125
Post-In-Line Filter	BPS7206WJG

BRITA | PRO