BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Point of Use

CATEGORY

Platinum Series / Single Stage

SYSTEM PARAMETERS

10” CTO
UNDER SINK FILTER
Reduces Sediment, Chlorine, Taste and Odor

Cl TARGETED CONTAMINANT
CHLORINE

PRODUCT FEATURES

- Combines advanced technology into a 1-stage filter
- Easy to install and saves space
- High-flow rate. Allows for use of existing faucet. 3/8” In/Out
- Easy to change filter
- Designed for easy installation, use and maintenance
- Environmentally friendly with landfill-safe certified filtration media
- Flush filter for 10 minutes
- BPUSF4001 filter cartridge and BPUSS4000 filter housing is certified by **IAPMO R&T against NSF/ANSI 42** for material safety requirement only

1 YEAR WARRANTY
WORKMANSHIP AND MATERIALS

UPC

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Point of Use

CATEGORY Platinum Series / Single Stage

SYSTEM PARAMETERS

10” CTO
UNDER SINK FILTER
Reduces Sediment, Chlorine, Taste and Odor

System Specifications


Filter Housing Model #	**BPUSS4000**
Replacement Filter Model #	**BPUSF4001**
Operating Temperature - Maximum	100° F / 38° C
Operating Temperature - Minimum	35° F / 1.7° C
Operating Water Pressure - Maximum	125 psi / 861.85 kpa
Operating Water Pressure - Minimum	10 psi / 69 kpa
Maximum Flow Rate	2.0 gpm / 7.57 lpm
Rated Capacity - Chlorine	7,900 gallons / 29,904 liters
Rated Capacity - Particulate (sediment)	7,900 gallons / 29,904 liters
NSF/ANSI 42 - Aesthetic Effects: Substance	**Chlorine**
Average Influent	2.01 mg/L
NSF/ANSI Influent Challenge Concentration	2.01 mg/L ± 10%
% Reduction Requirement/Max Permissible Product Water Concentration	≥ 50%
Average % Reduction	>94.8%
Average Product Water Concentration	0.103 mg/L
NSF/ANSI 42 - Aesthetic Effects: Substance	**Particulate**, Class I particles 0.5 to < 1 µm
Average Influent	3,666,667 particules / mL
NSF/ANSI Influent Challenge Concentration	At least 10,000 particles / mL
% Reduction Requirement/Max Permissible Product Water Concentration	≥ 85%
Average % Reduction	99.2%
Average Product Water Concentration	28,017 particles / mL

System Diagram

Part A:
System Head with Attached Bracket

Part B:
Replacement Filter

Part C:
Mounting Screws not shown (x3)

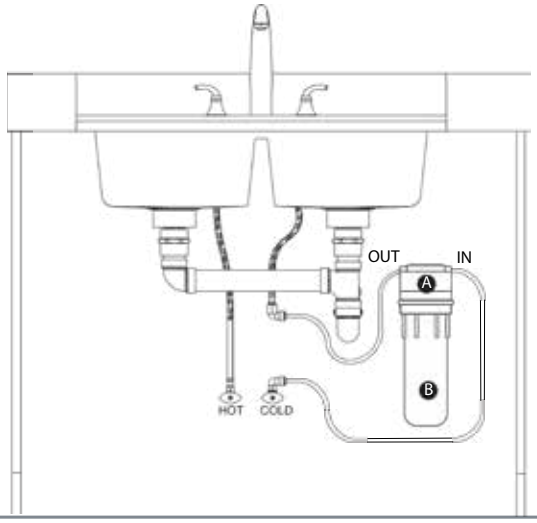

Recommended Replacement Parts and Change Interval

Depending on incoming feed water conditions replacement time frame may vary.

DESCRIPTION:	Filter
MODEL / PART #:	BPUSF4001
CHANGE TIME FRAME:	12 months or 3,000 gallons

The BPUSS4000 system has been tested according to **NSF/ANSI 42** and **53** for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in **NSF/ANSI 42** and **53** substantiated by test data. This system is certified to **NSF/ANSI standard 372** for ‘lead free’ compliance.

DIMENSIONS:	4.0 x 12.5
MICRON:	5
MAX FLOW RATE:	2.0 gpm
CAPACITY*:	3,000 at 5 gpm
PRESSURE DROP:	6.5 PSID

**claims of capacity and performance are based upon in house testing and independent laboratory results*

BRITA | PRO