BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023

ANTIMICROBIAL TECHNOLOGY

SYSTEM TYPE

Point of Use

CATEGORY

Platinum Series / Single Stage

SYSTEM PARAMETERS

14” PFAS
UNDER SINK FILTER
Reduces PFAS & Pharmaceuticals

PFAS TARGETED CONTAMINANT
PFAS

Rx TARGETED CONTAMINANT
PHARMACEUTICAL



PRODUCT FEATURES

- Combines advanced technology into a 1-stage filter
- Easy to install and saves space
- High-flow rate. Allows for use of existing faucet. 3/8” In/Out
- Easy to change filter
- Designed for easy installation, use and maintenance
- Environmentally friendly with landfill-safe certified filtration media
- Flush filter for 10 minutes

1 YEAR WARRANTY
WORKMANSHIP AND MATERIALS

UPC

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Point of Use

CATEGORY Platinum Series / Single Stage

SYSTEM PARAMETERS

14” PFAS
UNDER SINK FILTER
Reduces PFAS & Pharmaceuticals

System Specifications

Filter Housing Model #	**BPUSS4004**
Replacement Filter Model #	**BPUSF4004**
Operating Temperature - Maximum	100° F / 38° C
Operating Temperature - Minimum	35° F / 1.7° C
Operating Water Pressure - Maximum	125 psi / 861.85 kpa
Operating Water Pressure - Minimum	10 psi / 69 kpa
Maximum Flow Rate	1.8 gpm / 6.18 lpm
Rated Capacity - PFAS	IAMPO: 3,000 gal / Independent lab: 6,000 gal
Rated Capacity - Pharmaceuticals	IAMPO: 3,000 gal / Independent lab: 6,000 gal
NSF 401/Group 3/Contaminant: Bisphenol A	
% Reduction	>99.0%
Inlet Challenge	2000 ± 20%
Max Allowable Concentration	0.0003
NSF 401/Group 3/Contaminant: Estrone	
% Reduction	>96.6%
Inlet Challenge	140 ± 20%
Max Allowable Concentration	0.00002
NSF 401/Group 3/Contaminant: Ibuprofen	
% Reduction	>95.1%
Inlet Challenge	400 ± 20%
Max Allowable Concentration	0.00006
NSF 401/Group 3/Contaminant: Naproxen	
% Reduction	>96.4%
Inlet Challenge	140 ± 20%
Max Allowable Concentration	0.00002
NSF 401/Group 3/Contaminant: Nonylphenol	
% Reduction	>95.6%
Inlet Challenge	1400 ± 20%
Max Allowable Concentration	0.0002
NSF 401/Group 3/Contaminant: Phenytoin	
% Reduction	>95.4%
Inlet Challenge	200 ± 20%
Max Allowable Concentration	0.00003
NSF 53/Contaminant: PFOA/PFOS	
% Reduction	>95.5%
Inlet Challenge	0.0015 ± 10%
Max Allowable Concentration	0.0001

System to be used with municipal or well water sources treated and tested on regular basis to insure bacteriological safe quality. **DO NOT** use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. While testing was performed under standard laboratory conditions, actual performance may vary.

Recommended Replacement Parts and Change Interval

Depending on incoming feed water conditions replacement time frame may vary.

DESCRIPTION:	Filter
MODEL / PART #:	BPUSF4004
CHANGE TIME FRAME:	12 months or 3,000 gallons

The BPUSS4004 system has been tested according to **NSF/ANSI 42, 53** and **401** for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in **NSF/ANSI 42, 53** and **401** substantiated by test data. This system is certified to **NSF/ANSI standard 372** for ‘lead free’ compliance.

DIMENSIONS:	4.0 x 12.5
MICRON:	.5
MAX FLOW RATE:	1.8 gpm
CAPACITY*:	3,000 at 5 gpm
PRESSURE DROP:	6.5 PSID


**claims of capacity and performance are based upon in house testing and independent laboratory results*

System Diagram

Part A:
System Head with Attached Bracket

Part B:
Replacement Filter

Part C:
Mounting Screws not shown (x3)

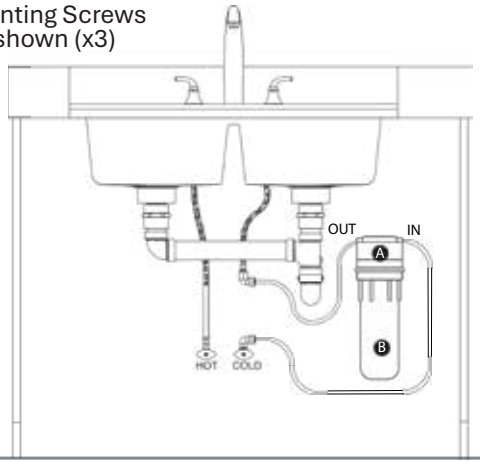

BRITA | PRO