# BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023

## SYSTEM TYPE

**Point of Use**

## CATEGORY

**Platinum Series / Single Stage**

## SYSTEM PARAMETERS

**MICROBIOLOGICAL PURIFIER**
**Reduces PFAS, Viruses, Cysts, VOCs, Pharmaceuticals, Lead & Bacteria**

Pb TARGETED CONTAMINANT — LEAD
PFAS TARGETED CONTAMINANT — PFAS
VOC TARGETED CONTAMINANT — VOCs
Rx TARGETED CONTAMINANT — PHARMACEUTICAL

MICROBIOLOGICAL TECHNOLOGY




## PRODUCT FEATURES

- **EPA P 231** certified system
- Removes 99.999% of viruses, cysts and bacteria
- Reduces heavy metals including lead, VOCs, pharmaceuticals, and PFOA/PFOS while providing great flow rates
- Combines advanced technology into a 1-stage filter
- Easy to install and saves space
- High-flow rate. Allows for use of existing faucet. 3/8” In/Out
- Easy to change filter
- Designed for easy installation, use and maintenance
- Environmentally friendly with landfill-safe certified filtration media
- Flush filter for 10 minutes

1 YEAR WARRANTY
WORKMANSHIP AND MATERIALS

UPC

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

# PRODUCT SPECIFICATIONS

**SYSTEM TYPE** Point of Use

**CATEGORY** Platinum Series / Single Stage

**SYSTEM PARAMETERS**

**MICROBIOLOGICAL PURIFIER**

**Reduces PFAS, Viruses, Cysts, VOCs, Pharmaceuticals, Lead & Bacteria**

## System Specifications

| | |
|---|---|
| Filter Housing Model # | **BPUSS4005** |
| Replacement Filter Model # | **BPUSF4005** |
| Operating Temperature - Maximum | 100° F / 38° C |
| Operating Temperature - Minimum | 35° F / 1.7° C |
| Operating Water Pressure - Maximum | 100 psi / 689.47 kpa |
| Operating Water Pressure - Minimum | 10 psi / 69 kpa |
| Maximum Flow Rate | 1.6 gpm / 6.056 lpm |
| Rated Capacity | IAMPO: 3,000 gal / Independent lab: 6,000 gal |


System to be used with municipal or well water sources treated and tested on regular basis to insure bacteriological safe quality. **DO NOT** use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. While testing was performed under standard laboratory conditions, actual performance may vary.

## System Diagram

**Part A:**
System Head with Attached Bracket

**Part B:**
Replacement Filter

**Part C:**
Mounting Screws
not shown (x7)

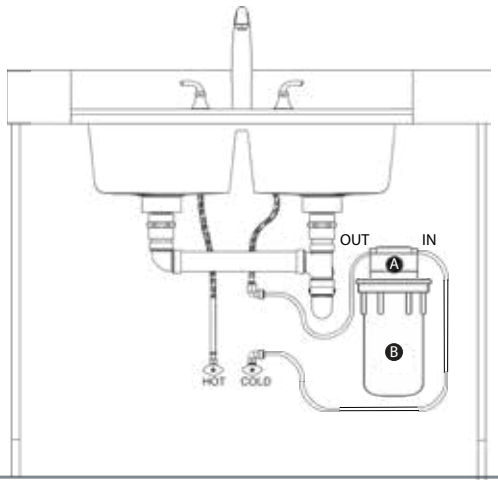


## Recommended Replacement Parts and Change Interval

Depending on incoming feed water conditions replacement time frame may vary.

| | |
|---|---|
| DESCRIPTION: | Filter |
| MODEL / PART #: | BPUSF4005 |
| CHANGE TIME FRAME: | 12 months or 3,000 gallons |

The BPUSS4005 system has been tested according to **NSF/ANSI 42, 53, 401, P231, P473** and **P477** for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in **NSF/ANSI 42, 53, 401, P231, P473** and **P477** substantiated by test data. This system is certified to **NSF/ANSI standard 372** for 'lead free' compliance.

| | |
|---|---|
| DIMENSIONS: | 4.0 x 12.5 |
| MICRON: | .5 |
| MAX FLOW RATE: | 1.8 gpm |
| CAPACITY*: | 3,000 at 5 gpm |
| PRESSURE DROP: | 6.5 PSID |

**claims of capacity and performance are based upon in house testing and independent laboratory results*



BRITA | PRO

# PRODUCT SPECIFICATIONS

**SYSTEM TYPE** Point of Use

**CATEGORY** Platinum Series / Single Stage

**SYSTEM PARAMETERS**

**MICROBIOLOGICAL PURIFIER**

**Reduces PFAS, Viruses, Cysts, VOCs, Pharmaceuticals, Lead & Bacteria**

## Brita PRO® NSF Performance Data

Brita PRO products are tested and verified to NSF/ANSI standards. The standard(s) tested and certified for each product is identified on all performance data sheets and manuals. Test data certified by IAPMO R&T.

### NSF/ANSI 42 - Aesthetic Effects

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| CHLORAMINE | >97.5% | 3.0 +/- 10% | 0.5 |
| CHLORINE | >97.5% | 2.0 ± 10% | ≥ 50% |
| Particulate Class I | 99.8% | min. 10,000 particles/mL | ≥ 85% |

### NSF/ANSI 53 - Health Effects

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| ALACHLOR | >98% | 0.050 | 0.001 |
| ARSENIC (pH 6.5) | >97.9% | 0.050 ± 10% | 0.010 |
| ARSENIC (pH 8.5) | 97.6% | 0.050 ± 10% | 0.010 |
| ASBESTOS | >99% | $10^7$to $10^8$filbers/L | 99% |
| ATRAZINE | >97% | 0.100 | 0.003 |
| BENZENE | >99% | 0.081 | 0.001 |
| BROMODICHLOROMETHANE (TTHM) | >99.8% | 0.300 | 0.015 |
| BROMOFORM (TTHM) | >99.8% | 0.300 | 0.015 |
| CARBOFURAN (Furadan) | >99% | 0.19 | 0.001 |
| CARBON TETRACHLORIDE | 98% | 0.078 | 0.0018 |
| CHLORDANE | >99.5% | 0.040 ± 10% | 0.002 |
| CHLOROBENZENE (Monochlorobenzene) | >99% | 0.077 | 0.001 |
| CHLOROPICRIN | 99% | 0.015 | 0.0002 |
| CHLOROFORM (TTHM) (surrogate chemical) | >99.8% | 0.300 | 0.015 |
| Cryptosporidium (CYST) | 99.95% | minimum 50,000/L | 99.95% reduction requirement |
| CYST | 99.99% | min. 50,000/L | 99.95% |
| 2, 4-D | 98% | 0.110 | 0.0017 |
| DBCP (see Dibromochloropropane) | >99% | 0.052 | 0.00002 |
| 1,2-DCA (see 1,2-DICHLOROETHANE) | 95% | 0.088 | 0.0048 |
| 1,1-DCE (see 1,1-DICHLOROETHYLENE) | >99% | 0.083 | 0.001 |



BRITA | PRO

# PRODUCT SPECIFICATIONS

**SYSTEM TYPE** Point of Use

**CATEGORY** Platinum Series / Single Stage

## SYSTEM PARAMETERS

**MICROBIOLOGICAL PURIFIER**

**Reduces PFAS, Viruses, Cysts, VOCs, Pharmaceuticals, Lead & Bacteria**

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration |
|---|---|---|---|
| DIBROMOCHLOROMETHANE | >99.8% | 0.300 | 0.015 |
| DIBROMOCHLOROPROPANE (DBCP) | >99% | 0.052 | 0.00002 |
| o-DICHLOROBENZENE (1,2 Dichlorobenzene) | >99% | 0.080 | 0.001 |
| p-DICHLOROBENZENE (para-Dichlorobenzene) | >98% | 0.040 | 0.001 |
| 1,2-DICHLOROETHANE (1,2-DCA) | 95% | 0.088 | 0.0048 |
| 1,1-DICHLOROETHYLENE (1,1-DCE) | >99% | 0.083 | 0.001 |
| CIS-1,2-DICHLOROETHYLENE | >99% | 0.170 | 0.0005 |
| TRANS-1,2- DICHLOROETHYLENE | >99% | 0.086 | 0.001 |
| 1,2-DICHLOROPROPANE | >99% | 0.080 | 0.001 |
| CIS-1,3- DICHLOROPROPYLENE | >99% | 0.079 | 0.001 |
| DINOSEB | 99% | 0.170 | 0.0002 |
| EDB (see ETHYLENE DIBROMIDE) | >99% | 0.044 | 0.00002 |
| ENDRIN | 99% | 0.053 | 0.00059 |
| Entamoeba (see CYSTS) | 99.95% | minimum 50,000/L | 99.95% reduction requirement |
| ETHYLBENZENE | >99% | 0.088 | 0.001 |
| ETHYLENE DIBROMIDE (EDB) | >99% | 0.044 | 0.00002 |
| Furadan (see CARBOFURAN) | >99% | 0.19 | 0.001 |
| Giardia Lamblia (see CYST) | >99.95% | minimum 50,000/L | 99.95% reduction requirement |
| HALOACETONITRILES (HAN) | | | |
| BROMOCHLOROACETONITRILE | 98% | 0.022 | 0.0005 |
| DIBROMOACETONITRILE | 98% | 0.024 | 0.0006 |
| DICHLOROACETONITRILE | 98% | 0.0096 | 0.0002 |
| TRICHLOROACETONITRILE | 98% | 0.015 | 0.0003 |
| HALOKETONES (HK): | | | |
| 1,1-DICHLORO-2-PROPANONE | 99% | 0.0072 | 0.0001 |
| 1,1,1-TRICHLORO-2-PROPANONE | 96% | 0.0082 | 0.0003 |
| HEPTACHLOR | >99% | 0.25 | 0.00001 |
| HEPTACHLOR EPOXIDE | 98% | 0.0107 | 0.0002 |
| HEXACHLOROBUTADIENE | >98% | 0.044 | 0.001 |
| HEXACHLOROCYCLOPENTADIENE | >99% | 0.060 | 0.000002 |
| LEAD (pH 6.5) | >99.3% | 0.15 ± 10% | 0.010 |
| LEAD (pH 8.5) | >99.3% | 0.15 ± 10% | 0.010 |
| LINDANE | >99% | 0.055 | 0.00001 |
| MERCURY (pH 6.5) | >96.6% | 0.006 ± 10% | 0.002 |
| MERCURY (pH 8.5) | >96.7% | 0.006 ± 10% | 0.002 |
| METHOXYCHLOR | >99% | 0.050 | 0.0001 |
| Methylbenzene (see TOLUENE) | >99% | 0.078 | 0.001 |
| Monochlorobenzene (see CHLOROBENZENE) | >99% | 0.077 | 0.001 |
| MTBE (methyl tert-butyl ether) | 97% | 0.015 ± 20% | 0.005 |
| POLYCHLORINATED BIPHENYLS (PCBs , Aroclor 1260) | >99.9% | 0.01 +/- 10% | 0.0005 |
| PCB | >97% | 0.01 ± 10% | 0.0005 |
| PCE (see TETRACHLOROETHYLENE) | >99% | 0.081 | 0.001 |
| PENTACHLOROPHENOL | >99% | 0.096 | 0.001 |
| Perchlorobutadiene (see HEXACHLOROBUTADIENE) | >98% | 0.044 | 0.001 |
| Propylene Dichloride (see 1,2 -DICHLOROPROPANE) | >99% | 0.080 | 0.001 |
| RADON | 95% | 4000 ± 1000 pCi/L | 300 pCi/L |
| SIMAZINE | >97% | 0.120 | 0.004 |
| Silvex (see 2,4,5-TP) | 99% | 0.270 | 0.0016 |



BRITA | PRO

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| STYRENE (Vinylbenzene) | >99% | 0.150 | 0.0005 |
| 1,1,1-TCA (see 1,1,1 - TRICHLOROETHANE) | 95% | 0.084 | 0.0046 |
| TCE (see TRICHLOROETHYLENE) | >99% | 0.180 | 0.0010 |
| 1,1,2,2- TETRACHLOROETHANE | >99% | 0.081 | 0.001 |
| TETRACHLOROETHYLENE | >99% | 0.081 | 0.001 |
| TOLUENE (Methylbenzene) | >99% | 0.078 | 0.001 |
| TOXAPHENE | >95% | 0.015 ± 10% | 0.003 |
| Toxoplasma (see CYSTS) | 99.95% | minimum 50,000/L | 99.95% reduction requirement |
| 2,4,5-TP (Silvex) | 99% | 0.270 | 0.0016 |
| TRIBROMOACETIC ACID | >99% | 0.042 | 0.001 |
| 1,2,4 TRICHLOROBENZENE (Unsymtrichlorobenzene) | >99% | 0.160 | 0.0005 |
| 1,1,1-TRICHLOROETHANE (1,1,1-TCA) | 95% | 0.084 | 0.0046 |
| 1,1,2-TRICHLOROETHANE | >99% | 0.150 | 0.0005 |
| TRICHLOROETHYLENE (TCE) | >99% | 0.180 | 0.0010 |
| TRIHALOMETHANES (TTHM) (Chloroform; Bromoform; Bromodichloromethane; Dibromochloromethane) | >99.8% | 0.300 | 0.015 |
| TURBIDITY | 99.0% | 11 ± 1 NTU | 0.5 NTU |
| Unsym-Trichlorobenzene | >99% | 0.160 | 0.0005 |
| Vinylbenzene (see STYRENE) | >99% | 0.150 | 0.0005 |
| XYLENES (TOTAL) | >99% | 0.070 | 0.001 |

## Standard 401 - Emerging Contaminants

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| Group I | | | |
| Atenolol | >96.4% | 200 ± 20% | 0.00003 |
| Carbamazepine | >98.5% | 1400 ± 20% | 0.0002 |
| DEET | >98.6% | 1401 ± 20% | 0.0002 |
| Linuron | >96.5% | 140 ± 20% | 0.00002 |
| Meprobamate | >95.3% | 400 ± 20% | 0.00006 |
| Metolachlor | >98.7% | 1400 ± 20% | 0.0002 |
| Trimethoprim | >96.8% | 140 ± 20% | 0.00002 |
| Group II | | | |
| TCEP (Group 2) | >98.0% | 5000 ± 20% | 0.0007 |
| TCPP (Group 2) | >97.9% | 5000 ± 20% | 0.0007 |
| Group III | | | |
| Bisphenol A (Group 3) | >99.0% | 2000 ± 20% | 0.0003 |
| Estrone (Group 3) | >96.6% | 140 ± 20% | 0.00002 |
| Ibuprofen (Group3) | >95.1% | 400 ± 20% | 0.00006 |
| Naproxen (Group 3) | >96.4% | 140 ± 20% | 0.00002 |
| Nonyl phenol (Group 3) | >95.6% | 1400 ± 20% | 0.0002 |
| Phenytoin (Group 3) | >95.4% | 200 ± 20% | 0.00003 |

# PRODUCT SPECIFICATIONS

**SYSTEM TYPE** Point of Use

**CATEGORY** Platinum Series / Single Stage

**SYSTEM PARAMETERS**

**MICROBIOLOGICAL PURIFIER**

**Reduces PFAS, Viruses, Cysts, VOCs, Pharmaceuticals, Lead & Bacteria**

## NSF/ANSI Protocol P231 - Viruses & Bacteria

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| Bacteria, R. Terringena (ATCC-33257) | ≥ 99.9999% | 2.8 x 107/100 mL | |
| Virus, MS2 (ATCC-15597-B1) | ≥ 99.99% | 4.3 x $10^4$/mL | |

## NSF Protocol P473 - PFOA/PFOS

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| PFOA/PFOS | >99.5% | 0.0015 ± 10%*** | 0.00007 |

## NSF Protocol P477 - Microcystin

| Contaminant | Percent Reduction | Influent challenge concentration (mg/L unless specified) | Maximum permissible product water concentration (mg/L unless specified) |
|---|---|---|---|
| Microcystin | 99.5% | 0.004 ± 10% | 0.0003 |



BRITA | PRO