BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023

SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / UV

SYSTEM PARAMETERS

ULTRAVIOLET WATER PURIFIER
High-Intensity Ultraviolet Bulb &
Core Chamber Technology



PRODUCT FEATURES

- Neutralizes harmful bacteria that can create waterborne illnesses within your home
- Handles both municipal and well water applications
- UV rays penetrate bacteria, disinfecting your water while inactivating 99.99% of harmful microorganisms
- Unlike chlorine, UV does not alter the taste or odor of water and will not impart any toxic by-products
- Ultraviolet (UV) technology is more effective than chemicals in destroying certain waterborne contaminants without altering the taste of water
- Designed to the highest standards in the industry
- Treating your water supply with the use of UV disinfection is not only more effective than traditional treatments, but it is also an environmentally responsible way of treating your water

7 YEAR WARRANTY

DISINFECTION CHAMBER

UPC

CHEMICAL-FREE DISINFECTION

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / UV

SYSTEM PARAMETERS

ULTRAVIOLET WATER PURIFIER

High-Intensity Ultraviolet Bulb &
Core Chamber Technology

System Specifications

Model Number	BPUV009	BPUV016	BPUV030
Flow Rate [1]: US Public Health (16mJ/cm²)	17 gpm	35 gpm	55 gpm
Flow Rate [1]: Industry Standard (30mJ/cm²)	9 gpm	16 gpm	30 gpm
Flow Rate [1]: NSF/EPA (40mJ/cm²)	7 gpm	14 gpm	22 gpm
Electrical Voltage [2]	110V to 240V AC 50/60 Hz	110V to 240V AC 50/60 Hz	110V to 240V AC 50/60 Hz
Power Consumption	34 W	50 W	90 W
Lamp Watts	29 W	45 W	80 W
Inlet/Outlet Port Size	1.0" MNPT	1.0" MNPT	1.5" MNPT
Number of Lamps	1	1	1
Maximum Lamp Hours	9000	9000	9000
Ship Weight (lb)	8.2	10.5	14.5
Vessel Height (in)	17.38	25.63	39.75
Vessel Depth (in)	3.5	3.5	3.5
Maximum Operating Pressure	125 PSI	125 PSI	125 PSI
Pressure Drop at 30mJ/cm² Rated Flow	Less than 1 PSI	Less than 1 PSI	Less than 1 PSI
Ambient Air & Water Temperature	36° - 104° F	36° - 104° F	36° - 104° F
Lamp Type	LPHO (low pressure high output)	LPHO (low pressure high output)	LPHO (low pressure high output)
Chamber Material	304 SS	304 SS	304 SS

[1] At flow rates stated, the corresponding fluence (UV dose) levels are theoretically met or exceeded at 95% UVT and EOL (end of lamp life; 1 year). UVCalc®, developed by Bolton Photosciences Inc., is based on calculations of fluence rates (irradiances) using the multiple point source summation approximation with full accommodation of reflection and refraction occurring at the air/quartz/water interface and is the only mathematical fluence rate model that has been experimentally verified.

[2] Models are supplied with a 5 ft power cordset for 120V AC 60 Hz (NEMA 5-15P plug to IEC 60320/C13 connector).

System Monitoring & Indicators

Lamp-On Indicator	Steady "WORK" green LED
Lamp Life Remaining (Days)	Visual count down display (365-0). Manual reset function
Lamp Replacement Reminder	Visual display (A3), "FAULT" red LED flashes and audible alarm sounds intermittently (1 second beep every 5 seconds)
Lamp Replacement Reminder Delay	Silences audible alarm for 7 days, repeatable up to 4 times (28 days maximum)
Lamp Failure Indicator	Lamp life remaining (days) continues to be displayed but stops counting down. "FAULT" red LED flashes and audible alarm sounds intermittently (1 second beep every 1 second)
Ballast Total Running Days	Visual incremental display (0-9999). Cannot be reset
Ballast Failure Indicator	Blank display

BRITA | PRO

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House


CATEGORY Platinum Series / UV

SYSTEM PARAMETERS


ULTRAVIOLET WATER PURIFIER

High-Intensity Ultraviolet Bulb &
Core Chamber Technology

Parts List

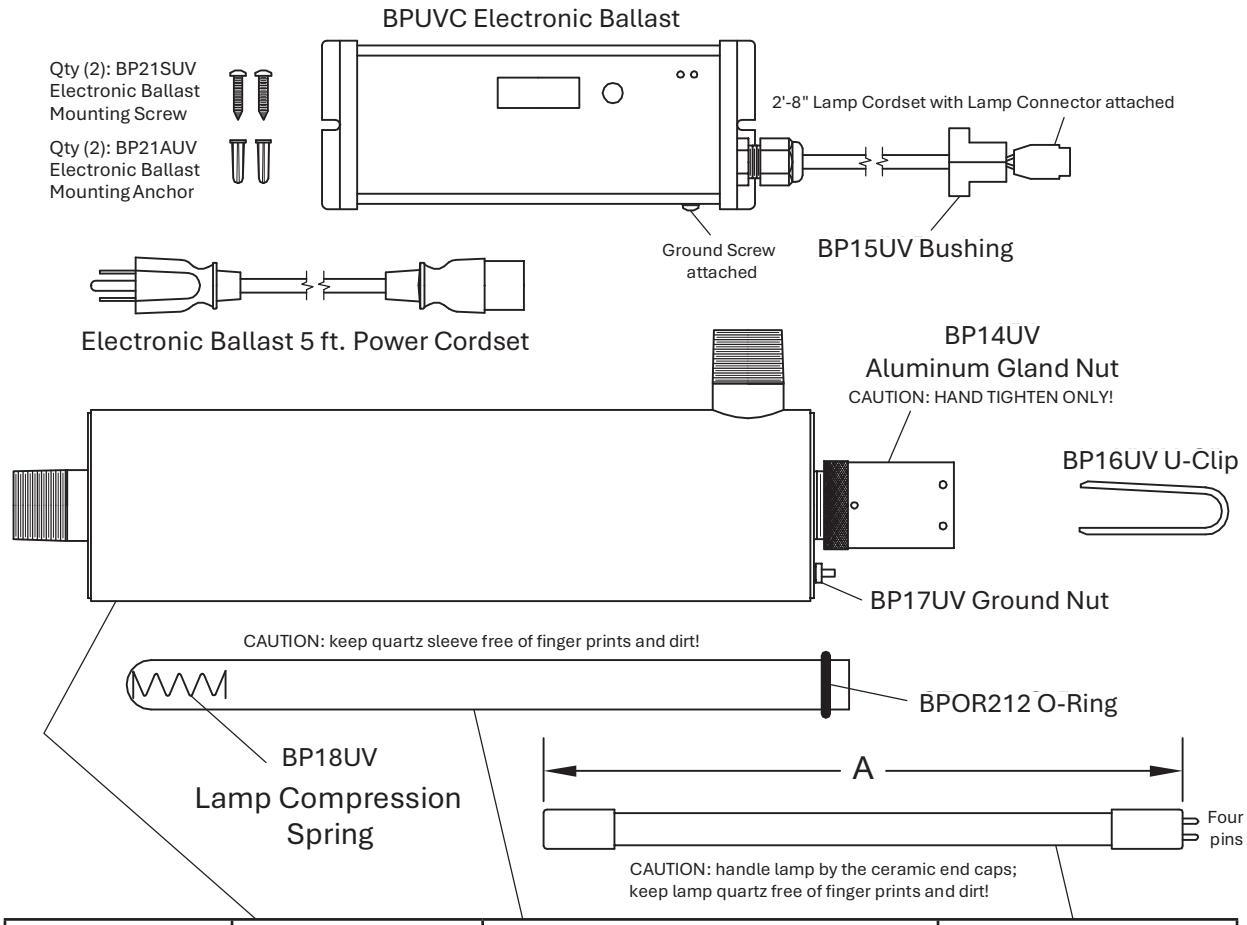

Model	SS UV Chamber	Domed Quartz Sleeve (length)	UV Lamp (A)
BPUV009	BP100UV	BPQ6 (13-1/8”)	BPL6 (11-13/16”)
BPUV016	BP200UV	BPQ10 (21-3/8”)	BPL10 (20-1/16”)
BPUV030	BP300UV	BPQ20 (34-3/4”)	BPQ20 (33-3/16”)

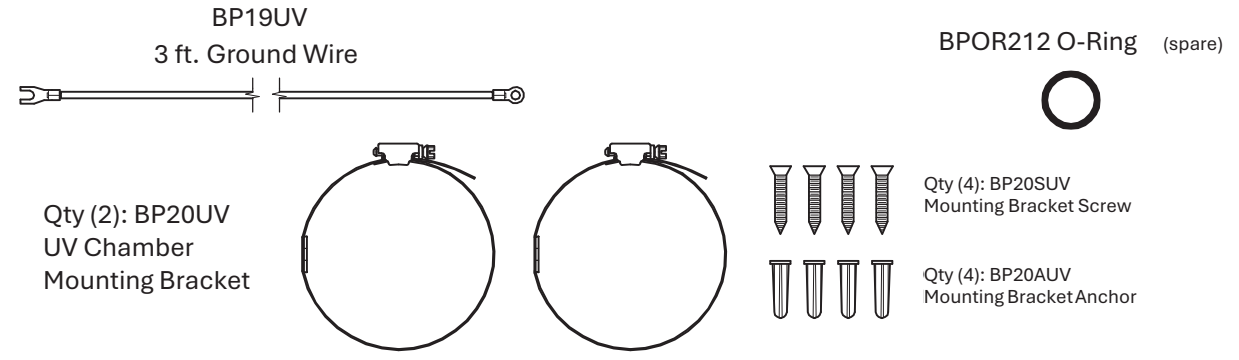

BRITA | PRO