BRITA | PRO®

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Filtration

SYSTEM PARAMETERS

HYDRA BIG Filtration System
Heavy Sediment Reduction + High Volume
Self-Cleaning Technology

PRODUCT FEATURES

The HYDRA BIG Filtration System is engineered for whole-house applications, delivering powerful sediment reduction with a patented self-cleaning design. Ideal for residential, well water, irrigation, and light commercial use, this system efficiently removes large particles while maintaining high flow performance.

HOW IT WORKS

The HYDRA BIG utilizes an innovative self-cleaning mechanism which helps extend filter life and maintain consistent performance.

- Opening the bottom ball valve activates a backwash cycle
- Water is redirected from the center of the cartridge outward
- Sediment is flushed from the filter surface to drain
- Closing the valve returns the system to normal filtration mode

KEY FEATURES

- Designed for residential, well, irrigation, and light commercial applications
- Patented self-cleaning filtration technology
- Proprietary stainless steel filter cartridge (90-micron)
- High flow rate performance up to 26 GPM
- 1” FNPT inlet and outlet connections
- Lead-free brass inserts
- Integrated pressure-relief feature with O-ring seal (no spring mechanism)
- Knife-edge seal design eliminates bypass
- Engineered for high sediment loads and large particle reduction

CERTIFICATIONS

- Certified by IAPMO R&T to **NSF/ANSI Standard 42**
- Certified by IAPMO R&T to **NSF/ANSI Standard 61**
- Certified by IAPMO R&T to **NSF/ANSI Standard 372**
- Certified by IAPMO R&T to **CSA B483.1**

Ensuring compliance with material safety, structural integrity, and lead-free requirements.

The BRITA | PRO™ trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights reserved.

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Filtration

SYSTEM PARAMETERS

HYDRA BIG Filtration System


Heavy Sediment Reduction + High Volume

Self-Cleaning Technology

Important Information

- Designed for large sediment and particulate reduction only
- Not intended for microbiological purification
- Routine flushing recommended to maintain optimal performance

Dimensions

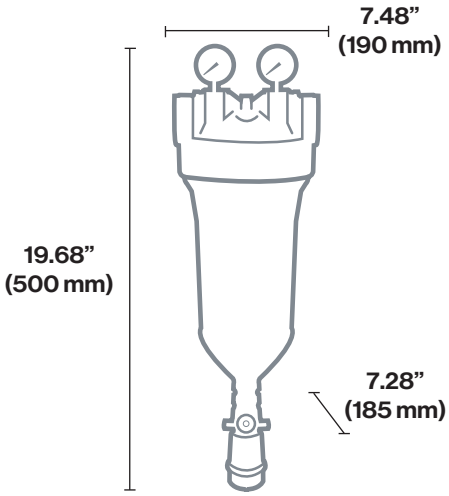

System Specifications

Part Number	BPSC-SSBIG6030
Model	HYDRA BIG 1” RLH 90 mcr NPT OT
Nominal Filtration	90 Micron
Connection Size	1” FNPT
Max Flow Rate	26 GPM (6000 L/h)
Head	Reinforced Polypropylene
Housing (Sump)	PET
Filter Construction	Polypropylene
Filter Media	Stainless Steel
Seal	Silicone O-ring
MIN Temperature	39.2°F (4°C)
MAX Temperature	113°F (45°C)
MIN Pressure	26 PSI (1.8 BAR)
MAX Pressure	120 PSI (8.3 BAR)
Minimum Flow Rate	8.8 GPM

Filter Cartridge

Type	RAH Stainless Steel
Micron Rating	90 Micron
Cartridge Model	RA5001020

BRITA | PRO