BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Filtration

SYSTEM PARAMETERS

HYDRA Standard Filtration System
Everyday Sediment Reduction
Back-Wash Technology

PRODUCT FEATURES

The HYDRA Self-Cleaning Filter System delivers advanced sediment filtration using a specialty-designed back-wash process. Engineered for residential, commercial, and industrial applications, HYDRA systems effectively remove sediment while maintaining high flow rates and long-lasting performance.

HOW IT WORKS

HYDRA utilizes an automatic back-wash cleaning process. This self-cleaning design helps extend filter life and maintain consistent efficiency.

- Opening the drain valve activates the back-wash cycle
- Water flows from the center of the cartridge outward
- Sediment is flushed off the filter surface and discharged through the drain
- System returns to filtration mode once the valve is closed

KEY FEATURES

- Specialty self-cleaning back-wash filtration system
- Designed for point-of-entry and heavy sediment applications
- Suitable for residential, commercial, and industrial use
- Proprietary 90-micron stainless steel filter cartridge
- High flow rate up to 27 GPM
- 1” NPT inlet and outlet connections
- Pressure rating up to 125 PSI
- Integrated pressure relief with O-ring design (eliminates spring-related leaks)
- Includes drain kit with ball valve, hose connection, and code-compliant air gap

CERTIFICATIONS

- Certified by IAPMO R&T to **NSF/ANSI Standard 42**
- Certified by IAPMO R&T to **NSF/ANSI Standard 61**
- Certified by IAPMO R&T to **NSF/ANSI Standard 372**
- Certified by IAPMO R&T to **CSA B483.1**

Ensuring compliance with material safety, structural integrity, and lead-free requirements.

The BRITA | PRO™ trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights reserved.

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Filtration


SYSTEM PARAMETERS

HYDRA Standard Filtration System
Everyday Sediment Reduction
Back-Wash Technology

Important Information

- Designed for sediment reduction only
- Not intended for microbiological purification
- Routine back-washing flushing recommended for optimal performance

Dimensions

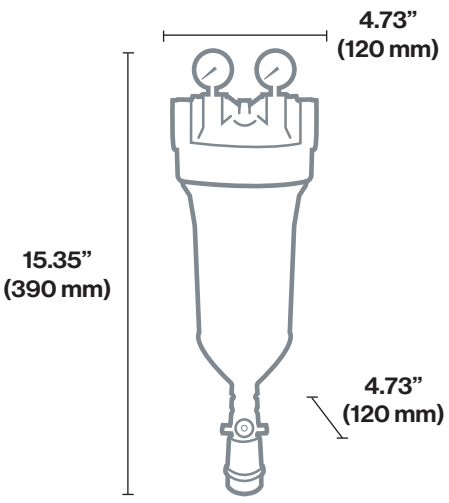

System Specifications

Part Number	BPSC-SS0056
Model	HYDRA 1” RAH 90 mcr IN NPT
Connection Size	1” NPT
Filtration Rating	90 Micron
Filter Material	Stainless Steel
Flow Rate	27 GPM (100 LPM)
Pressure Drop	2.61 PSI @ 27 GPM (0.18 BAR @ 100 LPM)
Blue Head	Reinforced Polypropylene
Clear Sump	PET
O-Rings	EPDM
Filter Cartridge	Stainless steel mesh (90 micron)
Maximum Pressure	125 PSI (8.6 BAR)
Temperature Range	39.2°F – 113°F (4°C – 45°C)
Accessories	
RB7403017	X-Type Wrench (Black)
RB7400007	Single Wall Bracket (Blue)
RB7400017	Double Wall Bracket (Blue)
RB7400019	Triple Wall Bracket (Blue)
LB7221129	Drain Kit
RB7404010	Gauge Kit (2 gauges, 0–174 PSI / 0–12 BAR)

BRITA | PRO