BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Filtration

SYSTEM PARAMETERS

AERATION
Reduces Hydrogen Sulfide Gas, Iron, Manganese

Fe TARGETED CONTAMINANT
IRON

PRODUCT FEATURES

- Reduces hydrogen sulfide gas, iron and manganese without the use of chemicals
- Filters all household water at the point of entry
- Treats water to protect pipes, faucets, water heaters, boilers and all appliances requiring the use of water
- Flow rates that won't disrupt household water pressure
- Simple and easy to run with high-efficiency operation
- Simplified single-tank installation
- State-of-the-art control valve
- For hydrogen sulfide, higher levels of iron, manganese and sediment
- This unique light weight, high surface area filtration media utilizes a high concentration MnO2 catalytic coating technique. It provides higher filtration rates, longer service life and reliable performance without producing a disinfection by-product.
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 42**
- Made in an IAPMO-certified manufacturing plant.

10 Year Warranty
CONTROL VALVE

Limited Lifetime Warranty
Excellent Quality
PRESSURE TANK

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Filtration

SYSTEM PARAMETERS

AERATION

Reduces Hydrogen Sulfide Gas, Iron, Manganese

About

Engineered to utilize aeration, oxidation, and mechanical filtration to remove hydrogen sulfide, higher levels of iron, manganese, and sediment without the use of salt and chemicals.

Influent Limitations


- Hydrogen Sulfide up to 5 ppm
- Iron up to 6 ppm
- Manganese up to 1 ppm
- High concentration of contaminant may require upstream dosing of H2O2, KMnO4 or chlorine to accelerate catalytic oxidation
- DO NOT install on water supplies containing organic matter (Tannins)

Recommended pH Ranges

Effective with pH as low as 5.8.

Removing Iron - recommend pH 7.5 or higher but below 8.5


Manganese - recommend pH 8.5 but below 8.5 if Iron is present

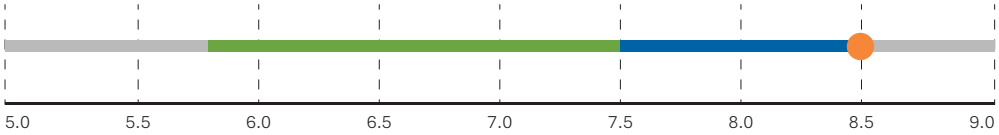

Stipulations

- Katalox Light service flow rates based on Continuous (5 GPM/sq.ft.) to Intermittent (Peak) (10 GPM/sq.ft.)
- Backwash flow rates based on DLFC sizes to meet approximately 10 GPM/sq.ft.
- Lower service flow rates are recommended for increased contact time to produce higher quality water. Higher flow rates are possible, however, filtration quality may be compromised.
- Optional ozone generator available upon request
- Well pump capacity must be equal to or greater than the required backwash flow rate to assure proper backwash. If the well pump cannot provide the required backwash flow rate, consider two smaller filters, parallel installation with offset backwash times.

System Specifications

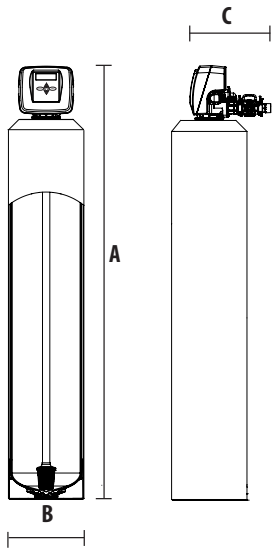

Model Number	BP1KATAIR1J
Mineral (cubic feet)	Katalox Light (1.0)
Service Flow GPM (1,2,3)	2.7 to 4.6
Backwash GPM (4,5)	5.3
Mineral Tank - A measurement	54 in
Mineral Tank - B measurement	10 in
Mineral Tank - C measurement	16.5 in

BRITA | PRO