BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Softener

SYSTEM PARAMETERS

Softener + Iron Filtration
Reduces Hardness, Iron and Manganese

IRON

PRODUCT FEATURES

- Softens water and removes unwanted iron and manganese
- Softens water and removes up to 10 ppm of ferrous or ferric iron
- Hybrid regeneration for efficiency and improved water quality
- Intuitive profile - learns softening capacity based on usage profile
- Quick-connect fittings (includes straight and 90-degree elbow connectors)
- Customized to your individual needs, including household size and plumbing
- Provides high-capacity flow for reliable access to high-quality water
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 42**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 44**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 61**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 372**
- Made in an IAPMO-certified manufacturing plant

7 YEAR WARRANTY
CONTROL VALVE

Limited Lifetime WARRANTY
PRESSURE TANK

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House
CATEGORY Platinum Series / Softener

SYSTEM PARAMETERS
Softener + Iron Filtration
Reduces Hardness, Iron and Manganese

Programming & Control

- Fully customizable programming (including times and cycle order)
- Easy contractor set-up
- Program time of day and hardness
- Days override feature (1-28 days)
- Service Technician “Step-Through” Regeneration
- Multiple regenerations per day
- Treated water brine refill
- Factory-set pre-fill brine
- Optional Air Release Cycle

Display & Diagnostics

- Digital display screen
- Color-specific displays
- Scrolling Text Display
- Water drop flow indicator
- Programmable contractor contact screen
- 62-day diagnostic information:
  - > Flow rates
  - > Gallons since regeneration
  - > Days since regeneration
  - > Total regenerations since startup
  - > Peak flow rates
  - > Days until next regeneration


Memory & Alerts

- Low battery warning
- Battery back-up with up to 8 hrs of power carry-over
- Stores system configuration & operation data in nonvolatile memory
- Service Call Reminder (not programmed from factory)

System Features

- External accessory operation
- Valve internally ported in 1 inch

System Dimensions

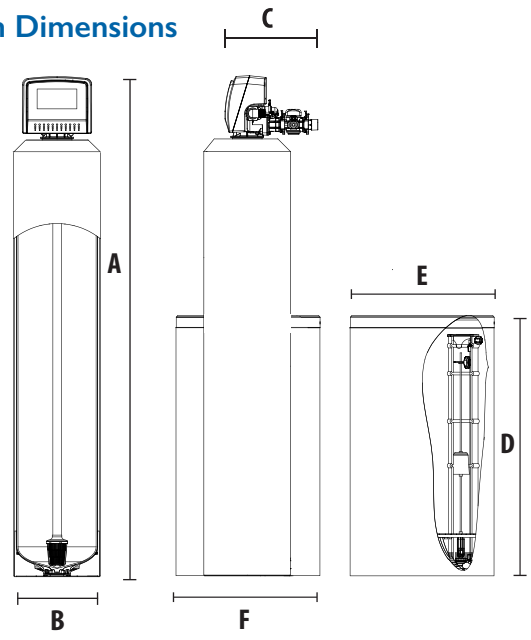

BRITA | PRO

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House
CATEGORY Platinum Series / Softener

SYSTEM PARAMETERS
Softener + Iron Filtration
Reduces Hardness, Iron and Manganese

System Specifications

Part Number	BPFES100J	BPFES150	BPFES200
Salt Used - Per Regeneration (lb)	15	22	30
Regeneration Programing	Pre-Fill Brine	Pre-Fill Brine	Pre-Fill Brine
Grains Capacity	32,000	45,000	60,000
Resin Quantity (FT3)	1	1 1/2	2
Mineral Tank (in)	10 x 54	12 x 52	13 x 54
Tank Jacket	YES	NO	NO
Media Loaded	YES	NO	NO
Brine Tank Size (in)	15 x 36	15 x 36	15 x 36
Salt Storage Capacity	275	275	275
Service Flow Rate	13	14	16
Pipe Size (in)	1	1	1
Min-Max Pressure (psi)	20 - 100	20 - 100	20 - 100
Min-Max Temperature (°F)	35 - 100	35 - 100	35 - 100
Backwash GPM	1.7	1.7	1.7
Plumbing Connections	1 inch Male NPT Elbow	1 inch Male NPT Elbow	1 inch Male NPT Elbow
Bypass	YES	YES	YES
A measurement	61 in	59 in	61 in
B measurement	10 in	12 in	13 in
C measurement	16.5 in	18.5 in	19.5 in
D measurement	36 in	36 in	36 in
E measurement	15 in	15 in	15 in
F measurement	17 in	17 in	17 in

Substance

IRON

Influent challenge concentration

3 to 5 mg/L

Maximum permissible product water concentration

0.3 mg/L

Certification and Performance Standards

This system has been tested according to NSF/ANSI 42 for reduction of the substances listed. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42.

Efficiency rated water softeners shall have a rated salt efficiency of not less than 3,350 grains of total hardness exchange per pound of salt (based on NaCl equivalency) (477 g of total hardness exchange per kilogram of salt) and shall not deliver more salt or be operated at a sustained maximum service flow rate greater than its listed rating.

Efficiency was determined in accordance with NSF/ANSI 44 and that the efficiency rating is only valid at the stated salt dosage and maximum service flow rate.

Efficiency is measured by a laboratory test described in NSF/ANSI 44; that the test represents the maximum possible efficiency the system can achieve; that operational efficiency is the actual efficiency achieved after the system has been installed; and that operational efficiency is typically less than the efficiency due to individual application factors including water hardness, water usage, and other contaminants that reduce the softener's capacity.

BRITA | PRO