BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Softener

SYSTEM PARAMETERS

Softener with Smart Programming

PRODUCT FEATURES

- Our most advanced programmable valve head
- Metered regeneration for efficiency and improved water quality
- Intuitive profile - learns softening capacity based on usage profile
- Water usage efficiency up to 98%
- Pre-fill brining prevents salt bridging ensures efficient operation
- Customized to your individual needs, including household size and plumbing
- Soft water brine refill to keep your system running cleaner
- Up to six tank sizes available
- Provides high-capacity flow for reliable access to high-quality water
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 44**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 372**
- Made in an IAPMO-certified manufacturing plant

10 YEAR WARRANTY
CONTROL VALVE

Limited Lifetime WARRANTY Excellent Quality
PRESSURE TANK

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Softener

SYSTEM PARAMETERS

Softener with
Smart Programming

Programming & Control

- Fully customizable programming (including times and cycle order)
- Easy contractor set-up
- Program time of day and hardness
- Days override feature (1-28 days)
- Service Technician “Step-Through” Regeneration
- Multiple regenerations per day
- Treated water brine refill
- Factory-set pre-fill brine
- Optional Air Release Cycle

Display & Diagnostics

- Digital display screen
- Color-specific displays
- Scrolling Text Display
- Water drop flow indicator
- Programmable contractor contact screen
- 62-day diagnostic information:
  - > Flow rates
  - > Gallons since regeneration
  - > Days since regeneration
  - > Total regenerations since startup
  - > Peak flow rates
  - > Days until next regeneration


Memory & Alerts

- Low battery warning
- Battery back-up with up to 8 hrs of power carry-over
- Stores system configuration & operation data in nonvolatile memory
- Service Call Reminder (not programmed from factory)

System Features

- External accessory operation
- Valve internally ported in 1 inch

System Dimensions

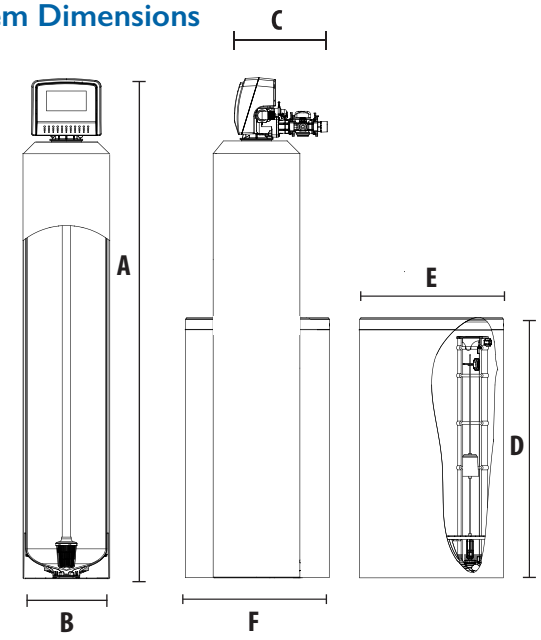

BRITA | PRO

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Softener

SYSTEM PARAMETERS

Softener with
Smart Programming

System Specifications

Part Number	BP75J	BP100J	BP150J	BP200	BP250
Salt Used - Per Regeneration (lb)	6	8	12	16	20
Grains Capacity	18,000	24,000	36,000	48,000	60,000
Regeneration Programing	Pre-Fill Brine	Pre-Fill Brine	Pre-Fill Brine	Pre-Fill Brine	Pre-Fill Brine
Resin Quantity (FT3)	3/4	1	1 1/2	2	2 1/2
Mineral Tank (in)	8 x 44	10 x 44	10 x 54	12 x 52	13 x 54
Tank Jacket	YES	YES	YES	NO	NO
Media Loaded	YES	YES	YES	NO	NO
Brine Tank Size (in)	15 x 36	15 x 36	15 x 36	15 x 36	15 x 36
Salt Storage Capacity	275	275	275	275	275
Service Flow Rate	11	13	14	16	18
Pipe Size (in)	1	1	1	1	1
Min-Max Pressure (psi)	20 - 100	20 - 100	20 - 100	20 - 100	20 - 100
Min-Max Temperature (°F)	35 - 100	35 - 100	35 - 100	35 - 100	35 - 100
Backwash GPM	1.7	2.7	2.7	3.2	4.2
Plumbing Connections	1 inch Male NPT Elbow	1 inch Male NPT Elbow	1 inch Male NPT Elbow	1 inch Male NPT Elbow	1 inch Male NPT Elbow
Bypass	YES	YES	YES	YES	YES
A measurement	51 in	51 in	61 in	59 in	61 in
B measurement	10 in	10 in	10 in	12 in	13 in
C measurement	16.5 in	16.5 in	16.5 in	18.5 in	19.5 in
D measurement	36 in	36 in	36 in	36 in	36 in
E measurement	15 in	15 in	15 in	15 in	15 in
F measurement	17 in	17 in	17 in	17 in	17 in

BRITA | PRO