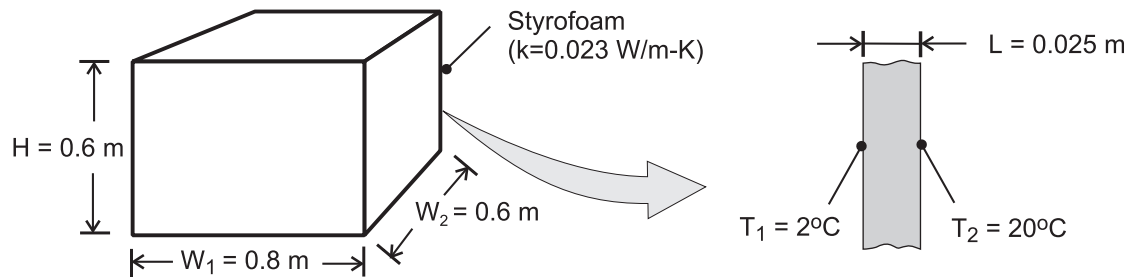# PROBLEM 1.8

KNOWN: Dimensions and thermal conductivity of food/beverage container. Inner and outer surface temperatures.

FIND: Heat flux through container wall and total heat load.

SCHEMATIC:

ASSUMPTIONS: (1) Steady-state conditions, (2) Negligible heat transfer through bottom wall, (3) Uniform surface temperatures and one-dimensional conduction through remaining walls.

ANALYSIS: From Fourier's law, Eq. 1.2, the heat flux is

$$q'' = k\frac{T_2 - T_1}{L} = \frac{0.023 \text{ W/m} \cdot \text{K} \ (20-2)^\circ \text{C}}{0.025 \text{ m}} = 16.6 \text{ W/m}^2 \qquad <$$

Since the flux is uniform over each of the five walls through which heat is transferred, the heat load is

$$q = q'' \times A_{total} = q'' \left[H(2W_1 + 2W_2) + W_1 \times W_2 \right]$$

$$q = 16.6 \text{ W/m}^2 \left[0.6\text{m}(1.6\text{m} + 1.2\text{m}) + (0.8\text{m} \times 0.6\text{m}) \right] = 35.9 \text{ W} \qquad <$$

COMMENTS: The corners and edges of the container create local departures from one-dimensional conduction, which increase the heat load. However, for H, W_1, $W_2 \gg$ L, the effect is negligible.