

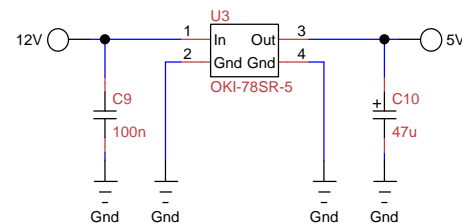
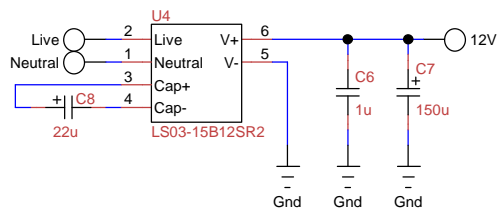

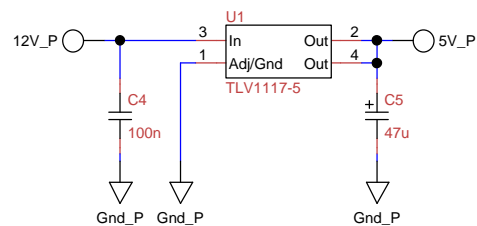
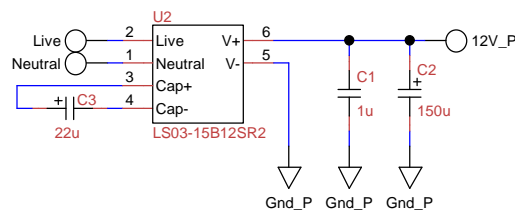

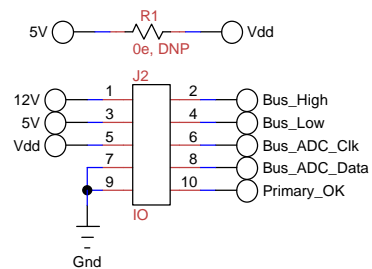


Vdd is typically
3.3V, provided
by the controller

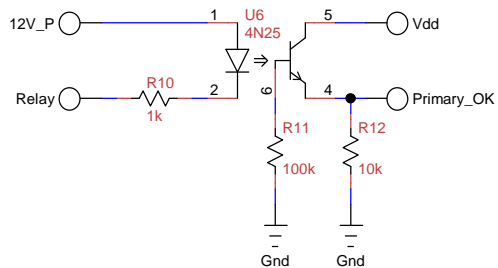

Title Bus Supply		
Author J Taylor Private		
File s\16\1610 - USB Sound\TinyCAD\Bus Supply.dsn		Document
Revision 1.0	Date 2016-09-25	Sheets 1 of 3

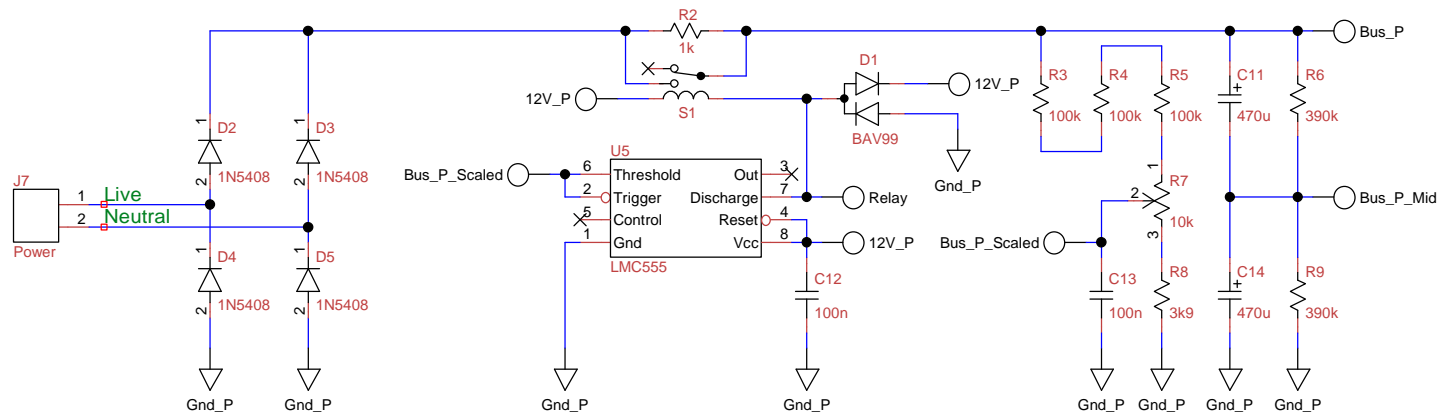


Title Bus Supply		
Author J Taylor Private		
File s\16\1610 - USB Sound\TinyCAD\Bus Supply.dsn		Document
Revision 1.0	Date 2016-09-25	Sheets 2 of 3

MAX10 configuration pull-up is
7 kΩ, minimum.
ISO721 low threshold is 0.8 V

55 turns on 2x
MS-184-075

48:32 turns on
MAGZW-43615-TC

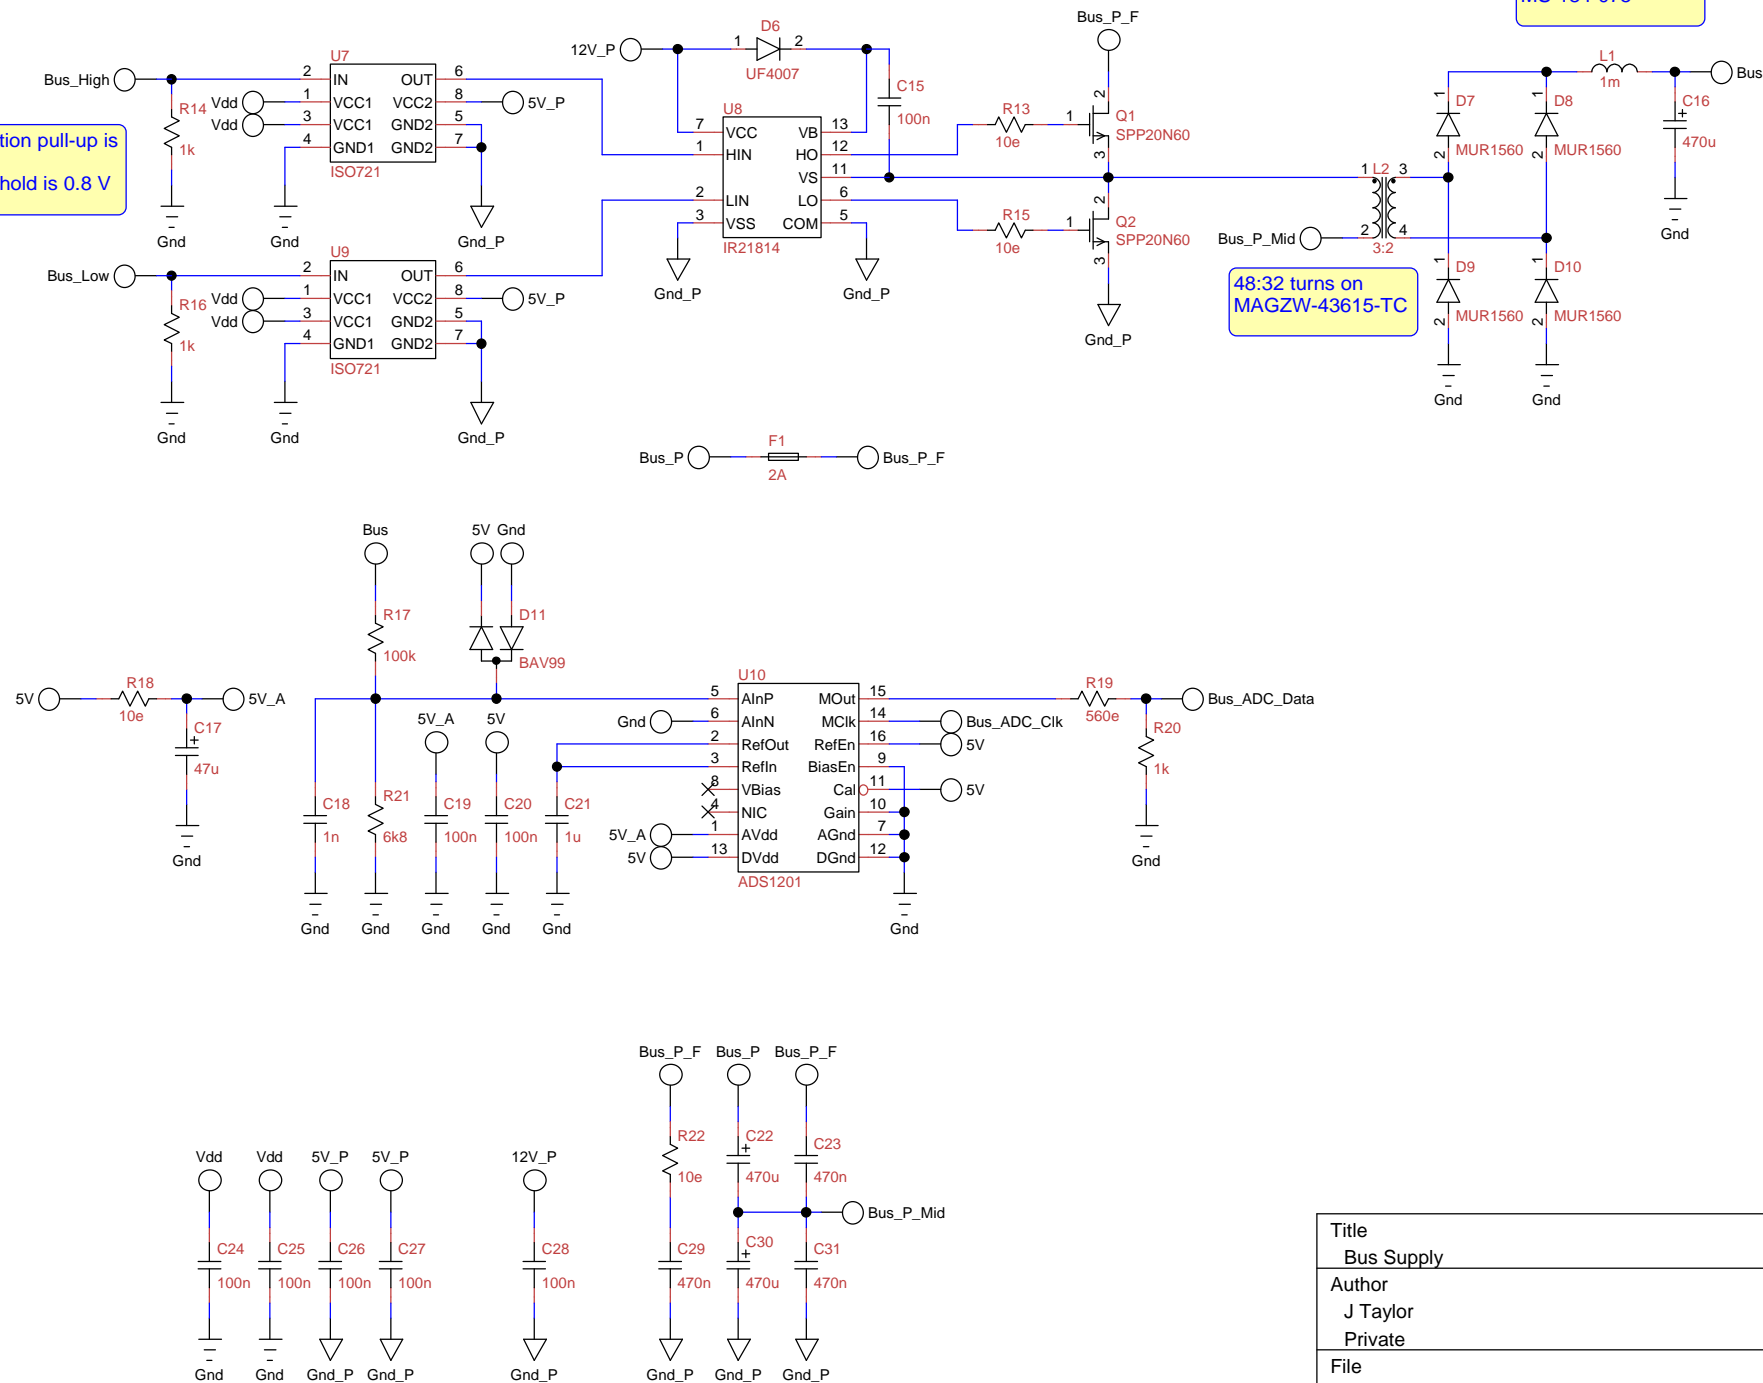

Title Bus Supply		
Author J Taylor Private		
File s\16\1610 - USB Sound\TinyCAD\Bus Supply.dsn		Document
Revision 1.0	Date 2016-09-25	Sheets 3 of 3