

### UNIVERSITY OF CAPE TOWN

### SUBJECT CODE

SUBJECT NAME

## Title of Paper

Authors:	$Student\ Numbers:$
Author 1	ATHNUM001
Author 2	ATHNUM010
Author N	ATHNUM011

know the meaning of plagiarism an	and declare that all of the work in the dissertation, save for ed, is my own.
	Author 1
	Author 2
	Author N

### Abstract

The abstract should be a one or two paragraph summary of your paper. It is meant to sell your paper to interested buyers.

## Contents

Li	List of Figures and Listings		
Li	st of	Tables	$\mathbf{v}$
N	omei	nclature	vi
	1	Acronyms	vi
	2	Terminology	ix
1	Inti	roduction	1
	1.1	Drafting Markup	2
<b>2</b>	Lite	erature Review	3
3	Me	thodology	4
	3.1	Hardware	4
	3.2	Implementation	4
	3.3	Experiment Procedure	5
4	Des	ign	7
5	Exp	perimentation	8
6	Res	m ults	9
	6.1	Figures	9
	6.2	Tables	9
	6.3	Pictures and Screen-shots	11
	6.4	Maths	12

7 Conclusion	14
Bibliography	15
A Item 1	17
B Item 2	18

# List of Figures and Listings

1	Introduction		1
2	Literature	Review	3
3	Methodolo	$\mathbf{g}\mathbf{y}$	4
	Fig. 3.1	Test setup used to test the implementation [1]	5
	Listing 3.1	OpenCL kernel to perform matrix multiplication	5
4	Design		7
5	Experimen	tation	8
6	Results		9
	Fig. 6.1	The correlation coefficient as a function of sample count	10
	Listing 6.1 graph	Octave function to format a figure and save it to a high quality PDF	10
	Listing 6.2	Example of how to use the FormatFig function	10
	Fig. 6.2 a trans	Oscilloscope measurement showing physical line signals on both ends of smission line during master switch-over [1]	11
	Fig. 6.3	An example image with custom scaling	12
	Fig. 6.4	Comparison of various image format qualities	13
7	Conclusion		14

A	Item 1	17
$\mathbf{B}$	Item 2	18

## List of Tables

1	Introduction	1
2	Literature Review	3
3	Methodology	4
4	$\mathbf{Design}$	7
5	Experimentation	8
6	Results	9
	TABLE 6.1 My Informative Table	11
7	Conclusion	14
A	Item 1	17
В	Item 2	18

## Nomenclature

### 1 Acronyms

${ m A}\ldots\ldots { m Amperes}$	
AC Alternating Current	
ADCAnalogue to Digital Converter	
APIApplication Programmer's Interface	
ARM Advanced RISC Machine	
ASIC Application Specific Integrated Circuit	
AXI Advanced Extensible Interface	
BARBase Address Register	
BCDBinary-Coded Decimal	
BdBaud, in symbols per second	
CFAR Constant False Alarm Rate	
CMOS Complimentary Metal-Oxide Semiconductor	01
CPLD Complex Programmable Logic Device	
dBmDeci-Bell, relative to 1 mW	
DC Direct Current	
DDC Digital Down Converter	
DDSDirect Digital Synthesis	
DMA Direct Memory Access	
DSP Digital Signal Processor (or processing)	
EDA Electronic Design Automation	

FIFO ..... First-in, First-out (queue)

FIR.....Finite Impulse Response

FMC . . . . . FPGA Mezzanine Card

FPGA . . . . . Field Programmable Gate Array

FSM......Finite State Machine

GUI ..... Graphical User Interface

HDL......Hardware Description Language

 $\operatorname{HPS} \ldots \ldots \operatorname{Hard} \operatorname{Processor} \operatorname{System}$ 

 $\operatorname{HSTL}$ ......High Speed Transfer Logic

I/O.....Inputs/Outputs

 $I^2C$  . . . . . Inter-IC

IC . . . . . Integrated Circuit

IDE ..... Integrated Development Environment

LE.....Logic Element

LSb.....Least Significant Bit

LSB ..... Least Significant Byte

LUT . . . . . Look-Up Table

LVCMOS..... Low Voltage Complementary Metal Oxide Semiconductor

LVDS.....Low Voltage Differential Signalling

LVPECL.....Low Voltage Positive Emitter Coupled Logic

LVTTL . . . . . Low Voltage Transistor-Transistor Logic

MIMO..... Multiple Input Multiple Output

MISO...... Master Input / Slave Output

MOSI...... Master Output / Slave Input

MSb . . . . . Most Significant Bit

MSB..... Most Significant Byte

MSI . . . . . . Message Signalled Interrupt

NCO ...... Numerically Controlled Oscillator

 $NTP \dots Network Time Protocol$ 

PC ..... Personal Computer

PCB.....Printed Circuit Board

PCI.....Peripheral Component Interconnect

PCIe.....PCI Express

PLL ..... Phase Locked Loop

PPDS . . . . . Point-to-Point Differential Signalling

PRF.....Pulse Repetition Frequency

PRI.....Pulse Repetition Interval

PSU . . . . . Power Supply Unit

RADAR ..... Radio-Assisted Direction and Ranging

REST ..... Representational State Transfer

RF ..... Radio Frequency

RISC . . . . . Reduced Instruction Set Computer

RMS.....Root Mean Square

RPM ..... Revolutions per Minute

RSDS......Reduced Swing Differential Signalling

SI.....Système International d'Unités

SoC.....System On Chip

SPI..... Serial Peripheral Interface

SSTL ..... Stub Series Terminated Logic

TCP..... Transmission Control Protocol

TTL . . . . . . Transistor-Transistor Logic

UART ...... Universal Asynchronous Receiver Transmitter

UDP.....User Datagram Protocol

UFM ..... User Flash Memory

URL.....Uniform Resource Locator

V......Voltage

VHDL . . . . . VLSI HDL

VLSI . . . . . Very Large-Scale Integration

XML . . . . . eXtensible Markup Language

#### 2 Terminology

**Developer** FPGA firmware developer, using any firmware development

tool.

**Device** The specific target FPGA.

Megafunction A target-specific module, typically generated from within the

vendor IDE, after the Altera nomenclature.

Module Akin to a Verilog module; i.e. unit of digital circuit that has

ports to the outside world and can exist at any level of the

design hierarchy.

Object file An intermediary file used in the ALCHA compilation

process. It is the reult of compiling a single translation unit

and describes a collection of objects.

Peripheral Any device, external to the FPGA, that interfaces directly

with the FPGA.

Platform The platform that the ALCHA compiler runs on, including

operating system and computer hardware.

Target The platform ALCHA is compiling to, including FPGA,

PCB, peripherals and vendor IDE.

Translation unit Akin to a C language translation unit, i.e. a collection of

source files and headers that translate to a single object file

User The developer who is using ALCHA to develop FPGA

firmware.

Vendor The FPGA manufacturer.

## Introduction

If you are new to LATEX, I would suggest reading [2]. If you want to use Microsoft Word (or one of its many clones), you can download the official IEEE conference template from [3]. The TA and tutors can provide LATEX support. Use Word at your own risk.

The introduction is where you set the scene. Here you reference other, related work, as well as a summary relating to how you improve upon said work [4]. In the sense of the practical reports, the introduction will summarise the experiment the practical is all about.

As a general rule of thumb, keep the introduction to the first column and don't put any sub-sections into it.

Remember that, for bibliography citations to work, you have to include running BibTeX in the compile chain. My TeXstudio [5] compile chain for "Build & View" is

```
txs:///bibtex | txs:///pdflatex |
txs:///bibtex | txs:///pdflatex |
txs:///view-pdf-internal
```

#### 1.1 Drafting Markup

When the template is in draft mode, you can use various helper macros, as illustrated below:

This is old text that should be removed. This is a note about something to remember, or comments from the proof-reader. This is something that still needs doing. When compiled with \Draftfalse, the content of these macros are removed from the output, except something that needs to be rephrased.

## Literature Review

## Methodology

In this section you should describe the method of the experiment.

#### 3.1 Hardware

Include detail such as the hardware used. It's generally a good idea to include a block diagram at this point, such as the one presented in Fig. 3.1. This figure was drawn in InkScape [6]. When you want to import an InkScape figure (SVG format) into LATEX, simply save it to PDF (use the drawing extents as the media box area) and include the figure.

#### 3.2 Implementation

Also mention the implementation source code:

```
# You can include inline Matlab / Octave code
x = linspace(0, 2*pi, 1000);
y = sin(x);
plot(x, y); grid on;
```

or you could turn it into a float: see listing 3.1. Floats are tables, figures and listings that appear at a different place than in the source code. This template is set up to put floats at the top of the next column, as prescribed by the IEEE article specification.

Only list what is relevant. Don't give too much detail - just enough to show what you've done. This template supports the following languages:




Fig. 3.1. Test setup used to test the implementation [1].

```
__kernel void Multiply(
    __global float* A, // Global input buffer
    __global float* B, // Global input buffer
    __global float* Y, // Global output buffer
    const int N // Global uniform
){
    const int i = get_global_id(0); // 1st dimension index
    const int j = get_global_id(1); // 2nd dimension index

    // Private variables
    int k;
    float f = 0.0;

    // Kernel body
    for(k = 0; k < N; k++) f += A[i*N + k] * B[k*N + j];
    Y[i*N + j] = f;
}</pre>
```

Listing 3.1. OpenCL kernel to perform matrix multiplication

- Matlab (Octave)
- GLSL
- OpenCL
- Verilog
- VHDL
- TCL
- Python
- C++ (use the name 'Cpp')

#### 3.3 Experiment Procedure

Furthermore, include detail relating to the experiment itself: what did you do, in what order was this done, why was this done, etc. What are you trying to prove / disprove? You can include hypotheses, such as presented in Hypothesis H0 below.

**Hypothesis H0:** All scientific papers contain hypotheses. An hypothesis is generally not longer than a single paragraph, but the command does support multiple paragraphs if required.

Design

Experimentation

## Results

The results section is for presenting and discussing your findings. You can split it into subsections if the experiment has multiple sections or stages.

#### 6.1 Figures

Include good quality graphs (see Fig. 6.1). These were produced by the Octave code presented in listings 6.1 and 6.2. You can play around with the PaperSize and PaperPosition variables to change the aspect ratio. An easy way to obtain more space on a paper is to use wide, flat figures, such as Fig. 6.2.

Always remember to include axes text, units and a meaningful caption in your graphs. When typing units, a  $\mu$  sign has a tail! The letter "u" is not a valid unit prefix. When typing resistor values, use the  $\Omega$  symbol.

#### 6.2 Tables

Tables are often a convenient means by which to specify lists of parameters. An example table is presented in table 6.1. You can use Tablesgenerator to make your LATEX tables.

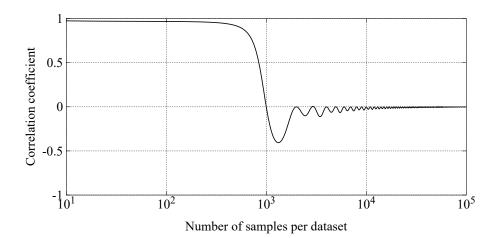


Fig. 6.1. The correlation coefficient as a function of sample count.

```
function FormatFig(X, Y, File);
  set(gcf, 'PaperUnits'
                                 , 'inches');
  set(gcf, 'PaperOrientation', 'landscape');
                                         [8, 4]);
  set(gcf, 'PaperSize'
  set(gcf, 'PaperPosition'
                                 , [0, 0, 8, 4]);
  set(gca, 'FontName', 'Times New Roman');
set(gca, 'Position', [0.1 0.2 0.85 0.75]);
  xlabel(["\n" X]);
  ylabel([Y "\n\n"]);
  setenv("GSC", "GSC"); # Eliminates stupid warning
  print(...
    [File '.pdf'],...
     -dpdf'
  );
end
```

Listing 6.1. Octave function to format a figure and save it to a high quality PDF graph

```
# Create a new figure
figure;
\mbox{\tt\#} Some code to calculate the various variables to plot...
plot(N, r, 'k', 'linewidth', 4); grid on; # Plot the data
xlim([0 360]);
                                           # Limit the x range
ylim([-1 1]);
                                            # Limit the y range
set(gca, 'xtick', [0 90 180 270 360]);
                                           # Set the x labels
FormatFig(...
                                            # Call the function with:
  'Phase shift [\circ]',...
                                                   # The x title
  'Correlation coefficient',...
                                                   # The y title
  ['r_vs_N;_f=' num2str(f) ';_P=' num2str(P)]... # Format the file name
);
                                            # Close all open figures
close all;
```

Listing 6.2. Example of how to use the FormatFig function

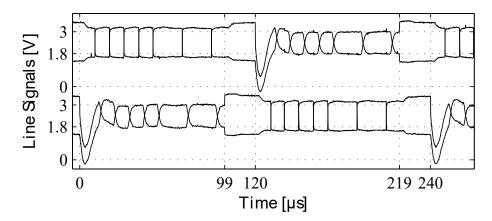


Fig. 6.2. Oscilloscope measurement showing physical line signals on both ends of a transmission line during master switch-over [1].

 $\begin{array}{c} \text{TABLE 6.1} \\ \text{My Informative Table} \end{array}$ 

Heading 1	Heading 2	Heading 3
Data	123	321
Data	456	654
Data	789	987

#### 6.3 Pictures and Screen-shots

When you include screen-shots, pdfIAT<sub>E</sub>X supports JPG and PNG file formats. PNG is preferred for screen-shots, as it is a loss-less format. JPG is preferred for photos, as it results in a smaller file size. It's generally a good idea to resize photos (not screen-shots) to be no more that 300 dpi, in order to reduce file size. For 2-column article format papers, this translates to a maximum width of 1024. Never change the aspect ratio of screen-shots and pictures!

It is highly recommended to make use of the \Figure macro for figures. It puts all the formatting tweaks in one place, so that you don't need to update all the individual figure inclusion points when you want to do a styling update. The file name is used for the LATEX label, such as "Fig. 6.3".

Make sure to always use the best quality image possible. Use JPEG for photos, PNG for screen-shots and PDF (scalable vector graphics) for everything else. JPEG is lossy, but good for photos, whereas PNG is lossless and good for images with large areas of solid colour, as



Fig. 6.3. An example image with custom scaling

can be seen in Fig. 6.4.

#### 6.4 Maths

LATEX has a very sophisticated maths rendering engine, as illustrated by equation 6.1. When talking about approximate answers, never use  $\pm 54$  V, as this implies "positive or negative 54 V". Use  $\approx 54$  V or  $\sim 54$  V instead.

$$y = \int_0^\infty e^{x^2} \mathrm{dx} \tag{6.1}$$

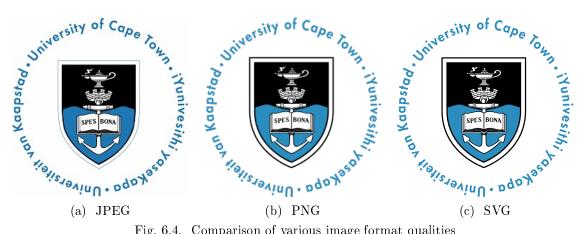


Fig. 6.4. Comparison of various image format qualities

## Conclusion

The conclusion should provide a summary of your findings. Many people only read the introduction and conclusion of a paper. They sometimes scan the tables and figures. If the conclusion hints at interesting findings, only then will they bother to read the whole paper.

You can also include work that you intend to do in future, such as ideas for further improvements, or to make the solution more accessible to the general user-base, etc.

Publishers often charge "overlength article charges" [7], so keep within the page limit. In EEE4084F we will simulate overlength fees by means of a mark reduction at 10% per page. Late submissions will be charged at 10% per day, or part thereof.

## Bibliography

- [1] J. Taylor and J. G. Hoole, "Robust Protocol for Sending Synchronisation Pulse and RS-232 Communication over Single Low Quality Twisted Pair Cable," in *Proceeding of ICIT*. Taiwan: IEEE, Mar. 2016.
- [2] T. Oetiker, H. Partl, I. Hyna, and E. Schlegl, "The Not So Short Introduction to  $\LaTeX$  2 $_{\varepsilon}$ ," https://tobi.oetiker.ch/lshort/lshort.pdf, Jul. 2015, version 5.05.
- [3] "IEEE Conference Paper Templates," http://www.ieee.org/conferences\_events/conferences/publishing/templates.html.
- [4] A. Baboon, B. Charles, D. Ester, and F. Generalson, "An Amazing Title," Their Not-so-awesome University, Technical Report, Apr. 1492.
- [5] B. van der Zander, J. Sundermeyer, and T. Hoffmann, "TeXstudio A LATEX Editor," https://www.texstudio.org/.
- [6] "InkScape Website," http://www.inkscape.org/.
- [7] "Voluntary Page and Overlength Article Charges," http://www.ieee.org/advertisement/2012vpcopc.pdf, 2014.

# Appendix A

# Item 1

# Appendix B

# Item 2