



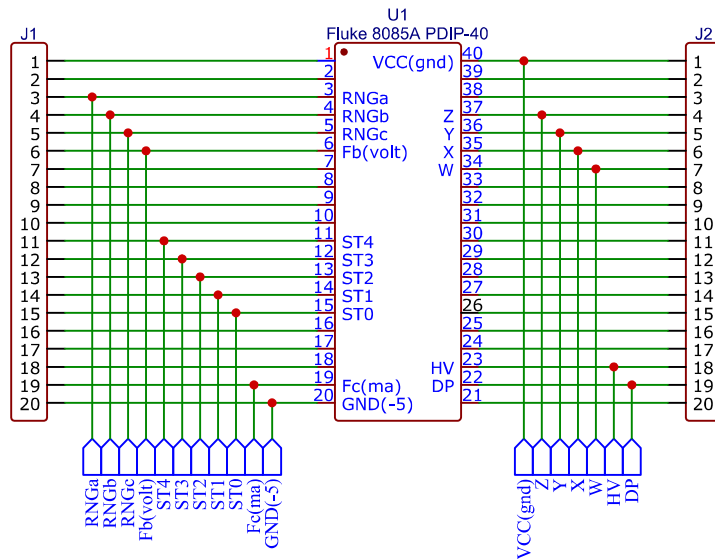


U1 shown for reference as this IC is located below on carrier board.
Pin 1 of U1 is located toward the front of the unit.

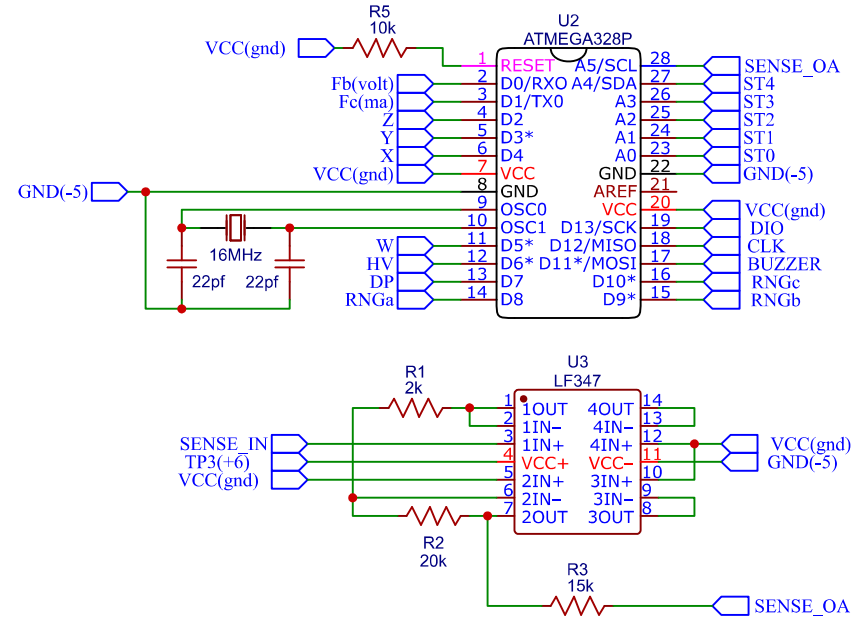


OA3 and 4 not used - connected as voltage followers to VCC(gnd).

J3
LED MODULE



U4
EK2146

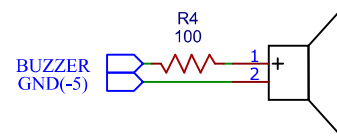

J4
SENSE AND TP3



The 328P and 8050A ICs use GND as their +5 VCC and -5 as their GND.
The LED Module and the Buzzer also use GND as their +5 VCC and -5 as their GND.

TITLE: 8050A LED and Continuity		REV: 1.0
EasyEDA	Company:	Sheet: 1/1
	Date: 2026-05-16 Drawn By: jpwolfe31	