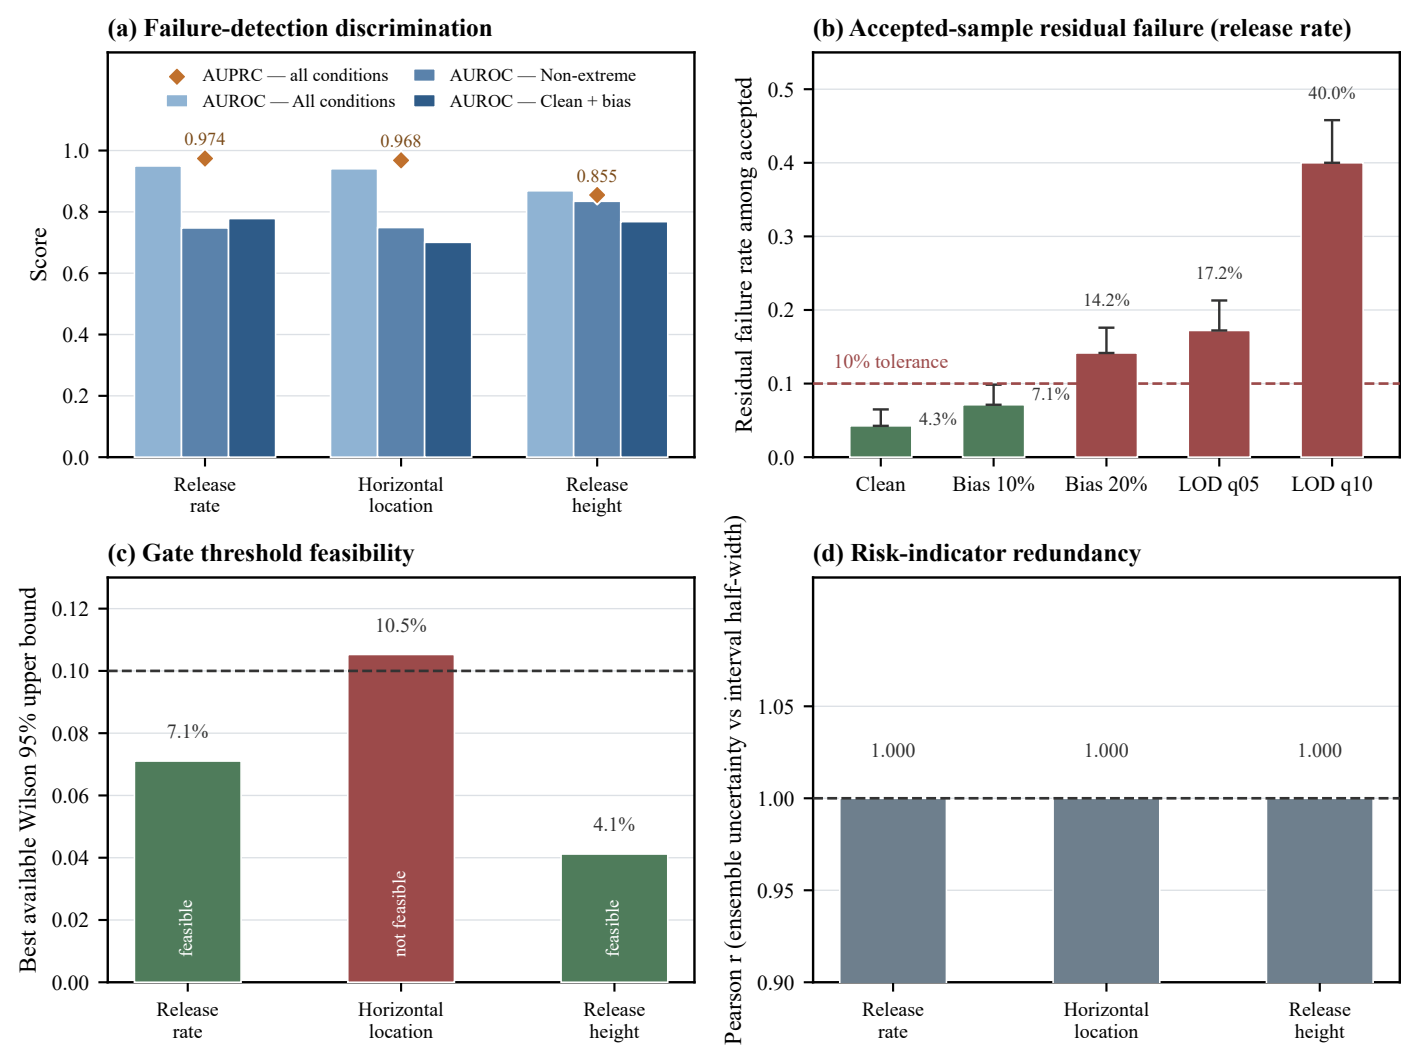

(a) Failure-detection discrimination
AUPRC — all conditions
AUROC — All conditions
AUROC — Non-extreme
AUROC — Clean + bias
Score
0.974
0.968
0.855
Release rate
Horizontal location
Release height
(b) Accepted-sample residual failure (release rate)
Residual failure rate among accepted
10% tolerance
4.3%
7.1%
14.2%
17.2%
40.0%
Clean
Bias 10%
Bias 20%
LOD q05
LOD q10
(c) Gate threshold feasibility
Best available Wilson 95% upper bound
7.1%
10.5%
4.1%
feasible
not feasible
feasible
Release rate
Horizontal location
Release height
(d) Risk-indicator redundancy
Pearson r (ensemble uncertainty vs interval half-width)
1.000
1.000
1.000
Release rate
Horizontal location
Release height