

(MOUNTING DIMENSIONS FOR P.C.BORD; TOLERANCE±0.1)  
プリント基板取付寸法図  
 一般公差: ±0.1  
 (公差は累積しないこと)

3xφ3.5

5.05

0

3.5

6.6

9.6

12.6

15.6

18.6

21.6

24.6

27.6

30.7

36.9

40.4

43.5

46.5

49.5

52.5

55.5

58.5

61.5

64.5

67.6

71.1

74.6

48xφ1.1

38.65




84.7

4.5

5.7



15mm大

MAX

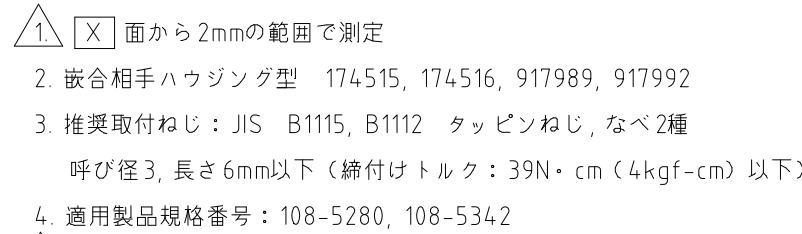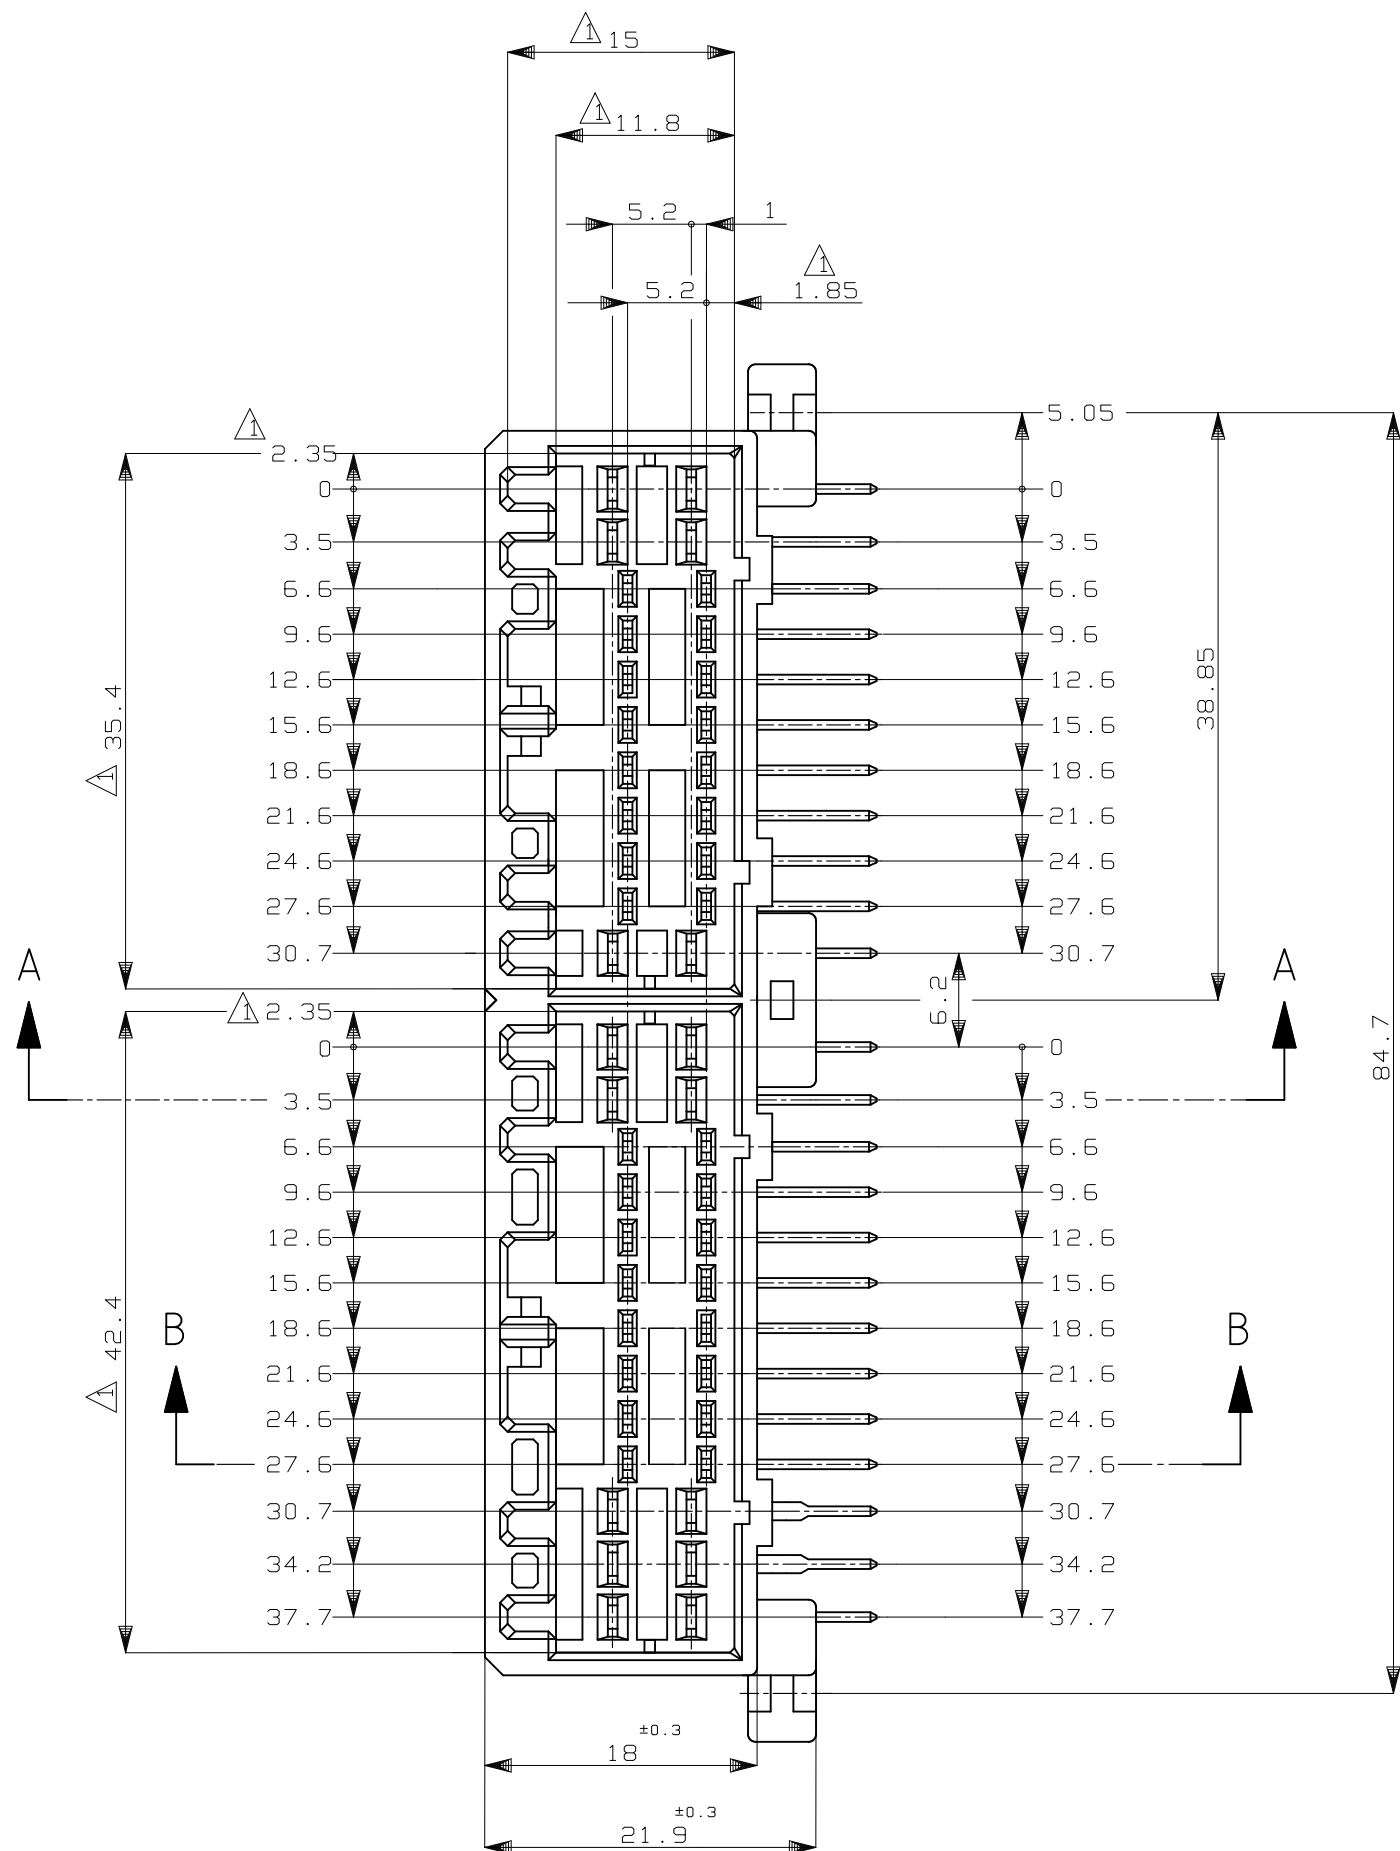

1. MUST BE KEPT BETWEEN [X] AND 2
2. THE MATING PLUG HSG PART NUMBER:174515, 174516, 917989,917992
3. RECOMMENDED MOUNTING SCREW;3mmDIA,6mmLENGTH(MAX.)  
PAN HEAD,CLASS 2 TAPPING SCREW SPECIFIED IN JIS  
B1115,B1122  
(TIGHTENING TORQUE;39.2N・cm(4kgf・cm)MAX.)
4. APPLICABLE PRODUCT SPEC NO ; 108-5280, 108-5342
5. CIRCUIT NUMBER

6. MARKING FOR DISCERNMENT OF THE CONTACT FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWG. NO. SHINOHARA	OBJECTION NO. 08FEB08	 TE Connectivity			
DIMENSIONS: 単位:mm			CHK. K.BETSUI	APPROV. K.BETSUI				NAME 名
	TOLERANCES UNLESS OTHERWISE SPECIFIED 公差:mm			PRODUCT SPEC 製品仕様書 SEE NOTE 4	48POSITION CAP HOUSING ASSEMBLY 040/070 SERIES HYBRID I/O CONNECTOR			
	0 PLG ±			APPLICATION SPEC 取付適用規格	SIZE A1	GAGE CODE 00779	DRAWING NO. C-174917	RESTRICTED TO -
	ANGLES ±			WEIGHT 24.1 g				
	MATERIAL 仕上			CUSTOMER DRAWING		SCALE: 2:1 SHEET 1 of 1 REV. M		
HOUSING: PBT CONTACT: BRASS								