


1 2 3 4 5 6

A

A



NOTE: For the best power on/off pop performance, the amplifier should be set in the shutdown mode prior to power on/off operation (set SD low to power down the amp).

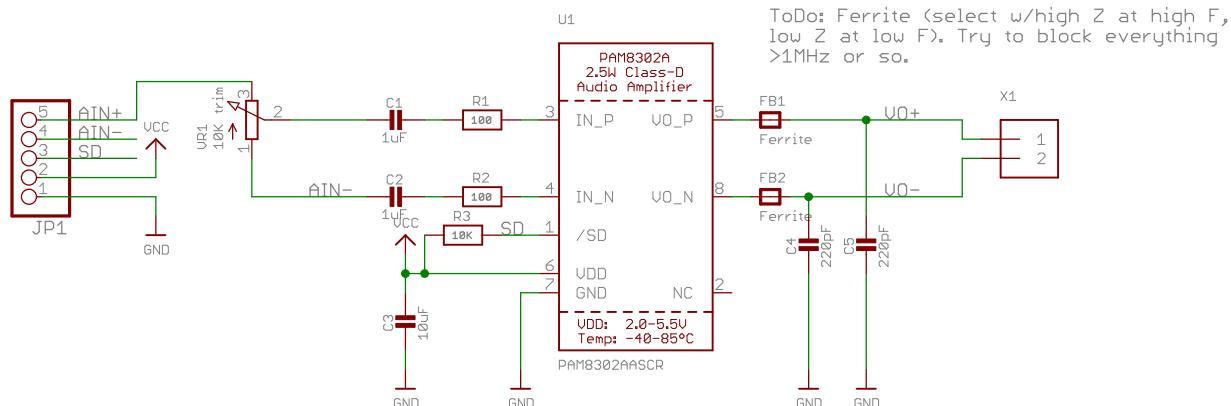

C3: Use 1uF to filter high frequency noise, or 10uF if lower frequency noise is present



ISSUE	ADAFRUIT INDUSTRIES		© 2014
DRAWN KTOWN	TITLE		REV A
CHECKED >CHECKED	DATE	2/20/17 8:25 AM	DRG NO >DRGNO
DATE >DATE	FILE: Adafruit PAM8302		PAGE: 1/1

1 2 3 4 5 6