

An Analysis of Fireballs from Willamette's D6 AllSky Survey

by

Peter Joseph Gibson

Submitted in Partial Fulfillment of the
Requirements for the Degree

Bachelor of Arts

Supervised by
Dr. Jed Rembold

Department of Physics

Willamette University, College of Liberal Arts
Salem, Oregon

2019

Presentations and publications

P. Gibson, Analyzing Fireballs from Willamette's D6 AllSky Survey, Poster Presentation at Willamette University, Research Seminar II: Thesis Presentation (May 2019)

P. Gibson, Analyzing Fireballs from Willamette's D6 AllSky Survey, Oral Presentation at Willamette University, Research Seminar II: Thesis Presentation (April 2019)

P. Gibson, Analyzing Fireballs from Willamette's D6 AllSky Survey, Oral Presentation at Willamette University, Research Seminar I: Status Report Presentation (December 2018)

P. Gibson, Analyzing Fireballs from Willamette's D6 AllSky Survey, Oral Presentation at Willamette University, Advanced Techniques in Experimental Physics: Senior Proposal Presentation (April 2018)

Acknowledgments

I would like to thank the following professors for their tremendous support and advice throughout my Willamette experience:

- Dr. Jed Rembold for teasing me and providing me with Hershey's Kisses as a consolation for his hate.
- Dr. Rick Watkins for telling me "You got this!" in trying times.
- Dr. Daniel Borrero, Dr. Michaela Kleinart, Dr. David Altman for their kindness and unwavering confidence in our graduating class.

I would also so like to thank the following people for helping me through countless homework problems, talking down my problems, and also picking on me when I deserve it:

- Trent Jones for being a below par friend and an above par golfer.
- Jo Stensass for serving me all sorts of help along the way and providing a willingness to set me up for success.
- The wizards who answer questions on Stack Overflow and spend time editing Wikipedia to make it a more reliable resource.
- Not only to God but to Jesus

Lastly, but perhaps most importantly, I would like to thank my mother and father for their unconditional love and for providing me with countless wonderful life opportunities such as the entirety of my college experience. There is no argument that I would not be at this point without them.

Abstract

General Abstract

As fireballs, more commonly known as shooting stars, fly through Earth's atmosphere at breakneck speeds, they emit light that can be observed on our planet's surface. Willamette's D6 AllSky Survey is a camera system that probes the night's sky for these events which can be further utilized for large-scale analysis such as determining flux rates. Flux rates depict the number of events that occur per unit time per unit area. Because one camera system can only observe $< 0.4\%$ of Earth's total sky area, amateur astronomers hold a significant role in fireball observations. Their observations provide a robust data sample size that can then be used to gain a deeper understanding of the flux rates and property distributions of fireballs. While complex multi-camera professional systems currently exist, there is need for more economic, accessible, and versatile systems. We will discuss the feasibility of our current observational setup and how it compares to more elaborate existing systems.

Technical Abstract

Fireballs, more technically known as bolides, are recognizable by the light they emit through ablation. The D6 AllSky Camera was designed by Dr. Jed Rembold and Kyle McSwain as an alternative observation system for fireball research. It is smaller, more portable, and significantly cheaper than most existing systems used by professional astronomers. By measuring and comparing distributions of fireballs to other systems, primarily in the form of average flux, we aim to assess the feasibility of using the D6 AllSky Camera. Due to poor weather and other unforeseen complications, our data sample was not sufficiently large enough to produce a confident average flux rate. However the versatile framework established in this research will assuredly aid in the analysis of fireballs throughout further research.

Table of Contents

Acknowledgments	iii
Abstract	iv
List of Figures	vi
1 Introduction	1
2 Background	4
2.1 Description of Fireballs	4
2.2 Event Detection	6
2.3 Photometry	11
2.4 Parameters of Interest	12
3 Methodology	15
3.1 Calculating Total Observation Time	15
3.2 Calculating Total Observation Area	16
3.3 Calculating Cloud Coverage	25
4 Data	28
4.1 Time Distributions	28
4.2 Coverage Distributions	29
4.3 Detected Fireballs	31
4.4 Camera Capabilities	32
5 Conclusion	34
5.1 Results	34
5.2 Critique	35
5.3 Outlook	37

List of Figures

1.1	A plot of bolide flux vs. energy and diameter using a wide collection of data	2
2.1	A depiction of near-Earth object classification. Asteroids and meteoroids may be found in space, while meteors and their brighter counterpart, fireballs, burn up through Earth's atmosphere. Unlike ordinary fireballs, meteorites remain intact	5
2.2	The Perseid meteor shower and its relation to our solar system. . .	6
2.3	The three CAMS network stations within a 50 mile radius.	7
2.4	The Willamette D6 allsky camera (2016). Paired with a little imagination it resembles an astromech droid from Star Wars. [We should get a new image of this, as it has the sealing cowl along the top now.]	9
2.5	An entrenched alternative fireball observation system.	10
2.6	A depiction of atmospheric extinction's effect on a sunset on a smokey day.	12
3.1	An example observation log and the resulting time analysis information	16
3.2	Left: our rectangular field of view. Right: A separate system's more complete circular view.	17
3.3	A theoretical depiction of two separate pixel regions' corresponding observable surface areas. These areas are dependent on the angular coverage of that pixel region.	18
3.4	From left to right: an unaltered snapshot, the dark frame, and the dark frame subtracted from the original snapshot. Note the region enclosed depicts a clear area of difference between the images. . .	20
3.5	Two separate D6 snapshots alongside their thresholded images. Note the differences in their respective threshold cutoff values. . .	21

3.6	A D6 AllSky snapshot (left) alongside a Stellarium display (right). We compare the two to find recognized stars that are found in both images. These are circled in lime green in the Stellarium display.	22
3.7	A visualization of altitude and azimuth measurements on a unit sphere. Note that a positive azimuth angular measurement moves from North towards East.	22
3.8	A set of four stars (yellow) that could be compared to calculate six separate angular distance per pixel data points (white).	24
3.9	Left: our angular separation per pixel data set. Right: that same data set with two rotated and appended data sets.	25
3.10	From top left to bottom right: a cloudy D6 snapshot, that snapshot with a threshold applied, the thresholded image after a close/erode function was applied, the subsequent pixels assigned angular distance per pixel measurements. The angular distance per pixel map is discussed more thoroughly in the Data chapter.	27
4.1	A plot of all D6 AllSky observation dates and recognized meteor showers within the 2018 – 2019 academic calendar year. <i>[Comment on major feature just like you did in the text.]</i>	29
4.2	A plot of angular distance per pixel measurements from celestial comparisons. <i>[Why are they grouped the way they are? How do you feel about the coverage? Comment more about the plot itself! Also, this plot badly needs axes and label sizes that match the plot below, especially when they are on the same page like this!]</i>	30
4.3	Average angular separation per pixel for different camera pixel regions.	30
4.4	A plot of total observation time and average observable area for each month. <i>[Say more! Why include this plot!? Any interesting features?]</i>	31
4.5	The initial pixel locations of all detected fireballs. <i>[So what? Why should I care or what is interesting about this?]</i>	32
5.1	A D6 snapshot comparison of low and high noise. <i>[This caption is pathetic. :) Comment on it! Also, you should get your sizing such that the images do not extend beyond the text width.]</i>	37

1 Introduction

Based on a rough estimate, there are about 10 000 trillion ants, 7.6 billion humans, and a few million elephants in the world. When considering this data set, one might come to the conclusion that there are more small objects in the world than there are large objects. It so happens that this conclusion not only holds true on Earth, but it also holds true in our universe. For every singular large object in space, there are significantly more smaller objects. To provide a parallel to the animal example, in our solar system, there is one star, eight planets, and an almost incomprehensible number of small rocks traveling through space.

In space, distances are presented on an extremely large scale when compared to on-Earth distances. Similarly objects in space travel significantly faster than objects observed on earth. For example, the Earth travels at approximately 30 km s^{-1} while small rocks can travel between 11 km s^{-1} to 70 km s^{-1} . The speeds of these rocks exceed the muzzle velocity of a bullet [11]. When we observe a meteor shower, we are witnessing a barrage of these bullet-like rocks. Fortunately for mankind, Earth's atmosphere provides a protective shield. This shield is composed of tightly packed (relative to the vacuum of space) air molecules.

As a rocky object travels through Earth's atmosphere, it collides with particles and burns in a phenomena known as ablation. The result is a release of energy in the form of both heat and light. The objects, which ignite and begin to break down are called meteors. As a meteor releases light, the brightness can be measured from Earth's surface and is expressed as a photometric (visual) magnitude. The brightest meteors, which have a magnitude less than -4 , are referred to as fireballs. By observing the magnitude, duration, and other properties of individual fireball events, an observer can estimate impact energies and sizes of these near-Earth rocky objects.

Studying these near-Earth objects can give us good estimates for how many objects you might expect to see pass through a given area of space within a specific amount of time. This measurement is called flux. By determining flux, we can more accurately predict the likelihood of objects in space being hit by near-Earth objects. Although the case may have been an extreme one, the space satellite

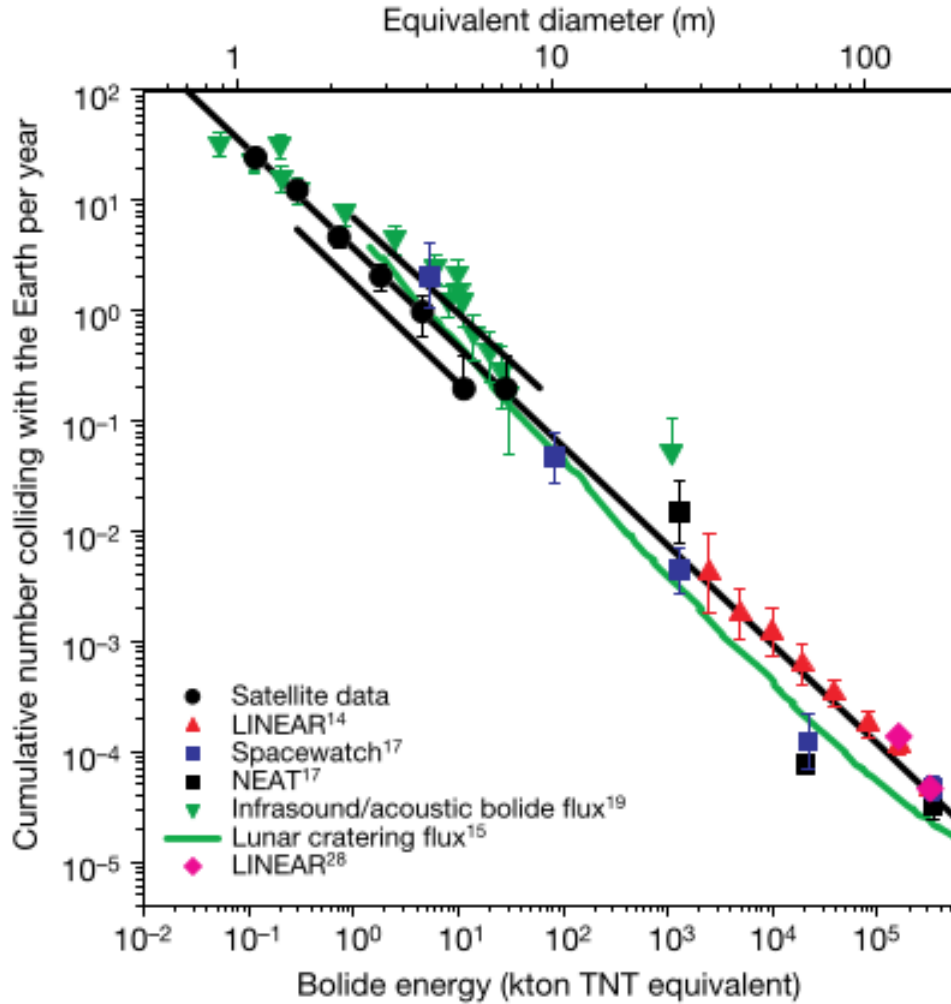


Figure 1.1: A plot of bolide flux vs. energy and diameter using a wide collection of data

Olympus was struck and destroyed by a meteoroid during the Perseid meteor shower in 1993 [1]. Additionally, given the relationships between the number of objects hitting earth per time for different objects, we can estimate the probability of extremely large impacts on earth. These estimates, similarly to predictions surrounding volcanic or earthquake activity, give us insight into past events and help us foresee likelihoods of future events.

This project aims to analyze the feasibility of the Willamette D6 AllSky camera, a new alternative camera system for conducting fireball research. Occupying about the same space as a traffic cone, this camera is easily transportable and does not require an expensive computational base. To determine the feasibility of our setup, we will compare our measured flux rates to those found by more well-

recognized systems. Peter Brown, an astronomy researcher, created a now-famous relationship between flux and bolide energy/diameter. As seen in Fig. 1.1, bolides with extremely high energies are far less likely to collide with earth than their less powerful counterparts. By comparing our flux rates to those found in Fig. 1.1 (for small energies), we can assess how consistent our data is with professional systems.

This paper is broken up into several sections for ease of reading. Chapter 2 details useful information surrounding fireballs, their importance, existing research, and the theory necessary to calculate flux rates.

2 Background

Thanks to a protective atmosphere, Earth can withstand impacts from dust to boulder-sized objects traveling faster than bullets without so much as a dent on Earth's surface. While most of these near-Earth objects are extremely small and don't leave much of a trace, the larger objects can leave a trail of light visible from Earth's surface as they burn up in our atmosphere. In this chapter, we will discuss the classification of near-Earth objects, how fireballs are observed, and give important insight as to why and how we will compare our photometric survey with others.

2.1 Description of Fireballs

When considering types of near-Earth objects, many names come to mind: asteroids, meteors, meteorites, and fireballs are all often used interchangeably. However, there are several key distinctions between these objects. Asteroids are the largest of this group and are generally over 10 m in diameter [12]. These objects are responsible for massive craters that are visibly present on the moon. Meteoroids are anywhere between 10 μm and 10 m and are far more numerous than their asteroid cousins.

Meteoroids that pass through Earth's atmosphere become meteors. As a meteor passes through our atmosphere, it begins to ablate. Ablation begins when a fast moving meteor, typically traveling over 10 m/s, encounters air particles that slow it down. This leftover kinetic energy is turned into heat and is hot enough to vaporize outer layers of the meteor. Atoms within these vaporized outer layers and nearby air molecules get excited to a point where they release light. The amount of light that reaches an observer on Earth's surface can be measured in terms of apparent magnitude. Magnitude is represented on a \log_{10} scale where dimmer objects are represented by high numbers and brighter objects are lower. The equation for calibrated magnitude is

paths with the orbit of a collection of debris. Such collections often orbit large masses such as Jupiter or the sun [13]. For example, the Perseid meteor shower has a highly elliptical orbit around the sun as seen in Figure 2.2. As comets travel through space, small bits of rock and ice separate from them. This process is due to differences in pressures and heat on different areas of the comet. Comet fragments make up a majority of the substance in meteor showers.

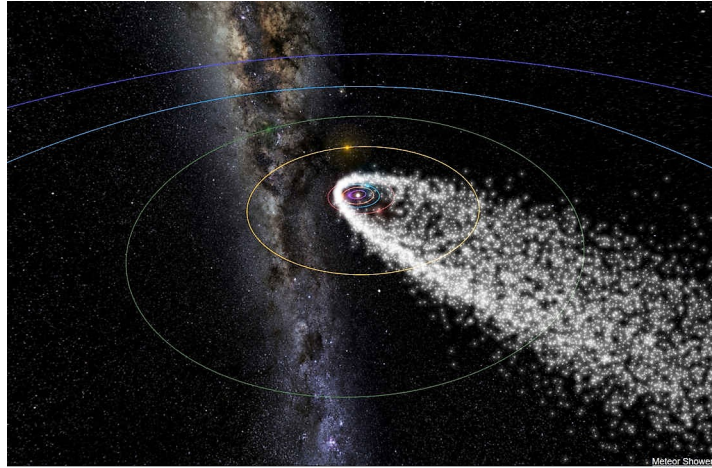


Figure 2.2: The Perseid meteor shower and its relation to our solar system.

In contrast, there is debris in space that is not connected to any meteor shower. Events stemming from random debris are called sporadic events. Due to the innate nature of gravity, debris in space often gets collected and becomes part of a larger system such as a meteor shower. Thus, sporadic events are less common. Collecting information on fireball events allows astronomy researchers to develop a better understanding of the presence of matter in space.

2.2 Event Detection

To compare our camera system to other professional systems, we must acquire enough event data to determine a flux rate. This section will discuss how different observation systems collect data on fireballs. We will specifically detail how the Willamette D6 allsky camera differs from professional cameras.

2.2.1 Existing Surveys

While amateur astronomers and low-budget systems capture useful information, larger professional systems act as a vitally important comparison point. Because many professional surveys are composed of multiple cameras working in unison,

they have the advantage of multiple perspectives on a singular event. This leads to more precise measurements of parameters like velocity, apparent magnitude, and location. Individual events captured by an individual observer do contribute to the pursuit of knowledge. However, a small camera system that cannot yield similar data to more professional surveys serves only a marginal amount of utility.

Cameras for allsky Meteor Surveillance (CAMS), the SPanish Meteor Network (SPMN), NASA’s allsky Fireball Network and the Lincoln Near Earth Asteroid Research (LINEAR) program are examples of well-established existing meteor observing surveys. All of these programs are continuously acquiring data and adding their findings to existing databases. Much of this data is widely available online, but vary from survey to survey. Funded by NASA, Cameras for allsky Meteor Surveillance (CAMS) aims to verify minor meteor showers and trace them back to their existing parent comets [6]. The project was created by Peter Jenniskens and is based in California. The CAMS network is spread across 3 different locations as seen in Fig. 2.3 and consists of over 60 cameras. Each camera has a relatively narrow field of view 30 deg. When arranged intentionally, these cameras provide a high resolution image of the entire visible sky. By spreading their cameras across three separate locations, the CAMS research group can measure precise trajectories of incoming meteors.



Figure 2.3: The three CAMS network stations within a 50 mile radius.

Similarly to the phenomena of trying to catch a baseball with only one eye open, confidently capturing a three dimensional trajectory of a fireball is extremely difficult when using only one camera. Multiple cameras provide different fireball-path perspectives and allow us to geometrically solve for the event’s depth. Accurate trajectories are particularly useful in back-tracing the motion of the meteor’s orbit. The CAMS team has reduced over 320,000 of these orbits [9]

The SPanish Meteor Network (SPMN) works extremely similarly to the CAMS project. It consists of 25 observation stations located across Portugal and Spain [13]. In addition to becoming the first organization in Spain to successfully calculate the orbital path of a meteor, this organization revolutionized fireball research by developing the first CCD allsky cameras, or cameras that observe the entire visible sky. [7] While this approach results in lower resolution event capturing, it is much cheaper and covers the same sky area. These cameras are now in use all across the world.

While the SPMN and CAMS are extremely powerful research organizations, their study of meteors only slightly overlaps with the research being discussed in this paper. Because of their high grade equipment, they are able to capture data from extremely dim sources. Fireballs, quantified by a magnitude below -4 , compose only a small fraction of the meteors analyzed by these organizations. Fortunately, other organizations focus specifically on larger and brighter events.

There are a multitude of ways that one can attain information about a fireball. All the aforementioned surveys have employed the use of photometric data. In contrast, Peter Brown took data from the Department of Defense and the Department of Energy space-based systems in geostationary orbits. The original purpose of these systems is to detect signatures of explosions near Earth’s surface, but the system occasionally picks up false positives in the form of ablating bolides. Because the systems detect the amount of power released, Brown and others have used the systems to approximate a fireball’s energy. In a 2002 article published by *Nature*, Brown estimated the optical energies of around 300 bolides. Drawing from this data set and other existing data sets, Brown created compiled the following equation which relates bolide energy to the number of impacts on Earth each year.

$$\log N = a_0 - b_0 \log E \quad (2.1)$$

where N is the total number of objects colliding with earth each year and E is the respective energy of the sample in kilotons [2]. In this empirically derived equation, $a_0 = 0.5677 \pm 0.015$ while $b_0 = 0.90 \pm 0.03$. This relationship is known as a power law and will be useful to compare our Willamette D6 allsky data with.

2.2.2 The D6 Allsky Camera

The Willamette University D6 allsky camera was created in 2016 to capture images of fireballs streaking through the night sky. The aim of the project was to create an economically feasible and highly mobile observational system. The Willamette D6 allsky camera was constructed by Kyle McSwain alongside Dr. Jed Rembold in 2006. It is composed of a portable structure surrounding a state-of-the-art camera system along with necessary supporting devices, including a controlling Raspberry

Pi. [8]. The assembly resembles a Star Wars astromech droid, and acquired its name from this inspiration. The enclosure with visible camera is shown in Fig. 2.4. The D6 allsky camera is currently operational and has been gathering data since the summer of 2018. Below, we will discuss the design of the D6 allsky camera while also highlighting what makes it significant.



Figure 2.4: The Willamette D6 allsky camera (2016). Paired with a little imagination it resembles an astromech droid from Star Wars. **[We should get a new image of this, as it has the sealing cowl along the top now.]**

The components of the D6 allsky camera are comprised primarily of 5 different pieces: the camera housing, a CCD camera, a thermostat, a digitizer, and the Raspberry Pi to control everything. The acrylic dome and PVC shell form the exterior of our system. The dome itself is a transparent half sphere that sits on top of a PVC cylinder that holds the system together. Both act as a protective layer between the sensitive inside components and the outside environment. Without this feature, the system would be subject to rain, snow, dew, bug contamination, and other undesired effects.

The CCD camera is perhaps the most important feature of the system. The Watec 902H2 CCD camera uses a fish-eye lens to observe the entire visible night sky. It was chosen due to its extremely high sensitivity and resolution [14]. However, it should be noted that more expensive systems consisting of multiple cameras (like CAMS) provide an even higher resolution of fireball events.

Because of its constant use throughout the night, the system itself can get very warm and therefore needs some thermal regulation. The inside components are kept at a relatively constant temperature above the dew point by a thermostat and a fan system. The camera outputs an analog signal which requires the use of

a digitizer before it can be processed by the Raspberry Pi. The coaxial signal is sent to the digitizer before connecting to the Raspberry Pi via USB.

While there are several similarities in the composition of our allsky camera to existing systems, there are several key differences. The most prominent of these are the size, versatility, and cost of our system. Around the size of a basketball, the D6 allsky camera is extremely compact. Not only is it small, but it only relies on a single power chord for power. Because of this, the camera can be easily picked up and relocated to any setting that has a power source. The system has low power requirements and it should be possible to run from a battery if remote placement is desirable in the future. Other systems, such as several CAMS camera setups are rooted to extremely powerful computers that have little to no mobility as shown in Fig. 2.5.

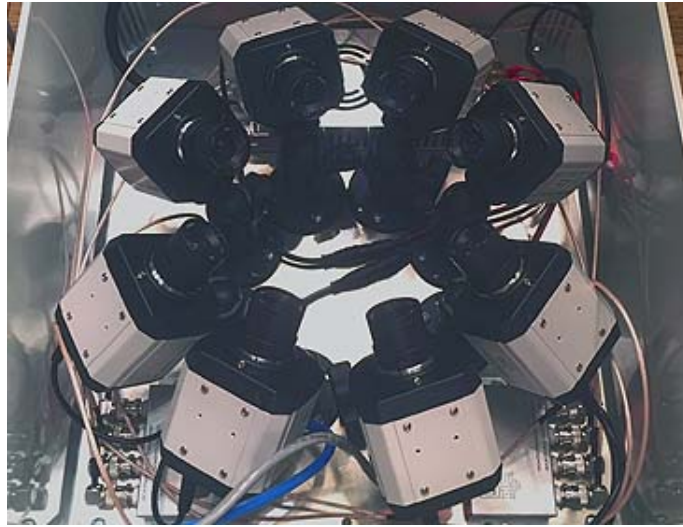


Figure 2.5: An entrenched alternative fireball observation system.

This presents issues related to being rooted in one location such as building renovation or sporadic light pollution issues. For example, if a tree were to grow near the camera, it would need to be chopped down or the entire system may need to be relocated. With the lightweight and portable D6 allsky camera, relocation is not a difficult process.

Additionally, the D6 allsky camera is a less expensive alternative to other fireball analysis tools. The ingenuity of running initial analysis on a microcomputer allows the D6 allsky camera to cost a fraction of what professional systems cost. Although large professional organizations produce copious amounts of wonderful data, in the field of fireball research, amateur systems outnumber professional systems 2 : 1 [3]. Providing a cost efficient alternative could be a great way to expand the field of fireball research and in turn provide a better understanding of the near-Earth objects in our solar system.

2.3 Photometry

After collecting videos of potential fireballs, next comes the task of analyzing the videos. Luke Russell, advised by Dr. Jed Rembold, wrote a photometry program in Python that allows us to get a calibrated light curve for a given video of a fireball. Simply running a fireball video through his interactive GUI allows us to access information about luminous properties of the fireball. However, limitations to our photometry must be taken into account. False positives, extinction, and other error factors must be accounted and corrected for while creating our fireball catalog.

2.3.1 Existing photometry tools

The primary photometric analysis tool that we use is a Photometry GUI in which a user interacts with a fireball video. After selecting both of these and entering in the known magnitude of the reference star, our photometry program automatically tracks the fireball throughout the following frames. By using Gaussian fits to the photometric data, the program is able to center its view on the fireball and determine its size throughout its path. Throughout this process, the video also sums the photon counts for each fireball pixel for each frame. This photon count gives us the magnitude of the fireball at a given point in its path. Doing this for each frame results in a light curve that shows the magnitude as a function of time, which yields the valuable light curve. From this light curve, we can then move on to further analysis.

2.3.2 False Positives and Atmospheric Extinction

While it is able to capture fireballs, the D6 AllSky camera still picks up a great deal of false positives. In an initial sample of over 700 videos, only 2 of them contained real events. The vast majority of the videos were of bugs crawling across the acrylic dome. Because the bugs are illuminated by nearby light, they appear to be bright spots traveling across the screen and thus the detection script mistakenly flags them as fireball events. Moreover, many bugs are featured in several videos as they have a tendency to move, stop somewhere, and move again. While this is somewhat problematic, we aim to implement several steps to limit the number of false positive bug cases. We aim to implement video length restrictions, and linear motion restrictions to limit the number of false positives.

In addition to bugs, other events such as airplanes, satellites, and Iridium flares provide false-positive videos. Their near-linear motion and bright presence are an instant trigger for the fireball detection. A larger problem in data analysis stems from the phenomena of atmospheric extinction. As shown in Figure 2.6, we

observe that when looking close to the horizon, light must travel through a larger volume of atmosphere than it does for an observation close to the zenith. Because the light travels through more atmosphere, more of the light is absorbed by gases or scattered by air particulates [5].



Figure 2.6: A depiction of atmospheric extinction’s effect on a sunset on a smokey day.

Part of this project will include accounting for atmospheric extinction in a secondary photometric analysis script. This will involve measuring the light intensity of known reference stars at various pixel locations throughout the night and comparing them to the real intensity values. This will allow us to have calibration values for different pixel locations throughout our camera’s frames, and thus will be applicable to any event’s analysis.

2.4 Parameters of Interest

As previously mentioned, the most critical component of our analysis is the final measured flux of our system. To recreate a plot similar to Fig. 1.1, we must have multiple events, estimated energies/masses of each event, total area of sky covered, and the total observation time. This section will detail how we will go about collecting this information.

2.4.1 Fireball Mass and Energy

Because of the limitations of using one camera system, we will make several key assumptions in determining any fireball’s initial mass and energy. Firstly, we

assume the velocity of the fireball. This will vary depending on the associated meteor shower. Additionally, we will assume a luminous efficiency, τ , on a similar basis. The following equation can be used to determine the optical energy of a fireball.

$$\tau = (0.1212 \pm 0.0043)E_0^{0.115 \pm 0.075}$$

Optical energy is useful, as it proved us a relationship to total fireball energy through the following equation.

$$E = 8.2508(E_0)^{0.885}$$

This is an empirically derived formula based on data taken by Peter Brown [2]. Now that we have a clear image of how to determine energy, we can transition to finding the initial mass of a given event. To do this, we will need the mass and radius of the fireball.

Paired with our assumption that fireballs on average have a density of _____ and a generally spherical shape, we can calculate the diameter using the following equation,

$$d = 2\left(\frac{3m}{4\pi\rho}\right)^{1/3}$$

where ρ represents the density of the fireball prior to entering the atmosphere. ①

The light curve outputted by our existing photometry GUI allows gives us light intensity at any given time. The luminosity is then related to the intensity of the fireball through the following formula,

$$I = \frac{L}{4\pi r^2}$$

where I is the intensity, L is the luminosity, and r is the radius of the object in question. The radius is easily attainable from the diameter. This luminosity will help us estimate the initial mass of the object in question. Equation 2.2 can be used to determine the initial mass of an ablating meteor,

$$m = \int \frac{2L}{\tau v^2} dt \quad (2.2)$$

where L is the luminosity, dt is the change in time, v is velocity, and τ is the luminous efficiency.

① I will definately still need help in this section

2.4.2 Time Observed

Each individual video or night snapshot taken by the Willamette D6 allsky camera is labeled with a time stamp. In addition to this useful time documentation, when operating, our allsky camera has a running log of its functions. This well-kept documentation allows us to keep track of the total observation time, a critical component of determining flux. However, there are certain limitations associated with the amount of time we can observe.

Primarily taking data in Salem, Oregon, the Willamette D6 allsky camera is subject to weather in the pacific northwest. Rain and cloudy nights limit the number of days we may take data. Luckily, the versatility of the camera system allows for it to be taken to alternative locations during school breaks or periods of bad weather.

2.4.3 Total Observation Area

One factor that is particularly difficult to deal with when considering flux is the area of the sky that is being observed at a given time. Using basic trigonometry, we can work out that:

$$\text{Sky Coverage} = \Omega(h + r)^2 \quad (2.3)$$

where Ω is the steradian, or solid angle from earth, h is the height above Earth's surface, and r is the radius of Earth. We will get a concrete steradian value by comparing angular distance to pixel distance in our camera frames. To expand on this, when a moon travels through the night's sky, it covers a angular distance in the sky. If it were to travel from one horizon directly through the zenith to the other horizon, it would have traveled an angular distance of 180 deg. If we know the angular distance traveled and the total number of pixels traversed, we can establish a relationship between the two and get a precise steradian value. Plugging this value into Eq. 2.3 yields a sky coverage area.

One might naively assume that the total observation area would remain consistent each night. However, one must consider clouds and fog when calculating the overall sky area covered. This consideration will be dealt with in our secondary analysis and is further discussed in the methods section. '

3 Methodology

To calculate the flux of fireballs from our D6 AllSky Camera, we need to find the total observation area, time, and the total number of events. In this section, we begin by describing in detail our methods for finding each of these properties. Some time will be spend discussing obstacles such as camera fish-eye effect and cloud interference. Additionally, we will delve into the structure of our database: our fundamental tool for secondary statistical analysis.

3.1 Calculating Total Observation Time

Each night the D6 AllSky camera observes, a program is run on the controlling Raspberry Pi that logs important information throughout the night. The observation log is a simple time-stamped text file that records what processes the system runs at various times in a given night. For instance, the observation log contains when each observation run begins (when the camera is set up initially), when the camera begins its analysis, when a new event is detected, and when the analysis goes to sleep, along with potential warnings or error messages that might come up.

To calculate the total observation time, we run a Python script that searches for the time associated with the start of each new analysis. After this time is recorded, we continue down the list of information until we find the time associated with that observation run's end. By subtracting the two times, we find the total observation time for that specific night. Performing this same method in a loop throughout all of the nights allows us to find how much time we spent observing on a given night. By summing up the total time observed over each night, we can attain the total observation time over the course of our data collection period.

A depiction of a portion of an observation log and our time analysis table can be seen in Figure 3.1. Note that while the information row that contains "New Observation Run Started" sounds as if it represents the start time, it does not. A new observation run begins once the the D6 Camera is placed outside

and turned on. Occasionally, the camera is set up while the sky is still too bright to begin actual video recordings. Therefore, we define our start time from a separate information row that states "A new night has arrived! Frame analysis beginning!". End times are determined by the information rows labeled "Day has come. Analysis going to sleep."

Time	Information
[2018/08/12 19:27:57.656]	[INFO]: New Observation Run Started
[2018/08/12 22:00:02.741]	[INFO]: A new night has arrived! Frame analysis beginning!
[2018/08/12 22:06:15.49]	[INFO]: New event detected.
[2018/08/12 22:06:19.839]	[INFO]: Event completed and video recording finished.
...	...
[2018/08/13 05:00:00.31]	[INFO]: Day has come. Analysis going to sleep.
[2018/08/13 18:56:57.536]	[INFO]: New Observation Run Started
[2018/08/13 22:00:01.102]	[INFO]: A new night has arrived! Frame analysis beginning!
...	...
[2018/08/13 05:00:00.31]	[INFO]: Day has come. Analysis going to sleep.

Start Time	End Time	Total Difference (sec)
[2018/08/12 22:00:02.741]	[2018/08/13 05:00:00.31]	25198
[2018/08/13 22:00:01.102]	[2018/08/13 05:00:00.31]	25199
...	...	

Figure 3.1: An example observation log and the resulting time analysis information

Occasionally, we run tests on different D6 AllSky Camera actions. For example, we could program it to shut down, restart, or take pictures. On August 29, 2018, one test resulted in no recorded "Day has come. Analysis going to sleep." log. This meant that we didn't have a correct log for that night's observation end time, leading to an error of a 14 day observation session. In actuality, the observation session was purely intended for testing and lasted less than one hour. Fringe cases like this raised red flags in our analysis and were looked at individually. In all cases, these testing sessions were not considered part of our real observation.

It is imperative that we save not only the total observing time over a given night, but also the start and end times. This information is crucial for the next section, where we calculate the area of sky observed on a given night.

3.2 Calculating Total Observation Area

One of the most difficult problems we needed to address for this project was determining what area of the sky the D6 AllSky Camera observed each night. In an ideal world, our camera would be able to see all parts of the observable

night sky, spanning across all horizons. However, due to optical limitations of our system and this is not possible. Figure 3.2 shows how our field of view is rectangular, as opposed to some other systems with a slightly more encompassing view. This means that even if we new the total angular coverage of our camera with respect to the horizon, we wouldn't be able to precisely estimate our total observation area. Nevertheless, determining the flux is a primary goal of this project, and is directly dependent on observation area.

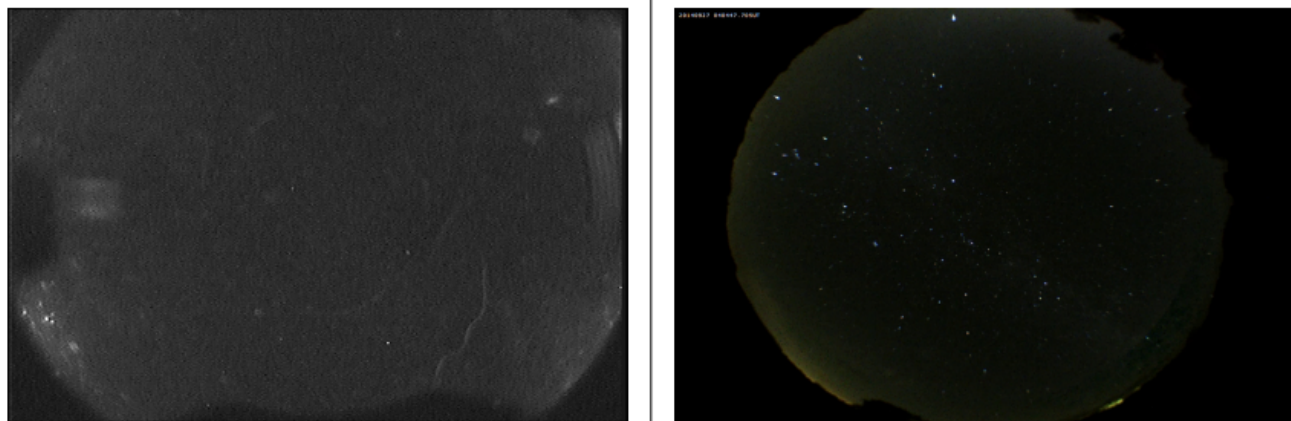


Figure 3.2: Left: our rectangular field of view. Right: A separate system's more complete circular view.

To make matters more complicated, while the use of a fisheye lens gets us more coverage of the sky, it also results in some distortion of the image. These distortions generally get worse the further an object is from zenith (directly overhead). The significance of this problem as related to our project stems from the fact that while 50% of our camera's pixels may be covered by clouds, this doesn't necessarily mean that 50% of the observable sky is covered. Therefore, we need some way of relating a given camera region to some observable distance.

To do this, we used observations of the Moon and various stars to calculate angular distance to pixel ratios for different regions of our camera. This solution addresses the need to account for a camera fish-eye effect by assigning different fields-of-view to different pixel observational areas. By correlating certain pixels with specific angular distances, we can analyze the available sky coverage by summing across all pixels. To fully understand the methodology behind calculating the total observation area, one must understand how angular separation serves a role in area coverage.

3.2.1 Angular Separation

Consider two objects, both of which are visible to you, an observer. One simple way to compare the two objects is by measuring the direct distance between them. However, this isn't always known, especially when the objects are extremely far away. An alternative way to compare the two would be to imagine two straight lines extending from your location to both objects. Because both lines are extending from the same location, we can calculate the associated angle between the two lines, known as the angular separation. This angular separation may change as you move locations if the objects are nearby. However, if both objects are extremely far away, no small change in observer location will change the angular separation significantly. We can essentially treat the two objects as points on a celestial sphere, with equal radial distance from the observer. Angles are a natural way of measuring displacement on a celestial sphere.

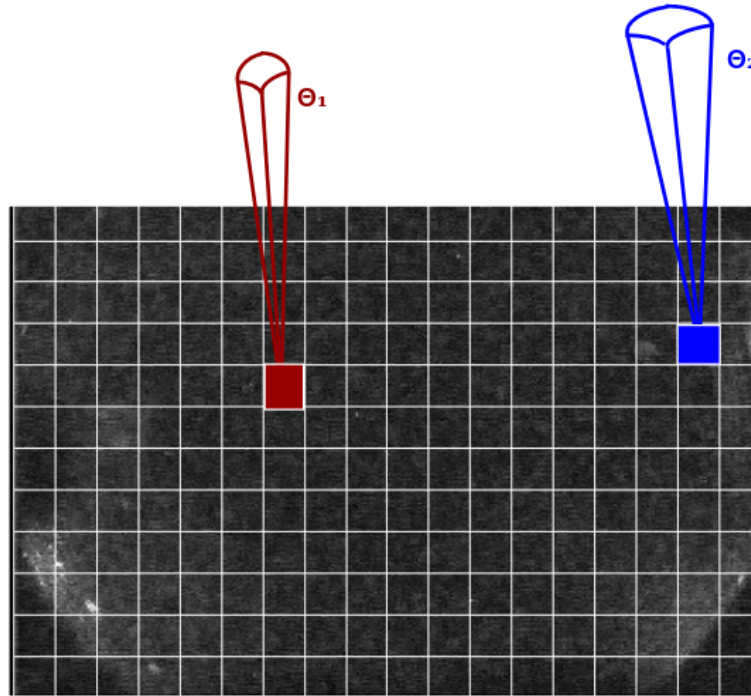


Figure 3.3: A theoretical depiction of two separate pixel regions' corresponding observable surface areas. These areas are dependent on the angular coverage of that pixel region.

We can apply this concept and principle to calculate angular distances between stars and other celestial objects. This intuitively makes sense because we don't necessarily know the extremely large distances to stars or between them. We can therefore treat them like points on a celestial sphere and measure the angles between them. Relating an angular distance to a pixel distance allows us to

determine angular separation per pixel within that general pixel region. By taking data on the angular and pixel separations between celestial objects across different pixel regions, we can estimate angular coverage in separate parts of our field of view independently.

We can eventually sum our findings across all pixel regions to calculate our camera's total angular coverage. Assuming that the fireballs are ablating in our atmosphere at a given height, we can then apply our angular measurements to attain an observational surface area as desired. Figure 3.3 depicts a theoretical relationship between different pixel regions representing different angular areas. We see that the surface area used in flux calculations is a slightly curved base of a rectangular pyramid, where the tip of that pyramid represents a pixel or pixel region. Importantly, to calculate angular separation between many objects, we need to first have a database of objects to compare.

3.2.2 Collecting a Star Catalog

The D6 AllSky Camera not only captures video footage of fireballs, it also takes snapshots (pictures) throughout an observation night to aid in the larger fireball analysis vision. The motivation behind this is primarily to check cloud coverage, but these images can store other important information. Stars are visible in many D6 AllSky Camera's snapshots. The first step in creating a catalog of star information is recognizing stars within snapshots. We went about this by cleaning the image of hot spots, thresholding the image, and using the `SimpleBlobDetector` to capture star locations. All of these processes are coded and executed in Python.

Hot Pixels and the Dark Frame

Hot pixels are flawed pixels within a camera that always provide a significant positive photon count, even when the camera is exposed to complete darkness. These pixels are problematic when trying to locate stars, as they don't represent any real physical object. Fortunately, this source of error can be accounted for by taking an image while the lens of a camera is covered. This is called a dark frame, because the lens is not exposed to light. Ideally the dark frame displays a black image, but most cameras will have a few hot pixels. By subtracting this dark frame, represented by a 2-dimensional array of values ranging from 0 to 255, we are able to remove the hot pixel's effect from all other frames. Figure 3.4 represents the an image, the dark frame, and that first image subtracted by the dark frame.

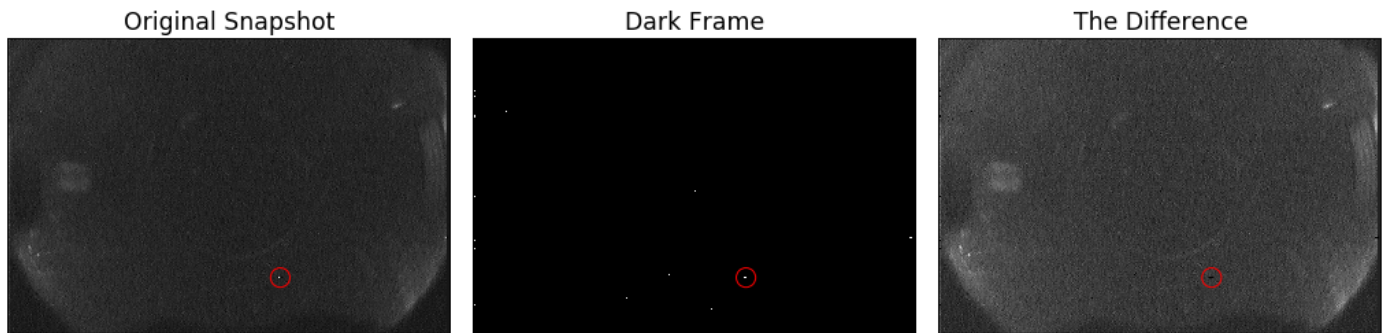


Figure 3.4: From left to right: an unaltered snapshot, the dark frame, and the dark frame subtracted from the original snapshot. Note the region enclosed depicts a clear area of difference between the images.

Thresholding

Once these hot pixels are subtracted from a given frame of interest, the next step is to enact some type of threshold. In this case, a threshold represents a cutoff photon brightness for every pixel. If a pixel has a count that is lower than the threshold, that photon count is changed to zero, which is pure black. Alternatively, if a pixel has a count that is higher, the count becomes 255, or pure white.

Thresholding serves the important role of simplifying an image to a purely black and white, on or off type image. The necessary threshold for different images differed in accordance with the amount of surrounding light. For the purposes of this project, we used an initial threshold of 140. If 140 was not a sufficient threshold, this value was increased in increments of 5 until the resulting image appeared to properly segment between open sky and clouds. For example, images that contained the Moon, a bright source that tends to wash out neighboring pixels, needed higher threshold values than images without. Figure 3.5 shows how different images may require different thresholds based on their original brightness. The presence of clouds and/or the moon also plays a significant role in this process.

SimpleBlobDetector and Stellarium

Next, we use the `SimpleBlobDetector` function from the `CV2` library to detect potential stars. This function is able to read an image and scan for objects that meet your specified parameters. Variable parameters include, but are not limited to, size (in pixels), circularity, convexity, and color. In this instance, the color filter has a value of 255. We filter based on area, scanning for stars between 1 and 20 pixels in size. The star must lastly have a minimum circularity value of 0.5. When enacted, this function scans the picture and returns a list of detected

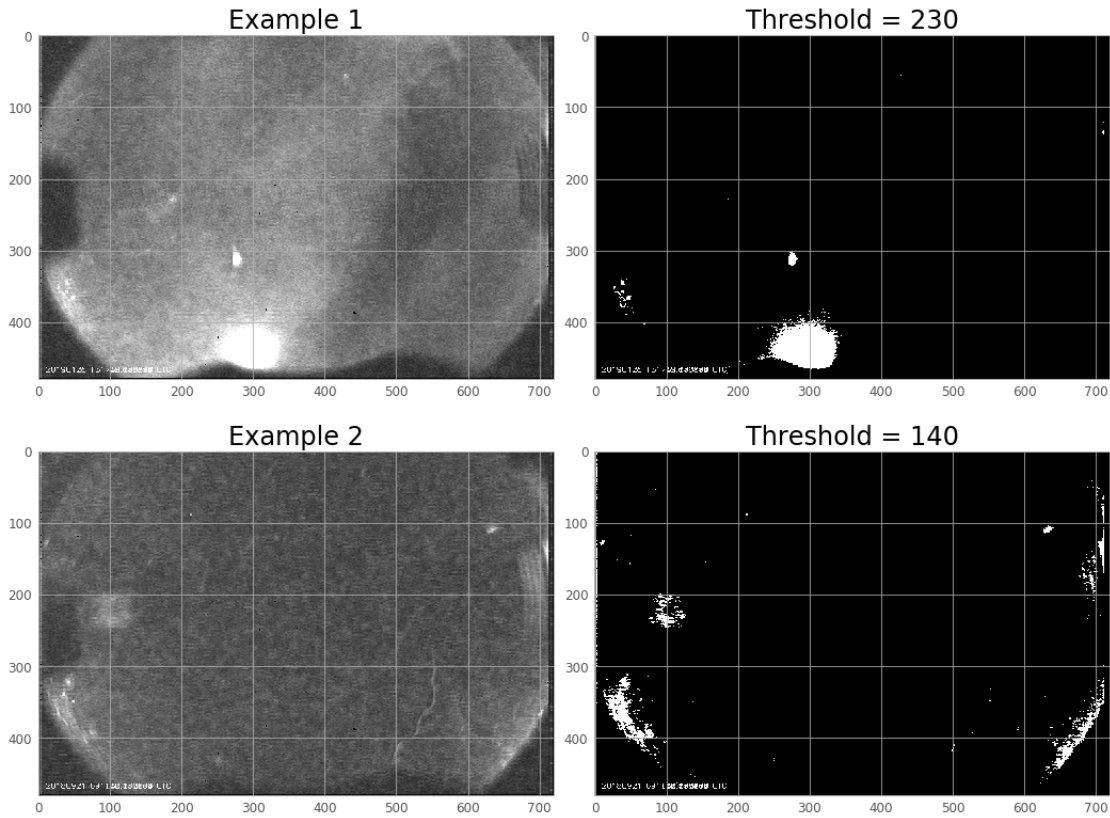


Figure 3.5: Two separate D6 snapshots alongside their thresholded images. Note the differences in their respective threshold cutoff values.

locations where all of these parameters are met. Using simple plotting functions, we can overlay these locations with the original image.

At this point, we have a list of potential object locations, but no foreseeable way of identifying the real ones. As luck would have it, *Stellarium*, a free astronomy software allows users to view a clear night sky from any point on earth at any time. Additionally, this interactive software stores information about the stars' names and other important information. By viewing *Stellarium* and a D6 AllSky Snapshot and comparing the two, we are able to recognize which objects are real and which are false positives. While hot pixels remove some false positives, random noise causes some pixels (or pixel groups) to resemble the size and color of stars. Because each snapshot is labeled with the corresponding data and time, this method proved sufficient in identifying celestial objects from images. A depiction of this process can be seen in Figure 3.6. When comparing the two images, it should be clear that the objects numbered 17, 16, 19, and 21 correspond to Betelgeuse, Aldebaran, Capella, and Polaris. Also note that in the image, there are several recognized objects that don't have any celestial counterpart. These are

all false positives. Similarly, there are cases in which the `SimpleBlobDetector` is not able to recognize an object that appears in a snapshot.

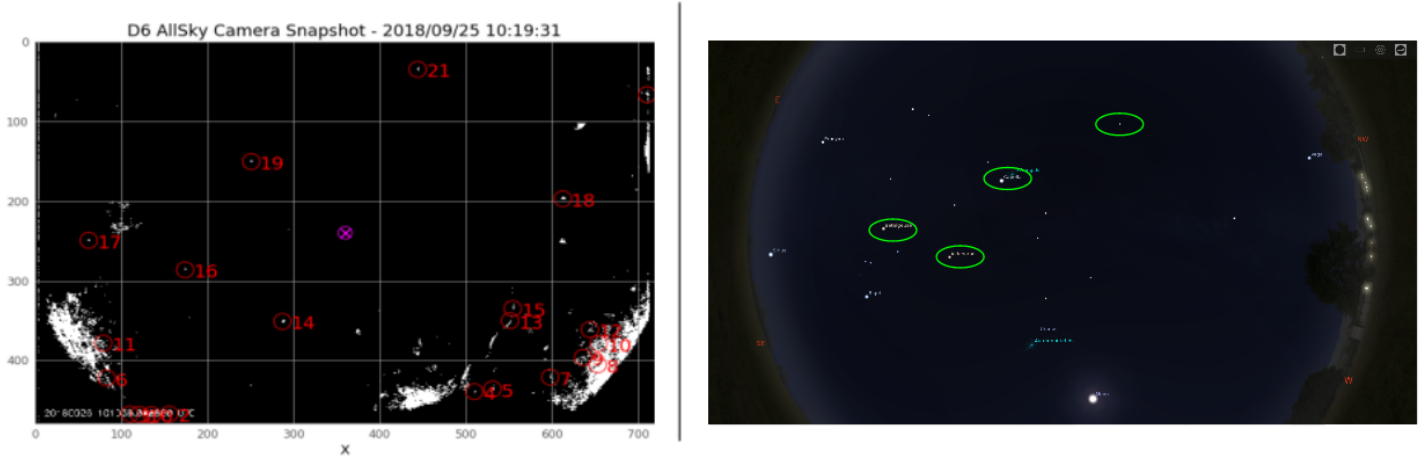


Figure 3.6: A D6 AllSky snapshot (left) alongside a Stellarium display (right). We compare the two to find recognized stars that are found in both images. These are circled in lime green in the Stellarium display.

Once an object in a given frame is matched to a name, we used the Python library `Astroquery` and its function `Vizier` to automatically look up the star's right ascension, declination, V-magnitude, azimuth, and elevation. This, combined with the star's pixel location, time, and original snapshot's file name, was added to our star catalog as a singular data row.

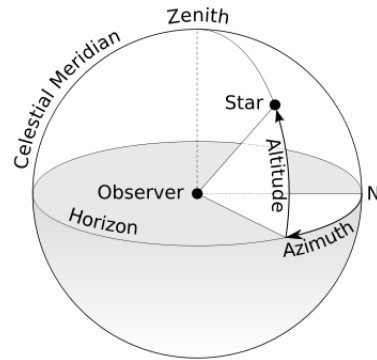


Figure 3.7: A visualization of altitude and azimuth measurements on a unit sphere. Note that a positive azimuth angular measurement moves from North towards East.

Azimuth and Elevation

Each star has several inherent properties such as magnitude, right ascension, and declination. The later two represent coordinates that locate a star on the celestial sphere. Other properties, such as a star's azimuth and elevation change over time and vary dependent on the observers location. These two properties indicate a star's position in the sky relative to an observer and act similarly to spherical coordinates.

Figure 3.7 shows how altitude and azimuth coordinates are determined. Note that the azimuth is an angle with respect to North. A move closer to a pure East direction reflects a positive azimuth angle, whereas a move in the West direction reflects a negative azimuth angle. Through finding the azimuth and elevation of a star, we can assign a star a 3-D coordinate value that lays on a unit sphere. We can then calculate the angular separation between two 3-D coordinates by taking advantage of properties of the dot product:

$$\vec{A} \cdot \vec{B} = |\vec{A}||\vec{B}| \cos(\theta)$$

where θ represents the angular separation between the two unit vectors. Because we know that both vectors representing star locations will fall on a unit sphere, their magnitude is 1. Using this knowledge, we may transform the above equation to:

$$\theta = \arccos(\vec{A} \cdot \vec{B})$$

Given this formula we calculate the angular distance that separates two different celestial objects. The average angular distance per pixel measurement is determined by taking the angular distance divided by the pixel distance between the two celestial objects' pixel locations. This equation is important and can be seen the following equation:

$$\text{Avg. Angular Distance per Pixel} = \frac{\theta}{\text{pixel separation}}$$

3.2.3 Calculating Angular Areas

The D6 AllSky camera is a versatile system and it's orientation and position can change slightly from night to night. Because of this, there are several considerations that must be accounted for when calculating angular distance per pixel across different camera regions. The D6 AllSky Camera is a versatile observation tool, and it therefore takes observations in slightly different locations each time it is put out. A change in observation location could mean that if one night a star is

located at pixel value (10, 10), and the next night it could be located at (94, 134). We have developed a method for calculating angular separation per pixel data points that account for this consideration.

Comparing Objects from the same Night

The star catalog stores information about celestial objects over the course of all observations. Using constraints from the Time Analysis information (start time, end time, time elapsed), we can isolate rows within the star catalog from a specific night. After creating this subsection, we can then use our described method to calculate the angular separation per pixel for every combination of two objects. One might question where the data behind this angular distance per pixel should be located. After all, there are two different object locations used to calculate the value. Our strategy was to locate the point in between the two objects. Figure 3.8 depicts these combinations along with the locations of the angular separation per pixel represented as white dots.

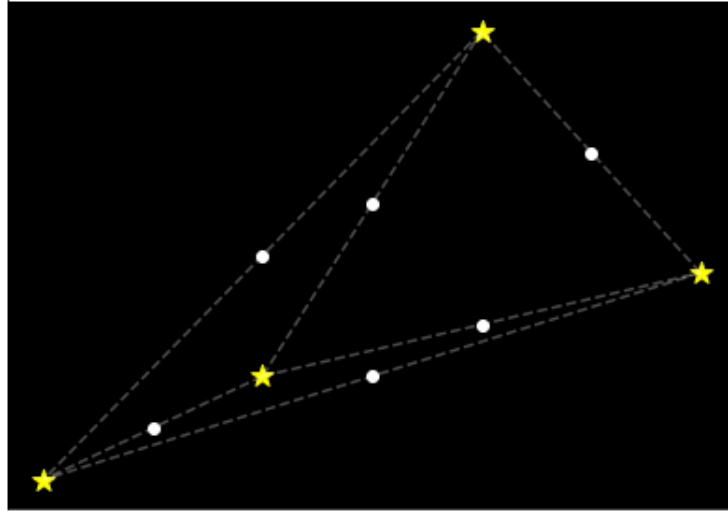


Figure 3.8: A set of four stars (yellow) that could be compared to calculate six separate angular distance per pixel data points (white).

Figure 3.8 gives a general depiction of our method on a much smaller scale. Note that when comparing objects from this subsection of the star catalog, we are not limited to only comparing different stars. As an object moves throughout the night sky, its azimuth and elevation change along with its pixel location. We can thus treat each individual observation as a unique object, even comparing between the same object at different times throughout the night. This creates many more combinations than if we were to only consider unique stars.

After calculating all potential angular separation per pixel values alongside their location information, we may move on to calculating average angular separation per pixel in different camera regions. For the sake of dividing our field of view into different pixel regions, we split up our 720×480 pixel camera frame into 40×40 pixel squares. This also allows us to observe the difference in angular distance per pixel ratios across the entire field of view

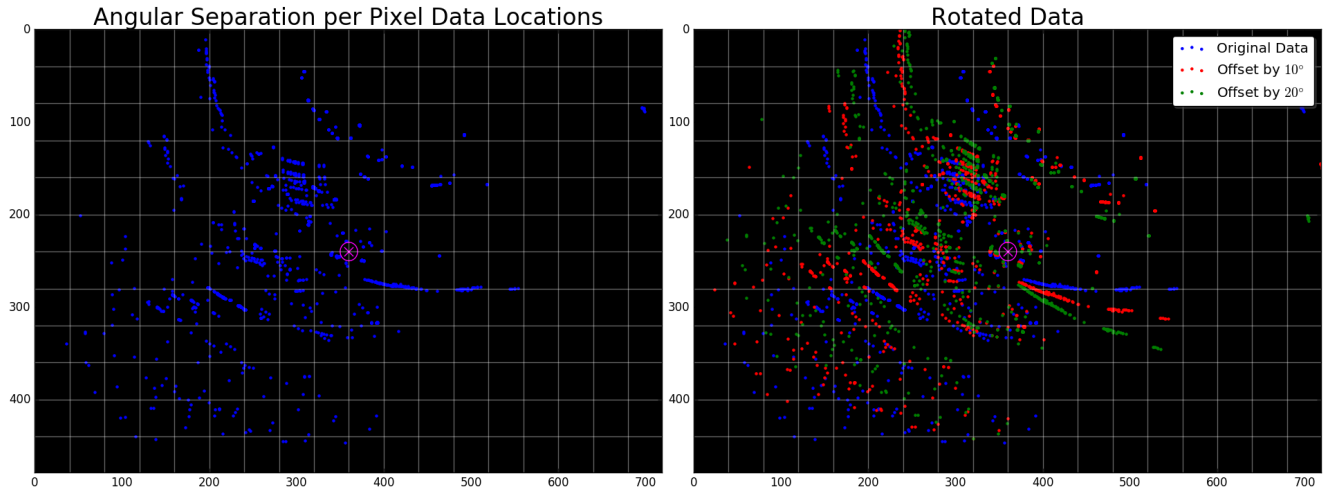


Figure 3.9: Left: our angular separation per pixel data set. Right: that same data set with two rotated and appended data sets.

There are 216 total pixel regions and only so many angular separation per pixel data points. Some pixel regions that do not contain any data points. By assuming that our field of view has rotational symmetry, we can rotate and append new data to our set. Figure 3.9 shows one data set that is rotated twice in 10° increments. For the sake of this project, we rotated our original data 360° in 5° . This allowed us to fill in all of the empty regions and multiply our data set quantity by over 50. All angular separation per pixel measurements located inside a given square were then averaged over to determine that square's average angular separation per pixel value.

3.3 Calculating Cloud Coverage

The D6 AllSky Camera currently does not always remain outside. For the most part, our camera was only placed outside during nights where observation conditions were promising. Because we cannot see or properly analyze fireball events that happen behind clouds, we cannot count cloudy regions as observable areas. As mentioned previously, the D6 AllSky Camera takes several snapshots of the night sky systematically throughout an observing session. Specifically, it currently

takes images every 30 minutes. By using thresholding, we have seen how we can determine which pixels qualify as not observable areas. The threshold value that we used in this step was a photon value of 90.

We chose a different threshold pixel value for this cloud analysis than the threshold in our star recognition program. While thresholding for star recognition, we want to minimize the number of false positives. The more distinguishable bright small objects in a given frame, (ex: pixels on the edge of a cloud) the larger number of objects that meet our `SimpleBlobDetector` parameters. This adds a hefty bulk of time sifting through false positive objects. While trying to find clouds, we don't want to get rid of hazy cloud boundaries, so we utilize a lower threshold.

Unfortunately, some pixels that fall within a broad cloud area are not recognized through this process. The solution to this problem lies in the `OpenCV` functions `MORPH_CLOSE` and `MORPH_ERODE`. The first of these functions fills in regions of empty space that are next to filled in space. This is helpful in closing gaps between pixels that represent clouds. However, because the edges of the clouds are expanded in this process, we must subsequently perform a `MORPH_ERODE` that works in the opposite fashion. Once a hole is completely closed, there is no space within a cloud for the eroding function to open up, hence providing a satisfying answer to the cloud predicament. The difference between a thresholded image and the subsequently closed/eroded image can be seen in the upper-right and lower-left panels of Fig. 3.10. We may observe that this method fills in a vast majority of the small dark holes in the thresholded image.

After this successful threshold and subsequent closing/eroding process is complete, the next step is implementing the relationships between pixels and angular distance. By assigning the correct regional angular separation per pixel value to each pixel within a cloud, we are able to estimate the angular area that cloud covers. Figure 3.10 shows the processes taken in calculating the area occupied by clouds. Note that both a filling and eroding function was used to attain the lower left image. The observable area during that time is the cloud coverage subtracted from the total observation area.

This process is performed for each snapshot. In creating our average area observed calculations, we assume that the sky retains that same amount of cloud coverage for the 15 minutes prior to and 15 minutes after the snapshot. While this isn't precise down to the exact minute, over many observations, the number of over-estimations and under-estimations should average out and yield an accurate observational area.

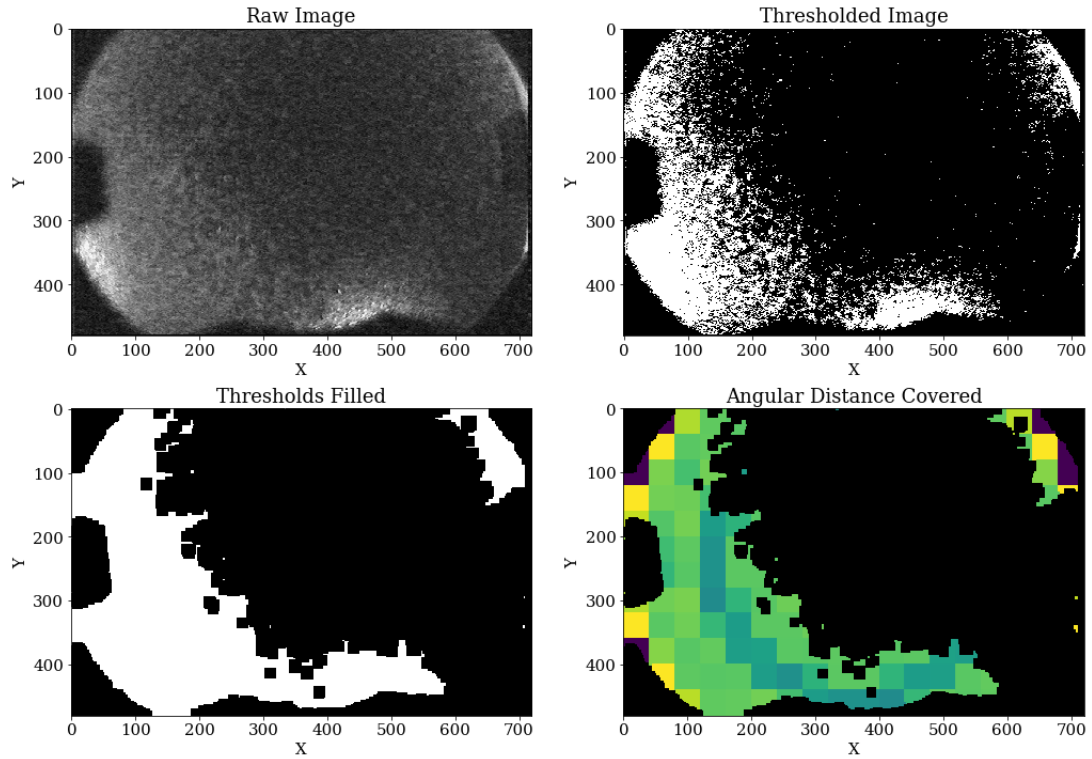


Figure 3.10: From top left to bottom right: a cloudy D6 snapshot, that snapshot with a threshold applied, the thresholded image after a close/erode function was applied, the subsequent pixels assigned angular distance per pixel measurements. The angular distance per pixel map is discussed more thoroughly in the Data chapter.

4 Data

Because there is intrinsic variability in the number of near-Earth objects colliding with Earth’s atmosphere from night to night, a sufficiently large data sample plays a vital role in estimating an average flux. This chapter details our data sample, specifically with respect to the time, observable area, and fireball distributions^①. To assess the overall capabilities of our system, we also delve into the data behind our star catalog, previously used for total observable area calculations. This chapter provides the raw data and overall distribution and shape of the data. Further analysis and interpretation of the data can be found in Chapter 5.

4.1 Time Distributions

While the D6 AllSky Camera has a protective watertight shell, it is currently not always placed outside for nightly observations due to precaution and convenience. Due to Oregon’s climate, we often leave our observation system inside. There have been a total of 221 days between August 27, 2018, the beginning of Willamette’s academic year, and May 6, 2019. Out of those 221 days, we have observed during 34 nights, for a total of 291.87 hours.

When outside, the D6 AllSky Camera automatically begins observation runs when the sky is dark enough to take videos of without fear of over-saturation. As the sky gets brighter when sunrise approaches, the camera automatically shuts off, ending the observation session. This brightness constraint means that the total observation time changes from night to night. During observation nights, we observed for an average of 8.584 hours per night. The shortest observation session lasted 7 hours while the longest lasted 11^② hours.

Figure 4.1 displays the individual nights that we observed throughout the academic calendar. In addition to plotting our observation dates and each session’s

^①What is this referring to?

^②Interesting. That is surprisingly long and a little suspicious to me.

total observing time, we have indicated dates of meteor showers visible in Salem, Oregon. During the months of October and November, we observed on nights of the Orionid and Leonid showers respectively.

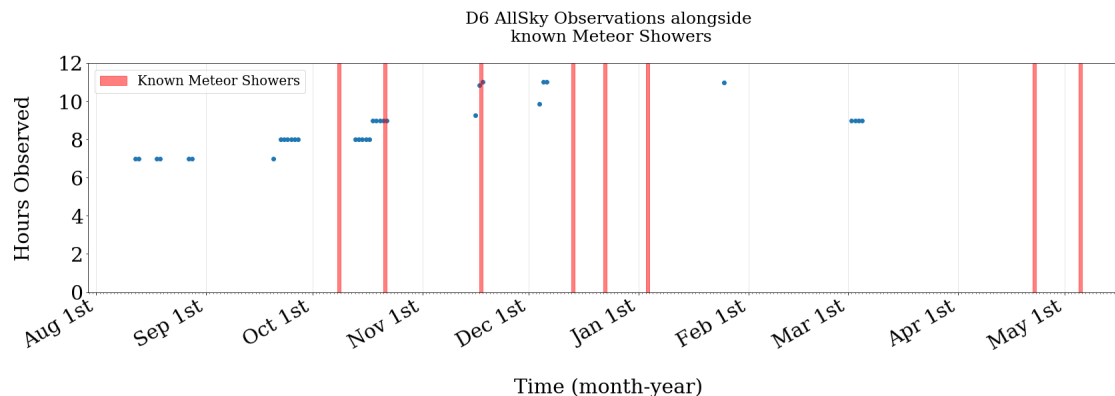


Figure 4.1: A plot of all D6 AllSky observation dates and recognized meteor showers within the 2018 – 2019 academic calendar year.[\[Comment on major feature just like you did in the text.\]](#)

4.2 Coverage Distributions

As described in the methodology section, to calculate the angular distance per pixel for a given location, we needed two different celestial object measurements.^③ By taking the angular separation between the two, we designated the ratio to be at the midpoint between both locations. In total, we used 2638 different comparisons to compile our angular distance per pixel dataset. Figure 4.2 shows all of these points, each colored with their respective angular separation per pixel ratio.

One may note that Figure 4.2 shows many data points, but they do not span the entirety of the camera field. There are many regions with no data points. Because^④ has a view that is symmetric about the azimuth, we rotated all of our data points by a fixed quantity and appended them to the current data set. This assumption of azimuthal symmetry allowed us to attain more complete data coverage without sacrificing data quality. By rotating and appending in sequences of 5° in a full unit circle, we were able to increase the number of data points by a magnitude of 71.53. From this point we were able to then bin^⑤ the data and create Fig 4.3.^⑥

^③Did you need two objects or did you need two measurements? This sounds like measurements which then conflicts with the next sentence.

^④missing word?

^⑤Why bin the data?

^⑥You need another sentence say commenting on what is shown in that figure.

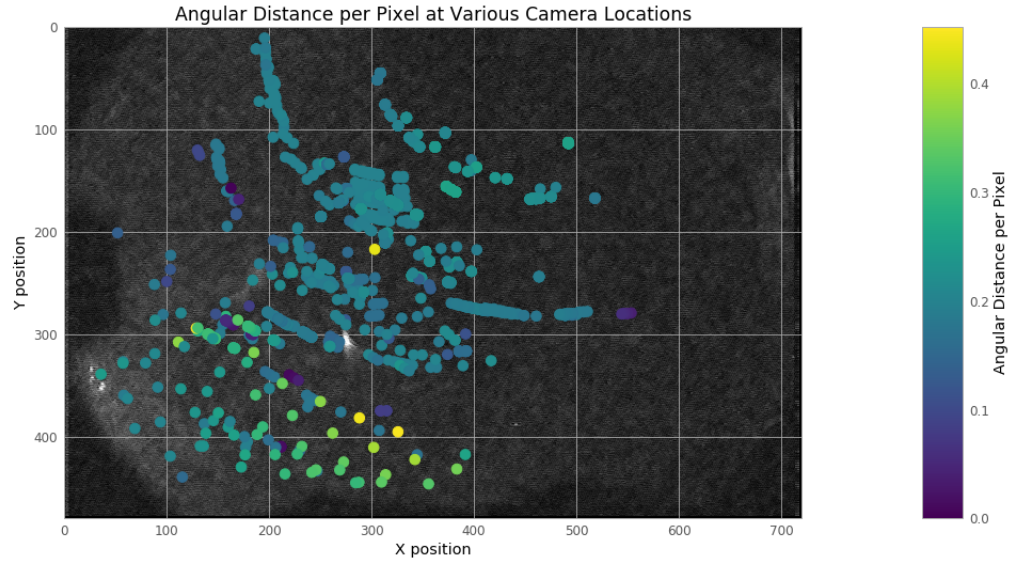


Figure 4.2: A plot of angular distance per pixel measurements from celestial comparisons. [Why are they grouped the way they are? How do you feel about the coverage? Comment more about the plot itself! Also, this plot badly needs axes and label sizes that match the plot below, especially when they are on the same page like this!]

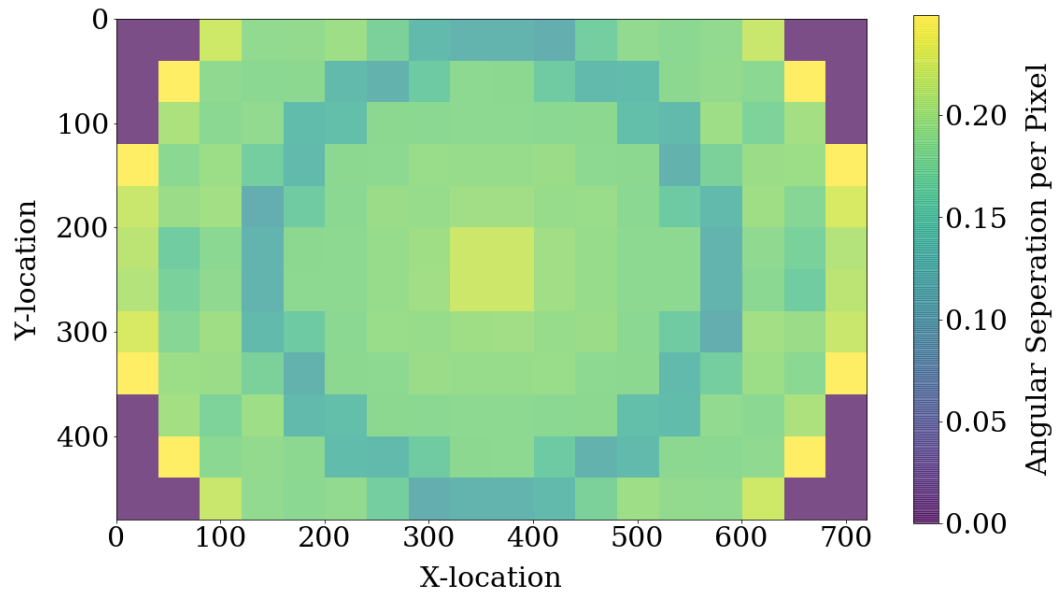


Figure 4.3: Average angular separation per pixel for different camera pixel regions.

As described in the Background chapter, we used our measured solid angles for

each region to calculate individual rectangular pyramid-created sky areas^⑦ at a fixed radius of 11.4 km. Our measured total areal coverage was $\sim 58\,974.88\text{ km}^2$.

As some nights were cloudy and others clear, the observable area fluctuated from night to night. Figure 4.4 summarizes the total observation time and the average observable area for each of our observation months.

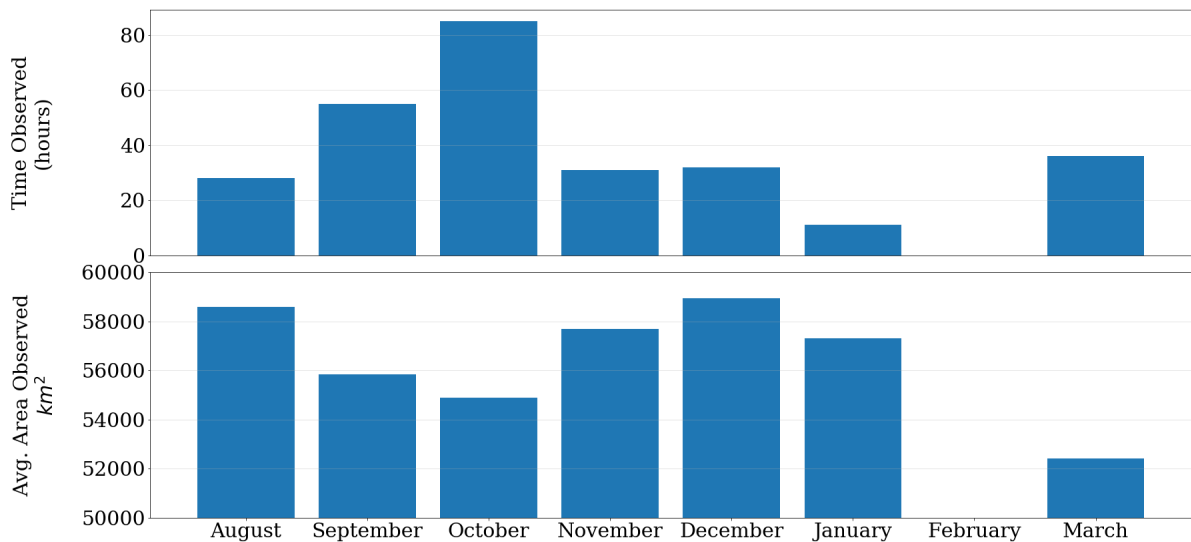


Figure 4.4: A plot of total observation time and average observable area for each month. [Say more! Why include this plot!? Any interesting features?]

Our average observable area across all observations was $\sim 56\,012.03\text{ km}^2$. This value, along with our total observation time and number of events was used to determine the overall average flux.

4.3 Detected Fireballs

In total, the D6 AllSky Camera captured a total of 1095 videos. Of those 1095, only 6 were identified as real fireballs.^⑧ A depiction of the locations of these fireballs is shown in Figure 4.5.^⑨

^⑦Got to come up with a better name or description than that
^⑧Lordy this sounds terrible. Probably need to comment on why the trend was like this.
^⑨Need a sentence commenting on what this image shows.

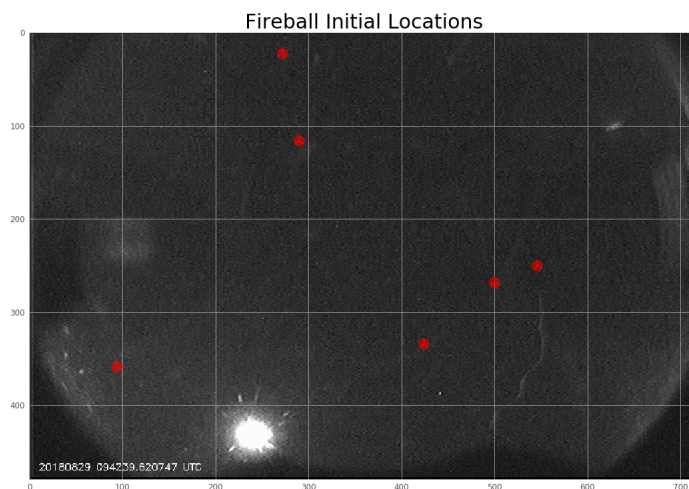


Figure 4.5: The initial pixel locations of all detected fireballs. [So what? Why should I care or what is interesting about this?]

Of the 6 fireballs, 3 were found within 24 hours of the Leonid meteor shower while 1 more was found during the Orionid meteor shower.

Unfortunately, the photometry program used to analyze fireball light-curves had issues processing each of these cases, and there was not enough time to troubleshoot and fix that program. Therefore, we do not have calibrated luminosities for our observed fireballs and can not make a prediction of their energy or mass at the moment.

4.4 Camera Capabilities

As described in Chapter 3, the star catalog consists of recognized stars from the D6 AllSky Camera's snapshots. In a catalog containing a total of 317 rows¹⁰ we observed an average of 1.396 stars per snapshot containing at least one star. In total, the system took 1642 snapshots, and 279 of them contained identifiable celestial objects (stars or the moon). Within those 227 videos, we captured information on 13 unique objects. Of these objects, the brightest had a visible

¹⁰stars?

apparent magnitude of 2. This star is Alpheratz.^⑪

^⑪What about the dimmest? That is far more interesting to us as it sets a sort of lower scale on the dimmest objects that we could expect to see and detect.

5 Conclusion

Calculating average flux only depends on three variables. Although this calculation appears simple, estimating an average observational area can be extremely difficult. Through establishing a versatile^① method for calculating observable sky area, we can now estimate the D6 AllSky Camera's average flux and compare it to other systems. As of this point, our data sample is too small to make any conclusive claims. As such, there are still steps that need to be taken to truly assess the feasibility of using the D6 AllSky Camera in fireball research. This section will detail some of our self-assessed points of critique as well as shed light on some possible future research directions.

5.1 Results

[I'd really put this at the end of the data section. It feels very out of place here where everything else is more about critique and future directions.] After attaining the number of events, total observation time, and average observational area, we found that the D6 AllSky Camera had an average flux of $\approx 3.86 \times 10^{-7} \text{ h}^{-1} \text{ km}^{-2}$. Table 5.1 displays this value alongside the values that contributed to our flux calculation. As a point of comparison, Dr. Jed Rembold measured an average flux rate of $1.09 \times 10^{-7} \text{ h}^{-1} \text{ km}^{-2}$ when studying meteor impacts on the Moon. Clearly the Moon and Earth are inherently two different objects with different gravitational effects. However they have similar locations within our solar system, and thus their average flux rates should share some resemblance. The fact that the D6 AllSky Camera's fireball flux rate is of the same order of magnitude as research in the same field, we remain cautiously optimistic about the feasibility of our camera system.^②

^①You've used this word before, but I think you need to better clarify what it means in this context?

^②This sentence feels really choppy? Or is missing a word?

	Value	Units
Number of Events	6	events
Average Area	56,012.03	km ²
Total Time	291.87	hr
Flux	3.86×10^{-7}	hr ⁻¹ km ⁻²

Table 5.1: A display of our average flux rate alongside contributing variables. [Use booktabs for all tables, and eliminate vertical rules. Also, if you are going to shade, I'd go light shades of gray only. Also, it seems like if you are going to make the comparison you did above to the lunar data, you should just bake the units into each entry in this table and include a column for the lunar values as a point of comparison.]

5.2 Critique

While there are a multitude of positives to take away from this research, there are many areas of improvement as well. The main critique of our work stems from a lack of sufficient data. Flux estimates rely on a robust data sample, something that we were not able to attain this academic year. In the Fall of 2018, we also experienced some camera difficulties that led to data that was incompatible with our Photometry GUI software.^③

5.2.1 Data Size

Throughout the history of fireball research, a sufficient data size has proven to be a vital characteristic of most notable findings. In 1996, the Canadian camera network published a detailed analysis of the 259 fireballs captured by their system [4]. Peter Brown, one of the most recognized figures in fireball research, released a paper in 2002 that detailed an analysis of 300 fireballs as captured by the department of energy and defense^④ [2]. Surveys like these two have the luxury of calculating detailed flux estimates for fireballs with different energies or masses.^⑤ By binning fireballs that share similar properties, these research groups can measure relationships between likelihood of impact and fireball properties. The value of average flux is often replaced then by the more detailed fireball energy distribution. This makes comparing our system to existing systems slightly more difficult since net fireball flux rates are not always so widely reported.

^③I'm not sure these are camera difficulties or just being a different camera than what Photometry was tested predominantly with. That said, we are of course having extra noisy camera issues at the moment that could be acknowledged.

^④Shouldn't that be capitalized?

^⑤Why do they and not us?

Our system has captured a small fraction of the events found in the aforementioned research papers.^⑥ Our lack of data isn't necessarily due to a lack of camera capability, and likely has to do with the total time observed. Observing a total of 34 nights out of a possible 221 yields a ratio of observing a little less than 16% of nights. This low ratio is partially due to poor weather. However, there were also nights where the camera was not placed outside due to scheduling complications.^⑦ Observing for more nights and capturing a larger number of fireball events will allow for more points of comparison to existing surveys. This will in turn allow us to gain a stronger understanding of how our camera system compares to current professional systems.

5.2.2 Camera Difficulties

In the summer before the 2018-2019 academic calendar, the D6 AllSky Camera began having difficulty focusing on the night sky.^⑧ This led to images and videos containing lots of systematic noise. Figure 5.1 depicts the difference between an image with low and high noise. Both images were taken with our same camera. From these two images, it is clear that images and videos with high noise are more difficult to analyze.^⑨ Coincidentally, the photometry program created by Luke Russell in 2017 and 2018 was created using test snapshots and videos taken without any noise issues.^⑩ The subsequent problem with noise led to an incompatibility with the photometry software. Specifically, the part of the program that tracked the fireball location across frames was unable to do so when noisy pixels were found nearby the fireball.

Not only was the camera noise problematic for photometric analysis, but it also made star recognition more difficult. In a majority of the snapshots captured by the D6 AllSky Camera, we were unable to recognize any celestial objects.^⑪ A lower-noise level would allow us to recognize more stars which would add to our star catalog, and increase the number of data points used to determine observable area. There is also a chance that we could detect dimmer stars with less-noisy data, leading to a stronger understanding of our camera's capabilities.

^⑥Not the same events surely. And that is how this reads.

^⑦Sentence about this becoming less of an issue as we finalize and become more confident with the camera software and leave it out in the field to observe for large tracts of time.

^⑧It was later than this. The problem really only got super bad heading into this Spring.

^⑨Reasons why?

^⑩I don't think it is related to this. It was having issues tracking them even before the noise problems.

^⑪A majority? How many are we talking? (That aren't also cloudy and so could have a chance at seeing something.

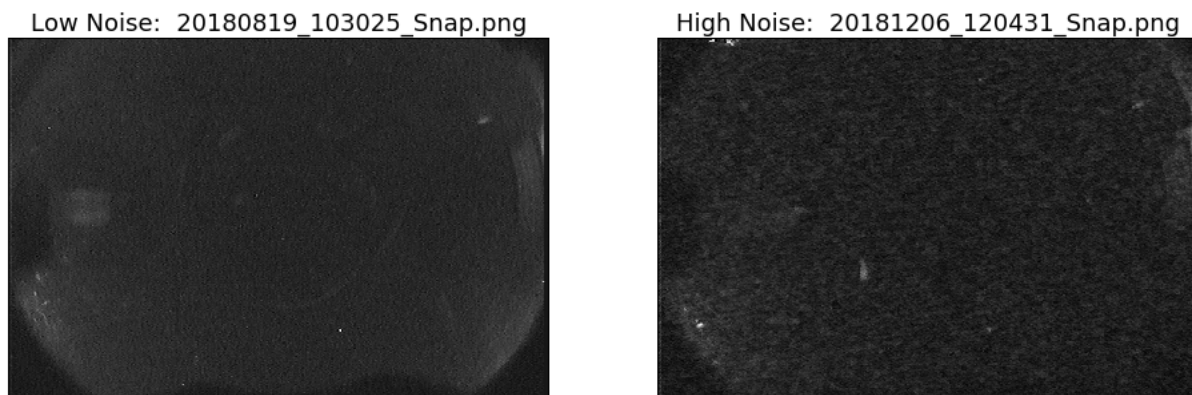


Figure 5.1: A D6 snapshot comparison of low and high noise. [This caption is pathetic. :) Comment on it! Also, you should get your sizing such that the images do not extend beyond the text width.]

5.3 Outlook

Moving forward, the most important thing to focus on is data collection. Once the problem with unusually high volumes of systematic noise is dealt with, we will have most of the framework established to create a running fireball catalog. However, we will need to create a script that estimates a fireball's properties (energy, mass, size) given the photometry program's outputted light curve. This project however should be fairly straightforward and will utilize the equations described in this paper's background chapter.¹²

While a singular camera can serve an important role in fireball research, systems with multiple cameras stationed in different locations have certain benefits. They allow for the triangulation of a given fireball which can then lead to more accurate velocity and position estimates. With multiple systems, we could also estimate a fireball's orbital elements, and thus determine from whence it originated. Next year, we hope to construct another D6 AllSky camera that will lead to more precise data collection. The prospect of a secondary system is exciting and will hopefully help prove that the D6 AllSky camera is a desirable alternative in fireball research.¹³

[You need to do a careful read through of your works cited and make sure they are rendering properly. Some seem to have empty fields that need fixing. For others it is not clear at all what sort of reference it even is. What is up with the one that just in the name of the camera?]

¹²Might as well reference them directly

¹³Technically, we'd like to show that D6 is up to the task *before* investing in another system.

Bibliography

- [1] Peter T Bobrowsky and Hans Rickman. “Comet/Asteroid Impacts and Human Society”. In: (), p. 549.
- [2] P Brown. “The flux of small near-Earth objects colliding with the Earth”. In: 420 (Nov. 21, 2002), pp. 294–296.
- [3] Peter Gural. “A review of video meteor detection and analysis software”. In: (Feb. 23, 2005), p. 6.
- [4] Ian Halliday, Arthur A. Griffin, and Alan T. Blackwell. “The Innisfree Meteorite Fall: A Photographic Analysis of Fragmentation, Dynamics and Luminosity”. In: *Meteoritics* 16.2 (June 1, 1981), pp. 153–170. DOI: 10.1111/j.1945-5100.1981.tb00540.x.
- [5] Stephen W Hughes et al. “The atmospheric extinction of light”. en. In: *European Journal of Physics* 37.1 (Jan. 2016), p. 015601. DOI: 10.1088/0143-0807/37/1/015601.
- [6] P. Jenniskens et al. “CAMS: Cameras for Allsky Meteor Surveillance to establish minor meteor showers”. In: *Icarus* 216.1 (Nov. 1, 2011), pp. 40–61. DOI: 10.1016/j.icarus.2011.08.012.
- [7] Jordi L. Pique. *PRESENTATION SPANISH PHOTOGRAPHIC METEOR NETWORK*.
- [8] Kyle McSwain. “Using An All-Sky Camera to Observe Fireballs and Characterize Near-Earth Meteoroids”. Physics Theses. Willamette University, May 11, 2016.
- [9] Peter Jenniskens. *Cameras for Allsky Meteor Surveillance (CAMS)*. Nov. 2018.
- [10] Joe Rao, Space.com Skywatching Columnist {\\textbar} March 9, and 2012 02:41pm ET. *Venus and Jupiter Align: 3 Odd Facts About 2-Planet Tango*. Space.com. URL: <https://www.space.com/14852-venus-jupiter-alignment-facts.html> (visited on 11/09/2018).
- [11] Luke Russell. “Photometry of Celestial Fireballs Using a Portable All-Sky Camera”. English. Physics Thesis. Willamette University, May 2018.

- [12] Duncan Steel. “Meteoroid orbits”. In: *Space Science Reviews* 78.3 (Nov. 1, 1996), pp. 507–553. DOI: 10.1007/BF00171928.
- [13] Josep M. Trigo-Rodríguez et al. “The 2006 Orionid outburst imaged by all-sky CCD cameras from Spain: meteoroid spatial fluxes and orbital elements”. In: *Monthly Notices of the Royal Astronomical Society* 380.1 (Sept. 1, 2007), pp. 126–132. DOI: 10.1111/j.1365-2966.2007.11966.x.
- [14] *WAT-902H2 ULTIMATE*.