

Cuaderno de Laboratorio - Tesis

JRR (10) and H. G. + LEC

27 de septiembre de 2019

17/9/2019

Corrida del barrido tomó 44.18 minutos.

$dx = dy = 100$ micrones ó 0.1 mm

21/9/2019

CITA del siguiente link:


<https://www.iridian.ca/technical-resources/articles-whitepapers/eyes-skies-optical-fi>

However, observation from orbit has presented its own set of challenges and associated solutions:


- CHALLENGE 1: see through the atmosphere (clouds/aerosols) or in some cases observe only these atmospheric constituents or phenomena
- SOLUTION 1: wavelength selective imaging
- CHALLENGE 2: observe small signals in a large background scene
- SOLUTION 2: large, highly uniform collection optics
- CHALLENGE 3: pack as much measurement capability into as small and lightweight a package as possible to reduce launch costs
- SOLUTION 3: compact/multi-spectral imaging
- CHALLENGE 4: determine the type of phenomena (“what”) and location (“where”) under observation from a distance (eg. low earth orbit is 160-2000 km above the earth’s surface)
- SOLUTION 4: combination of high spatial (“where”) and spectral (“what”) resolution
- CHALLENGE 5: survive launch conditions and operate outside of earth’s protective atmospheric blanket
- SOLUTION 5: robust and reliable optical components

FIN cita. Se observa que cada ítem de los de arriba podría ser un aspecto técnico del futuro DATASHEET.

Con respecto al challenge 2 cuya solución es *Large, Highly Uniform Collection Optics*, se encontró en la página del fabricante IRIDIAN, un gráfico similar al que se quiere reproducir con el barrido espacio-espectral del filtro:

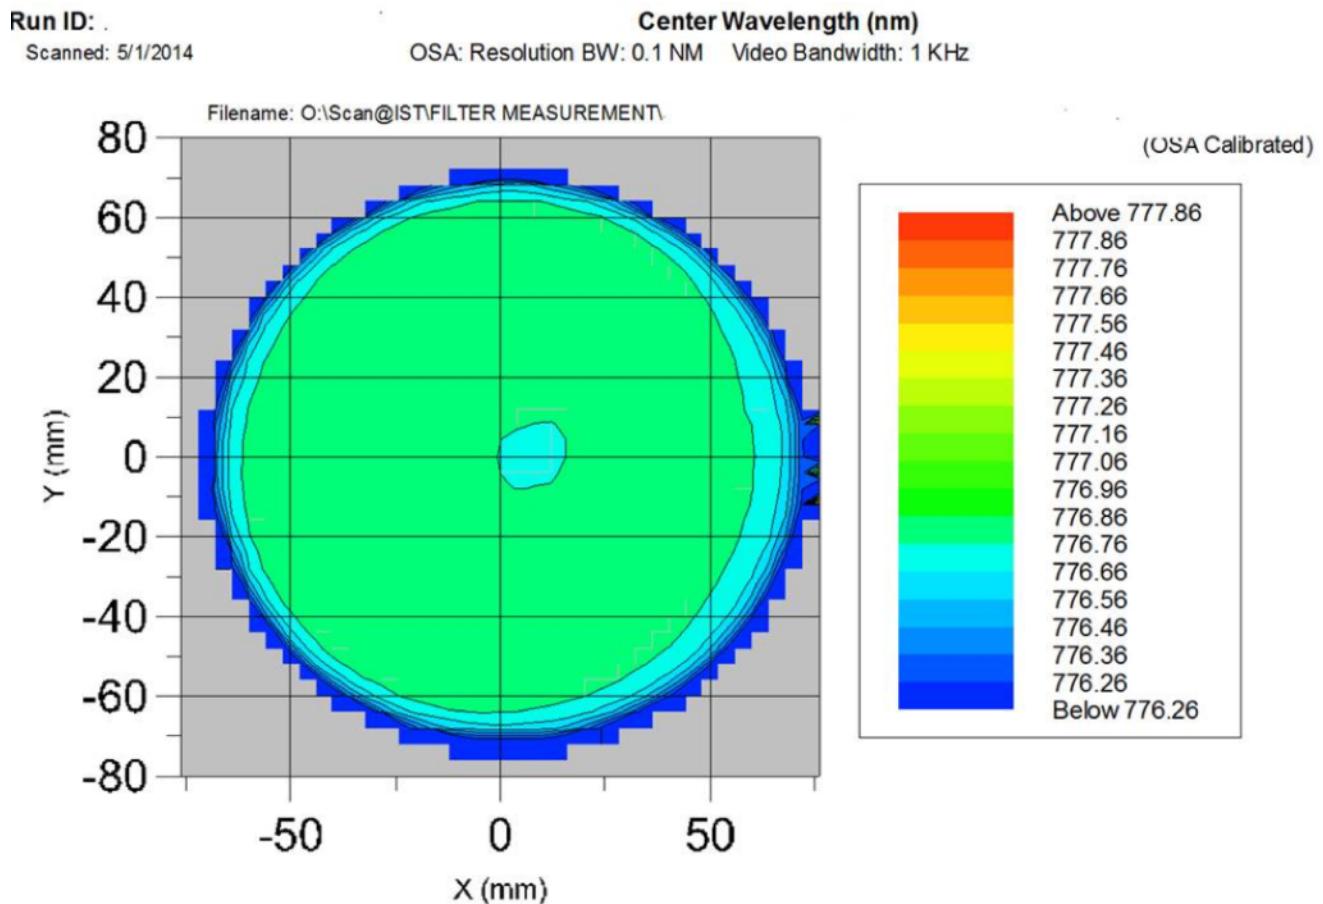

De las mediciones del 17/9, la banda verde tiene el siguiente espectro, parece ser bastante homogénea la banda, es decir que en cada punto x,y espacial de la banda el espectro de transmisión parece ser el mismo (esto habría que confirmarlo), se puede caracterizar con algún parámetro la homogeneidad del filtro? → El objetivo de esta parte es lograr una buena DATASHEET del filtro.

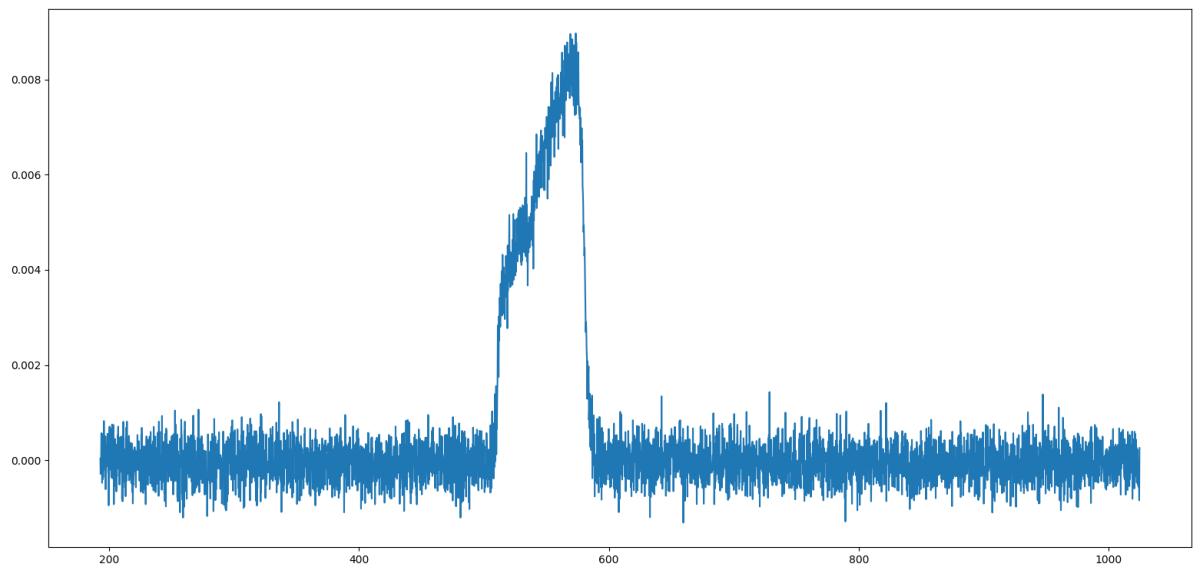

Ejemplo de datasheet del fabricante IRIDIAN, sacado de [aquí](#):

Optical Specifications					
Center Wavelength [nm]	9460				
FWHM [nm]	180				
Angle of Incidence [degrees]	0				
Transmittance [%]	65				
Blocking Range	<table border="1"> <thead> <tr> <th>Wavelength Range [nm]</th><th>Level [OD]</th></tr> </thead> <tbody> <tr> <td>2000-12000</td><td>2,<1%</td></tr> </tbody> </table>	Wavelength Range [nm]	Level [OD]	2000-12000	2,<1%
Wavelength Range [nm]	Level [OD]				
2000-12000	2,<1%				
Physical Specifications					
Filter thickness [mm]	1.0				
Outer Diameter [mm]	25.4+0/-0.2				

Mediciones espektrometro son de intensidad.. queremos transmisión.
Canal copado de repaso de cosas de óptica: [kridnix](#)

23/9/2019

Ya me imprimieron la pieza, gracias Hilario! (por buscarmela antes de que se vayan los del taller).

25/9/2019

mediciones de hoy..

$\Delta x = \Delta y = 13\text{mm}$, pasos de $500\text{ }\mu\text{m}$ en la 1era medición y de $10\text{ }\mu\text{m}$ en la 2da medición.

Fuente de luz utilizada: Fiber-Lite 190 Illuminator, 30 watt Halogen light source

w/ EKZ lamp, link: <https://dolan-jenner.com/products/fiber-lite-190>

datasheet: <https://www.setra.com/hubfs/products/illuminators/model-190-data-sheet.pdf>

27/9/2019

apróx 18hs tarda un barrido de $13\text{mm} \times 13\text{ mm}$ con un paso de 50 micrones tanto en dx como en dy.

Algunas fotos del setup del barrido:

