

- For wooden fronts and wood or aluminum framed fronts
- Max. flap / door weight 17.9 kg
- Adjustable opening and closing force
- Combination with Intermat 9936 fast-assembly hinge (opening angle 95°) recommended
- Silent system integrated — soft closing action
- The fitting must be adapted to different front weights by means of gas pressure springs which must be ordered separately
- Identical cabinet drilling pattern for Lift Advanced HF/HK/HL/HS
- Including fixing accessories
- Three dimensional front adjustment: (with recommended Intermat fast-assembly hinge 9936):  
height + 1 / - 2.5 mm, side ± 2 mm; depth ± 2 mm
- Inside cabinet dimensions:  
Height 276 - 720 mm  
Depth min. 182 mm  
Width min. 300 mm
- Housing and hinge mechanism of gray plastic / aluminum silver

Set contains:




Internal cabinet height	Price
276 - 720 mm	P6,200.00

Folding-flap Life

Internal cabinet height	Order no.
276 - 720 mm	9 079 603

Pneumatic action (see chart below)

For folding-flap fitting Lift Advanced HF (Order no. 9 079 614)  
Inside cabinet height 540 - 600 mm

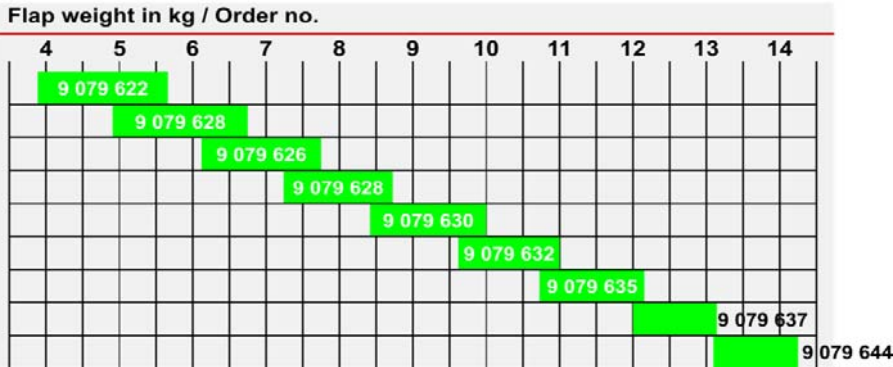

Adapter for aluminum frame profile:



Order no.	Price
9 079 709	P330.00

For folding-flap fitting Lift Advanced HF (Order no. 9 079 614)  
Inside cabinet height 600 - 720 mm

