


NOTES: (UNLESS OTHERWISE SPECIFIED)

- SPECIFICATIONS AND DOCUMENTS:
 - FN 4 & 13 THRU 19 CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1, LEGEND PLATE.
 - FN 3 CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1, LIGHT PLATE.
 - ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
- ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS. ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING MANUFACTURING FILES:
 - FLAT PARTS: <MATERIAL> <MATERIAL COLOR, IF APPLICABLE> <THICKNESS, IN DECIMAL INCHES> <PN> <DESCRIPTION> <REV>_V<VERSION NUMBER OF MODEL>.SVG
 - FDM 3D PRINTED PARTS: FDM_<PN>_<DESCRIPTION>_<REV>_V<VERSION # OF MODEL>.3MF
 - RESIN 3D PRINTED PARTS: RESN_<PN>_<DESCRIPTION>_<REV>_V<VERSION # OF MODEL>.3MF
- FN 29, 30 & 31 ARE INCLUDED WITH THEIR RESPECTIVE SWITCHES, AND SHOULD NOT BE ORDERED SEPARATELY.
- FINISH FN 9 & 11 IAW FED-STD-595, FS36231, DULL GULL GREY. AT TIME OF INSTALLATION, FILE OR OTHERWISE REMOVE MATERIAL BETWEEN THE LOWER TABS OF BUTTONS TO CLEARANCE PCB COMPONENTS AS REQUIRED.
- ALL SURFACES VISIBLE TO THE USER WHEN ASSEMBLED AND DO NOT OTHERWISE HAVE A FINISH SPECIFIED IN NOTES 1 OR 4 SHALL BE FINISHED IAW FED-STD-595, FS37038, BLACK.

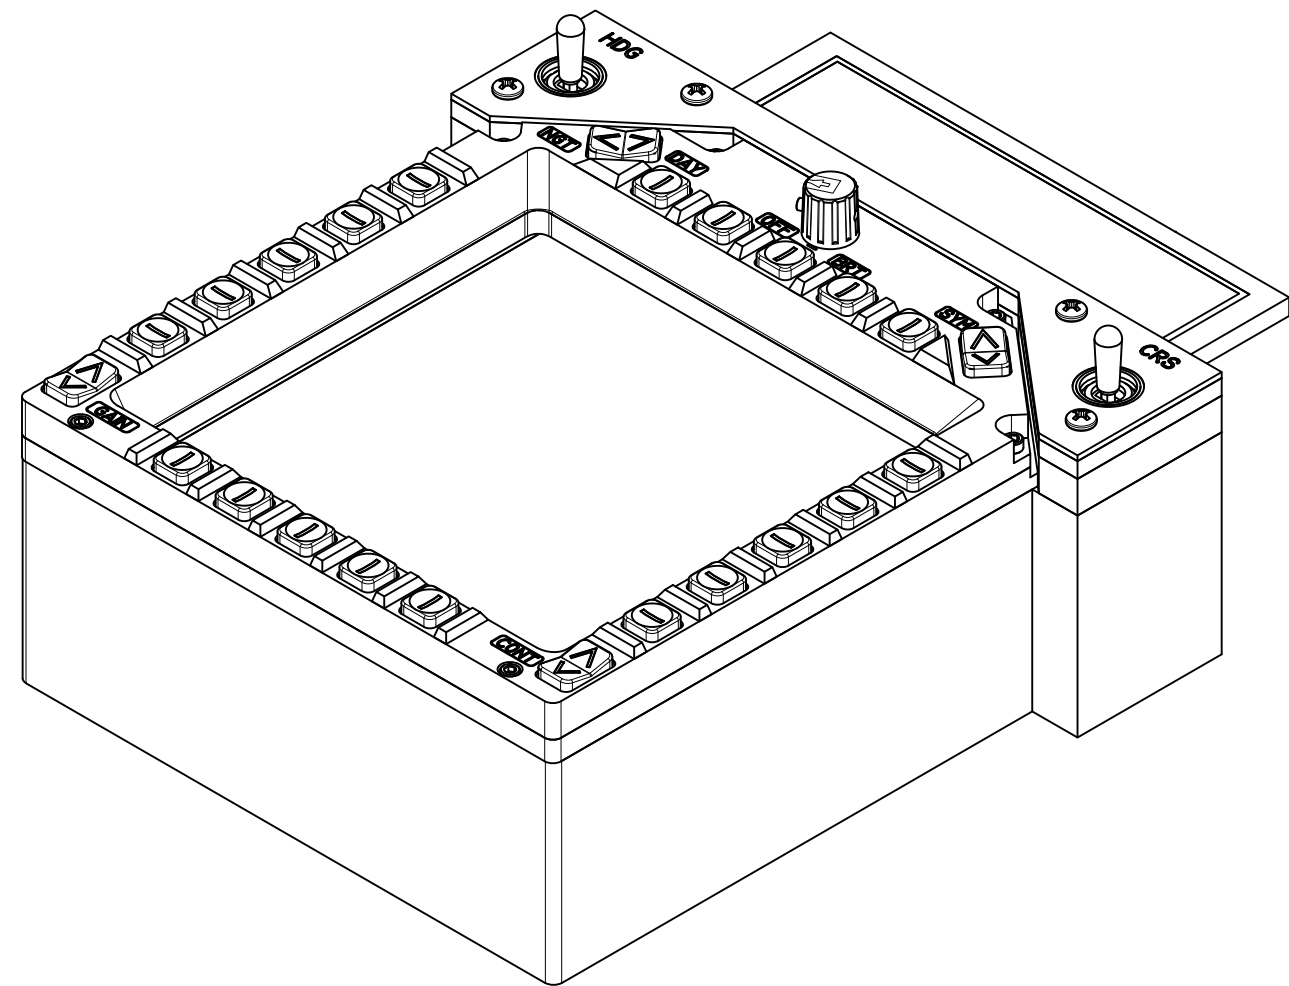

-1 ASSY

INCLUDED NUT
NOT SHOWN.
INSTALL NUT TO
SECURE TO FN 5.

DISPLAY ORIENTATION CRITICAL.
ORIENT DISPLAY AS SHOWN BASED
ON LOCATION OF DATA CABLE.

-1 ASSY

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	4/14/2023	
A	ADDED MISSING BALLOON 7	7/26/2024	J. STEENSEN
B	CHANGE MATERIAL CODE AND DESCRIPTION FOR FN24	06/08/2026	

41	1	OHC0003-412FGB2	ASSY, KNOB, GREY, .125 RECESSED D-SHAFT	----
40	1	OHC0015-1	ASSY, DDI_AMPDC_CONTROLLER	N/A
39	5	93365A140	INSERT, 8-32, BRASS, FOR PLASTICS	BRS
38	2	91251A107	SHCS, #4-40 X .3125, STEEL, BLK	STL
37	4	91251A115	SHCS, #4-40 X 1.00, STEEL, BLK	STL
36	6	93365A120	INSERT, 4-40, BRASS, FOR PLASTICS	BRS
35	2	91249A148	PHS, #6-32 X .50, 18-8, BLK	SS
34	2	91249A156	PHS, #6-32 X .8750, 18-8, BLK	SS
33	2	90471A220	FHS, 100DEG, #6-32 X .500, STEEL	STL
32	6	93365A130	INSERT, 6-32, BRASS, FOR PLASTIC	BRS
31	2	HDW17	LOCKING RING FOR SWITCH, B13	N/A
30	2	HDW12	LOCK WASHER FOR SWITCH, B13	N/A
29	4	HDW4	HEX NUT FOR SWITCH, 15/32-32NS	N/A
28	2	100SP4T8B13M1QEH	SWITCH, TOGGLE, (ON)-OFF-(ON), SPDT, 18MM BAT	N/A
27	1	39SB-1RB-103	POT, 10K LINEAR, .125 SHAFT, DETENT SWITCH	N/A
26	1	OH2A3A1-30	AMPDC FINGER GUARD D	PETG
25	1	3846N371	1.0 X 36.0, STRIP, NPRN, ADHESIVE BACK, 40A DURO	RBR
24	1	OH2A3A1-29	PCB,AMPDC_BUTTON_BOARD	N/A
23	1	7598A71	TAPE, LIGHT DUTY, DOUBLE SIDED, FOAM	N/A
22	1	ER-TFTV101A1-1	PCB, HDMI CONTROLLER FOR LCD PANEL	N/A
21	1	7598A71	TAPE, LIGHT DUTY, DOUBLE SIDED, FOAM (1)	N/A
20	1	ER-TFTV101A1-1_DISPL AY	----	N/A
19	1	OH2A3A1-28	AMPDC LEGEND PLATE, CONT	RMRK
18	1	OH2A3A1-27	AMPDC LEGEND PLATE, BRT	RMRK
17	1	OH2A3A1-26	AMPDC LEGEND PLATE, SYM	RMRK
16	1	OH2A3A1-25	AMPDC LEGEND PLATE, GAIN	RMRK
15	1	OH2A3A1-24	AMPDC LEGEND PLATE, OFF	RMRK
14	1	OH2A3A1-23	AMPDC LEGEND PLATE, NGT	RMRK
13	1	OH2A3A1-22	AMPDC LEGEND PLATE, DAY	RMRK
12	8	OH2A3A1-21	AMPDC ROCKER INSERT	RESN
11	4	OH2A3A1-20	AMPDC ROCKER	RESN
10	20	OH2A3A1-19	AMPDC BUTTON INSERT	RESN
9	20	OH2A3A1-18	AMPDC BUTTON	RESN
8	1	OH2A3A1-17	AMPDC FINGER GUARD C	PETG
7	4	OH2A3A1-16	AMPDC FINGER GUARD B	PETG
6	18	OH2A3A1-15	AMPDC FINGER GUARD A	PETG
5	1	OH2A3A1-14	AMPDC BEZEL	PETG
4	1	OH2A3A1-13	HDG-CRS SET SPACER LEGEND PLATE	RMRK
3	1	OH2A3A1-12	HDG-CRS SET SPACER LIGHTPLATE	ACRL
2	1	OH2A3A1-11	HDG-CRS SET SPACER	PETG
1	1	OH2A3A1-10	AMPDC - CRS-HDG BASE SUPPORT	PETG

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
------	-----	-------------	-------------	----------

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES.

DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS.

INTERPRET DRAWING IAW ASME Y14.100-2017.

INTERPRET DIM AND TOL IAW ASME Y14.5-2009.

REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX.

DIMENSIONS APPLY BEFORE FINISH.

UOS INCH TOLERANCES ARE:

DECIMALS: .X ± .1
.XX ± .03
.XXX ± .010

ANGLES: MACHINED ± 5°
LOCATING ± 5°
FORMED ± 2°
CHAMFERS ± 5°

DRILLED HOLE DIAMETERS:
.0135 - .125: +.004/- .001
.126 - .250: +.005/- .001
.251 - .500: +.006/- .001
.501 - .750: +.008/- .001
.751 - 1.000: +.010/- .001
1.001 - 2.000: +.012/- .001

OPEN HORNET
<https://www.OpenHornet.com>

TITLE
ASSY, AMPCD MODULE

LOWER INSTRUMENT PANEL

DESIGNED	J. STEENSEN	04/14/2023
CHECKED		
DRAWN	J. STEENSEN	04/14/2023

SIZE	DWG NO	REV
D	OH2A3A1-1	B
SCALE 1:2	DO NOT SCALE DWG	SHEET 1/1