
NOTES: (UNLESS OTHERWISE SPECIFIED)

1) This is a 2-Layer PCB
2) Each layer requires a 2oz Copper pour
3) The 12V_Supply and Vin(+12V) symbols under PWR FLAGS depict 2 different nets, but are ultimately tied together.

ARDUINO MEGA REV3


Note: 1) Connections are standard 2.54mm pitch Pin Headers. Pin Sockets can be used in lieu of Pin Headers; dependent on what is attached to the Arduino Mega.

2) 5x – 1x08 Pin Headers
1x – 1x10 Pin Header
1x – 2x18 Pin Header

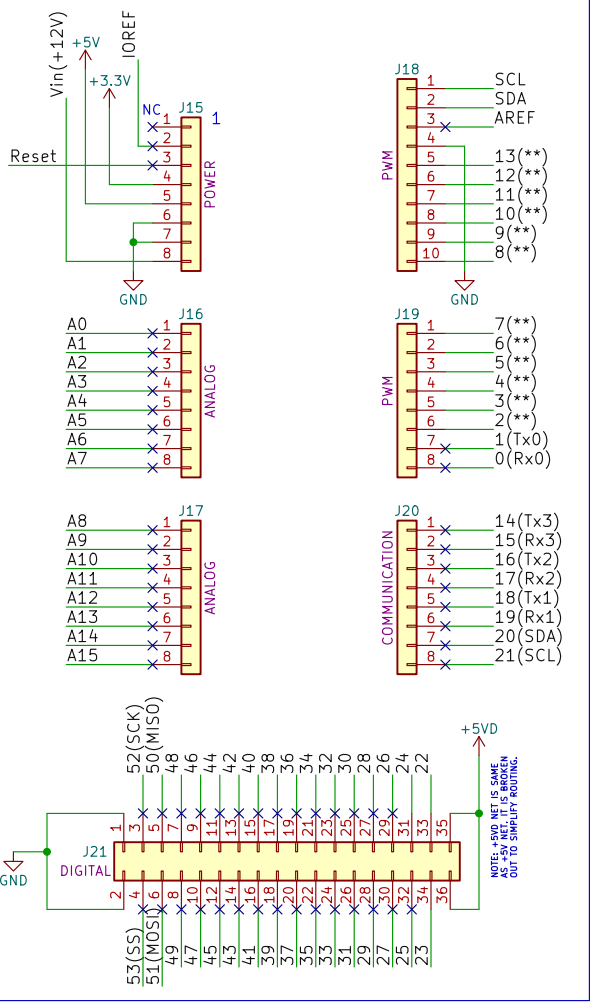

BACKLIGHTING CHANNELS

Note: All connectors associated with backlighting channels (BL#1 thru BL#10) are Molex Mini-Fit Jr. 2x02 (Part Number: 39-28-1043)

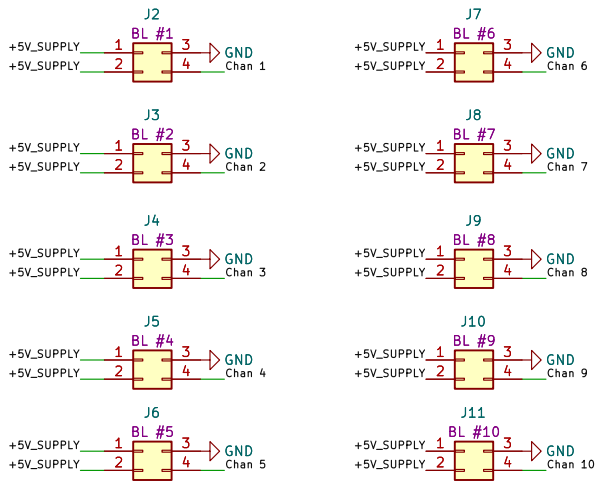


LED VOLTAGE SELECT


The operating voltage of the LED must match the selection here. Solder a bridge on either JP3 or JP4 to choose your operating voltage.

WARNING: DO NOT SOLDER BOTH PADS OR DAMAGE WILL OCCUR


JP3 = 5v
JP4 = 3.3v




LEDS




ROTARY ENCODER




FAN VOLTAGE SELECTOR




ABSIS BACKLIGHT POWER



COOLING FANS

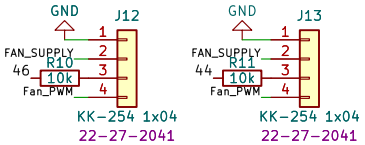

TEMP SENSOR

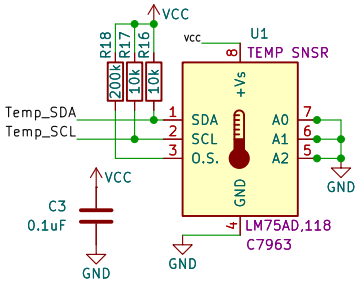


MOUNTING HOLES




LOGOS




PWR FLAGS




U2
SN74LV8T245PWR

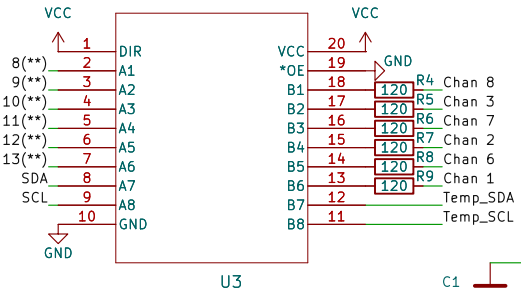

U3
SN74LV8T245PWR

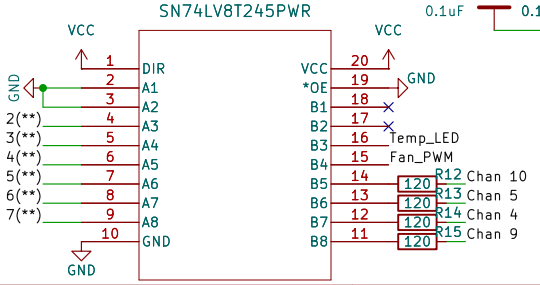



1: There are only 2 layers.
2: Each layer requires a 2oz copper pour.

OPEN HORNET
www.openhornet.com

Sheet: ABSIS_Backlight Controller
File: ABSIS_Backlight Controller.kicad_sch

Title: ABSIS Backlight Controller

Size: USLetter	Date: 2026-10-02	**Rev: 2.0.0**
License: CC BY-NC-SA		Id: 1/1