


NOTES: (UNLESS OTHERWISE SPECIFIED)


1. SPECIFICATIONS AND DOCUMENTS:
- 1.1. PANEL CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1.
- 1.2. INDICATOR CONSTRUCTION SHALL BE IAW OH-SPEC-001, INDICATOR TYPE A, METHOD 1.
- 1.3. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS. ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING INTERMEDIATE FILES:
- 2.1. FLAT PARTS: <MATERIAL> <MATERIAL COLOR, IF APPLICABLE>_<THICKNESS, IN DECIMAL INCHES> <PN> <REV>.v<VERSION NUMBER OF MODEL>.DXF
- 2.2. FDM 3D PRINTED PARTS: FDM_<PN> <REV>.v<VERSION # OF MODEL>.STL
- 2.3. RESIN 3D PRINTED PARTS: RESIN_<PN> <REV>.v<VERSION # OF MODEL>.STL
3. FN 17, 18, 19 & 25 ARE INCLUDED WITH THEIR RESPECTIVE SWITCHES, AND SHOULD NOT BE ORDERED SEPARATELY.


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	4/1/2023	
A	UPDATE FN5 MATERIAL DESCRIPTION TO N/A UPDATE -14 TO REMOVE INTERFERENCE WITH ALE+ CHANGED ALE TO ALE+	09/20/2026	

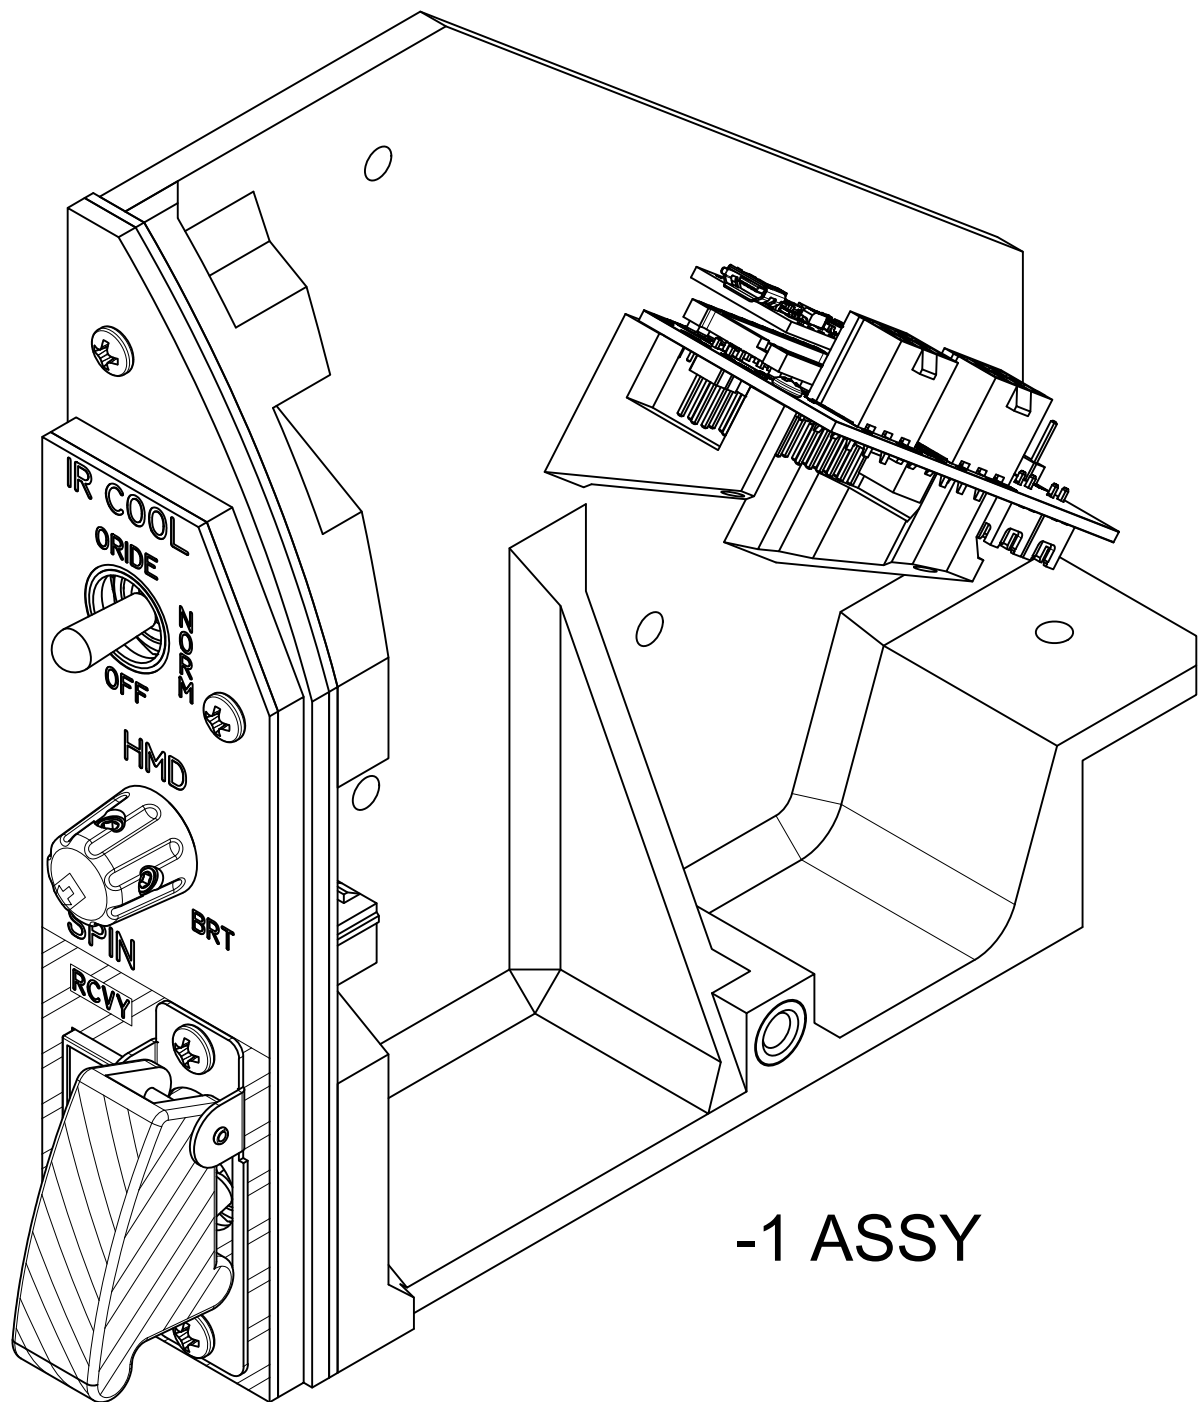


25	1	N/A	TOP NUT (PO 50A36-01-1-05N)	STL
24	1	OH1A6-15	INSULATING WASHER	PETG
23	1	ABSIS001	ASSY, ABSIS ALE+	N/A
22	1	P170S-FC20BR10K	POT, 10K, PANEL MOUNT, SIDE ADJUST, LUGS, ON-OFF SWITCH	N/A
21	1	OHC0003-A-18FLGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
20	1	100SP3T8B13M1QEHE	SWITCH, TOGGLE, ON-OFF-ON, SPDT, 18MM BAT	N/A
19	4	HDW4	HEX NUT FOR SWITCH, 15/32-32NS	N/A
18	2	HDW12	LOCK WASHER FOR SWITCH, B13	N/A
17	2	HDW17	LOCKING RING FOR SWITCH, B13	N/A
16	1	100SP1T8B13M1QEHE	SWITCH, TOGGLE, ON-ON, SPDT, 18MM BAT	N/A
15	2	90760A007	NUT, JAM, #6-32, STEEL	STL
14	1	93365A160	INSERT, .25-20, BRASS, FOR PLASTICS	BRS
13	2	91772A162	PHS, 6-32 X .5625, 18-8	SS
12	3	93365A130	INSERT, 6-32, BRASS, FOR PLASTIC	BRS
11	1	91249A148	PHS, 6-32 X .500, 18-8, BLACK-OXIDE	SS
10	2	91249A156	PHS, 6-32 X .8750, 18-8, BLACK-OXIDE	SS
9	2	93365A110	BRASS HEAT-SET INSERT FOR PLASTICS 2-56	BRS
8	2	94070A076	PHS, 2-56 X .1875, BRASS	BRS
7	1	MS25224-2	GUARD, TOGGLE SWITCH, 3-HOLE	N/A
6	1	OH1A6-14	SPIN PANEL MODULE BRACKET	PETG
5	1	OH1A6-13	PCB, SPIN RCV PANEL V1	N/A
4	1	OH1A6-100	SPN INDICATOR	----
3	1	OH1A6-12	SPIN PANEL LEGEND PLATE	RMRK
2	1	OH1A6-11	SPIN PANEL LIGHTPLATE	ACRL
1	1	OH1A6-10	SPIN PANEL BACKPLATE	ACRL

UNLESS OTHERWISE SPECIFIED:		UOS INCH TOLERANCES ARE:		 OPEN HORNET https://www.OpenHornet.com	
DIMENSIONS ARE IN INCHES. DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS. INTERPRET DRAWING IAW ASME Y14.100-2017. INTERPRET DIM AND TOL IAW ASME Y14.5-2009. REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX. DIMENSIONS APPLY BEFORE FINISH.		DECIMALS: .X ± .1 .XX ± .03 .XXX ± .010	ANGLES: MACHINED ± 5° LOCATING ± 5° FORMED ± 2° CHAMFERS ± 5°		
DESIGNED J. STEENSEN 04/01/2023		DRILLED HOLE DIAMETERS: .0135 - .125: +.004/- .001 .126 - .250: +.005/- .001 .251 - .500: +.006/- .001 .501 - .750: +.008/- .001 .751 - 1.000: +.010/- .001 1.001 - 2.000: +.012/- .001		TITLE ASSY, PANEL, SPIN RECOVERY UPPER INSTRUMENT PANEL	
CHECKED				SIZE D	REV A
DRAWN J. STEENSEN 04/01/2023		SCALE 1:1		DO NOT SCALE DWG	SHEET 1/3

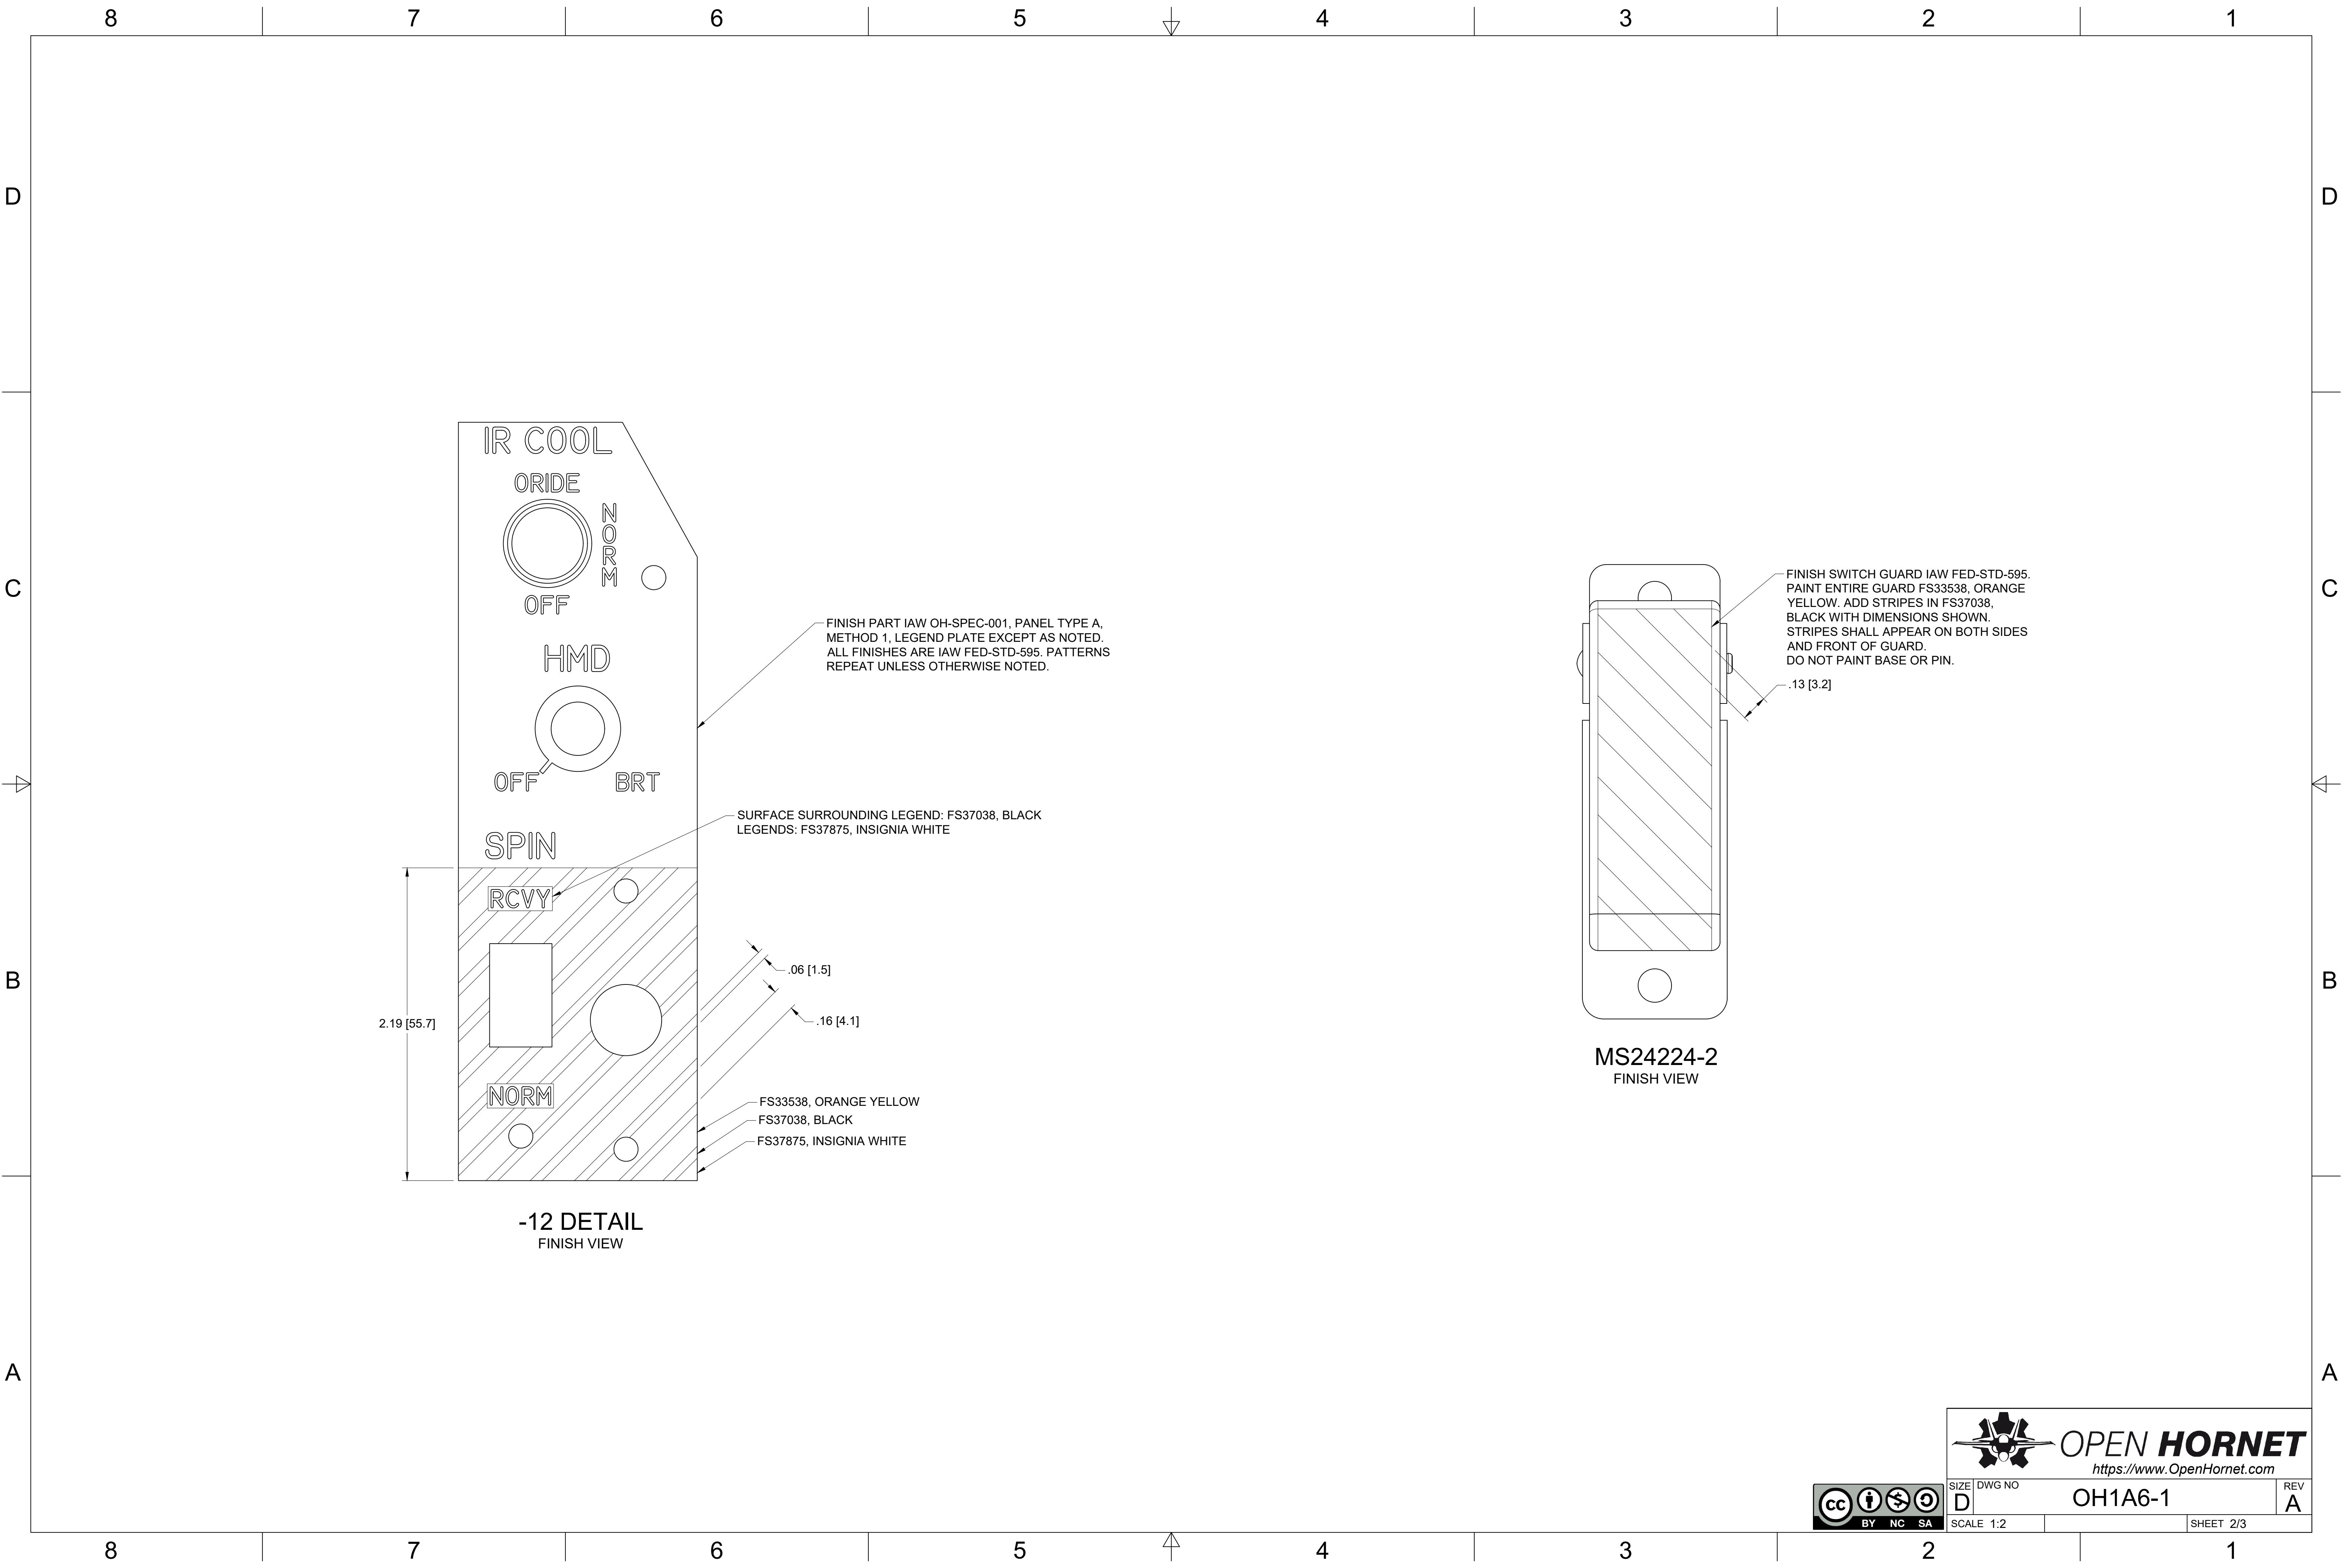

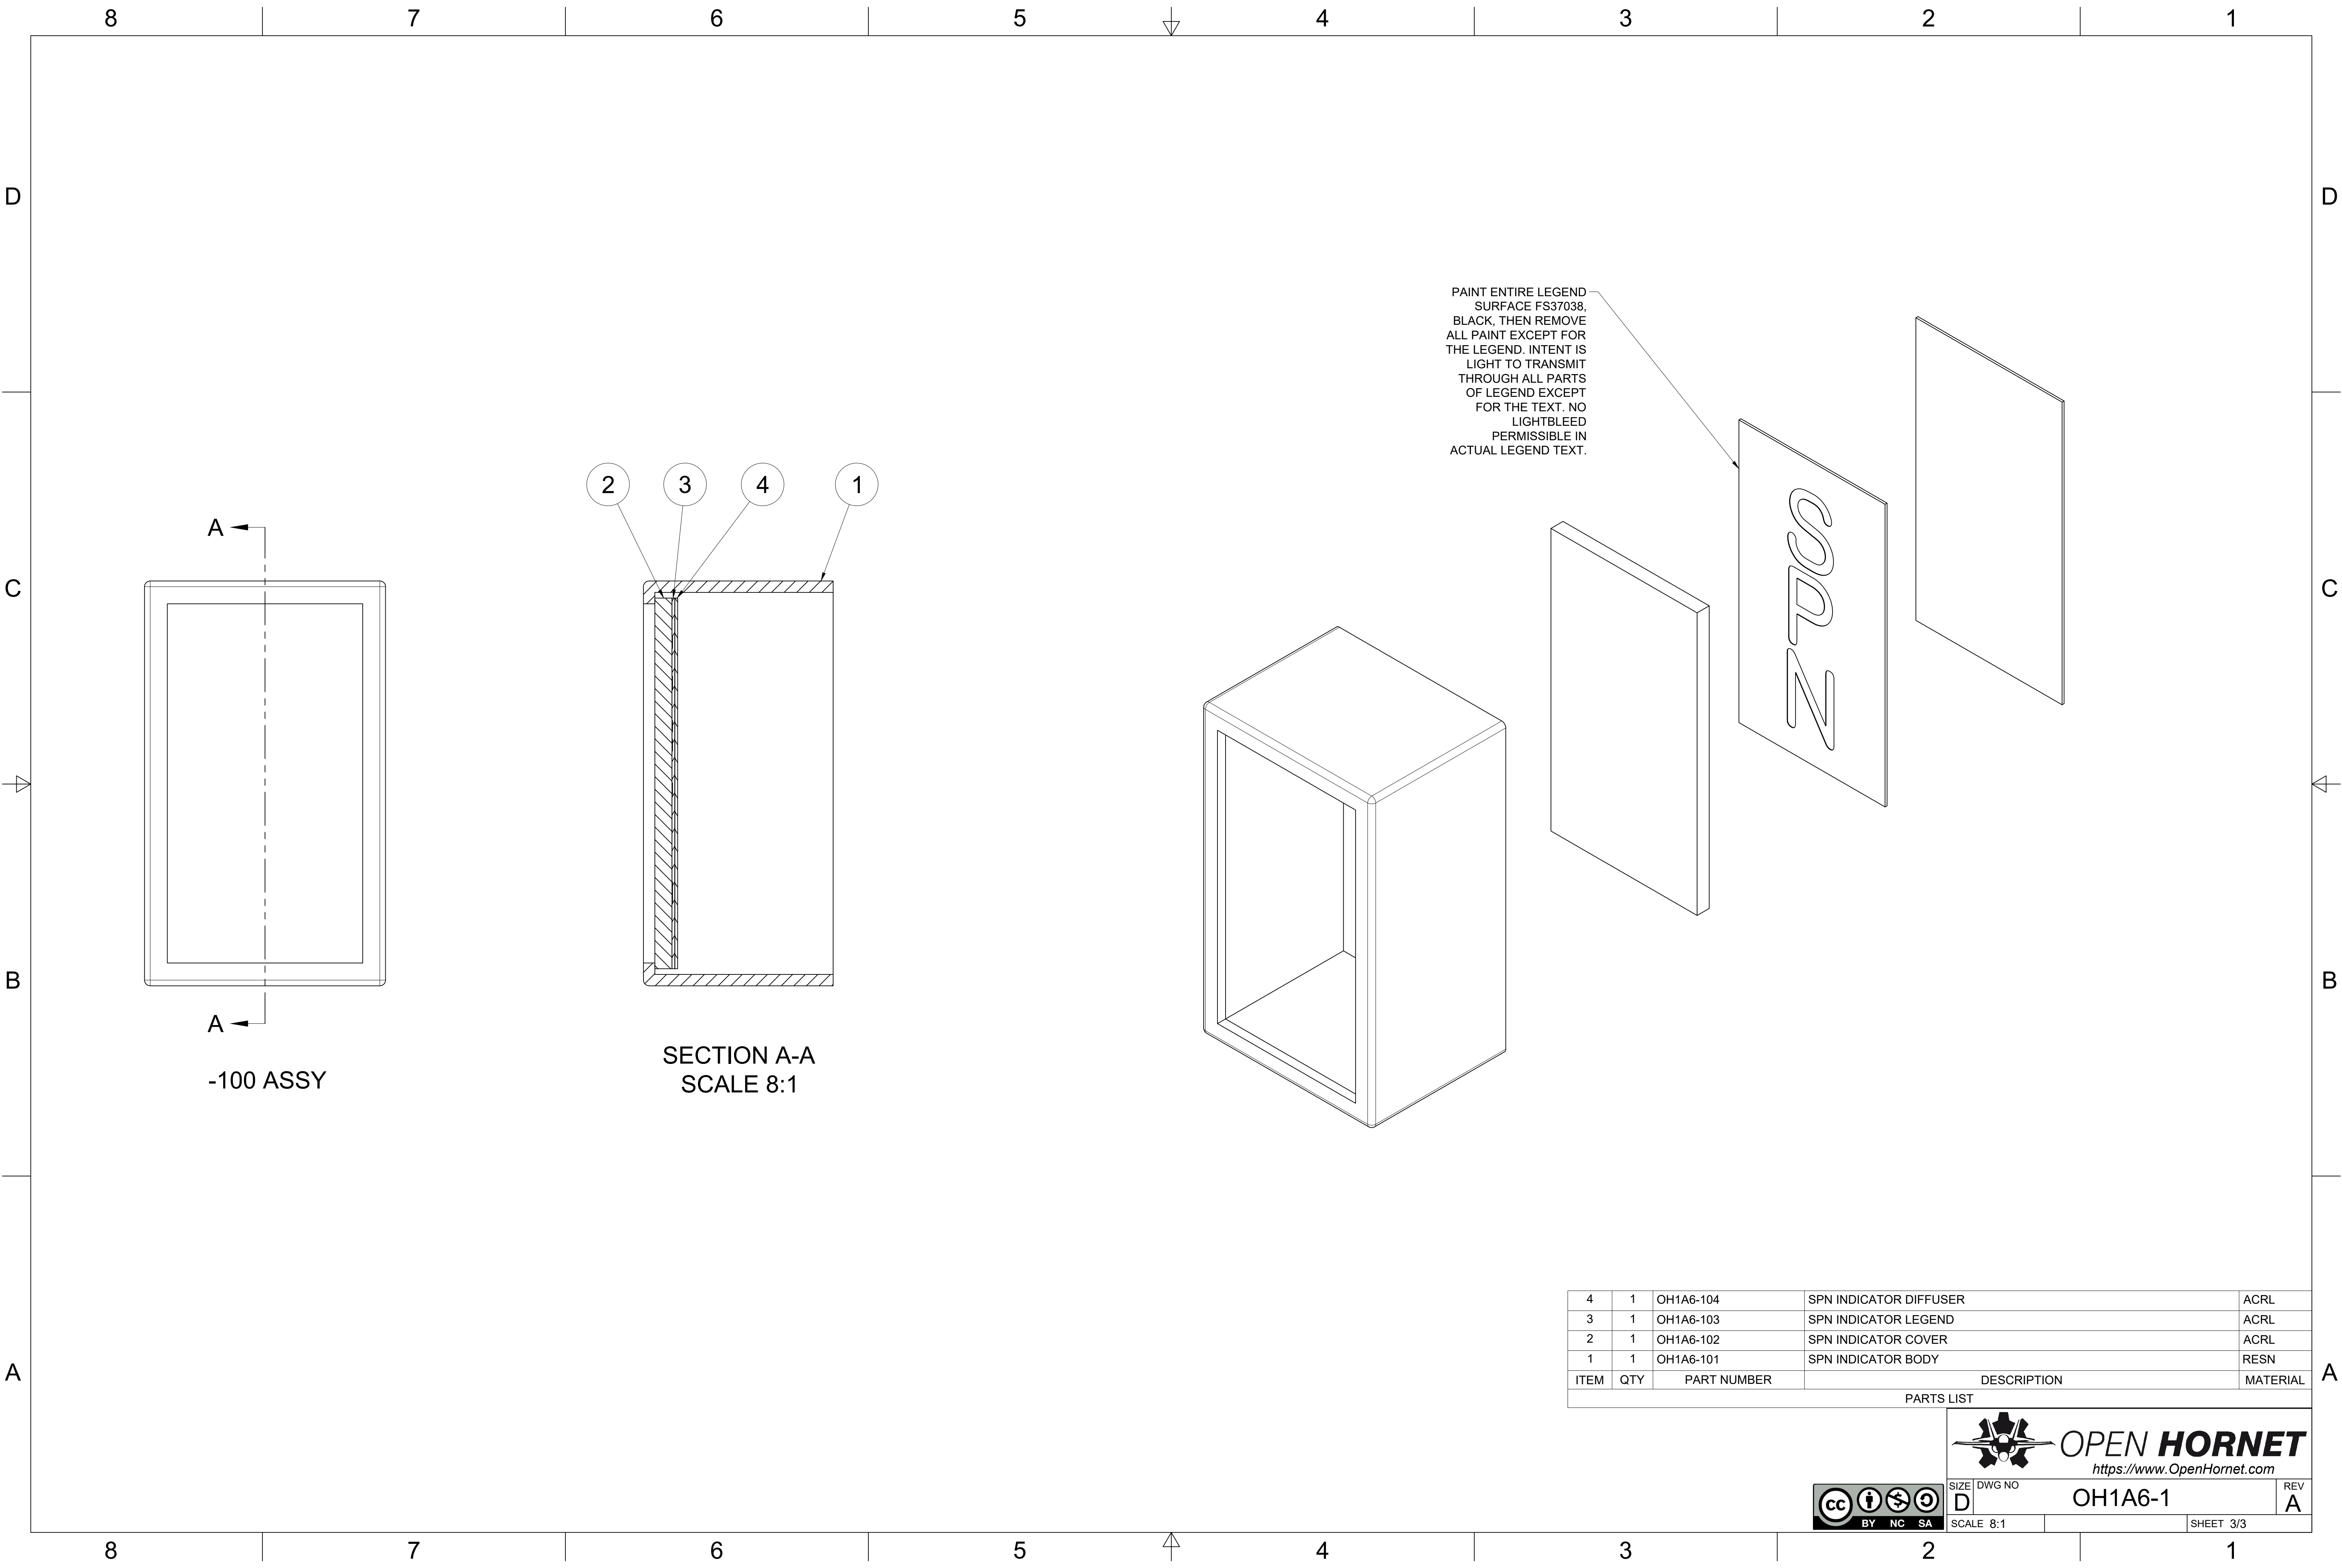

4	1	OH1A6-104	SPN INDICATOR DIFFUSER	ACRL
3	1	OH1A6-103	SPN INDICATOR LEGEND	ACRL
2	1	OH1A6-102	SPN INDICATOR COVER	ACRL
1	1	OH1A6-101	SPN INDICATOR BODY	RESN
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL



OPEN HORNET
<https://www.OpenHornet.com>

SIZE	DWG NO	REV
D	OH1A6-1	A
SCALE 8:1		SHEET 3/3