

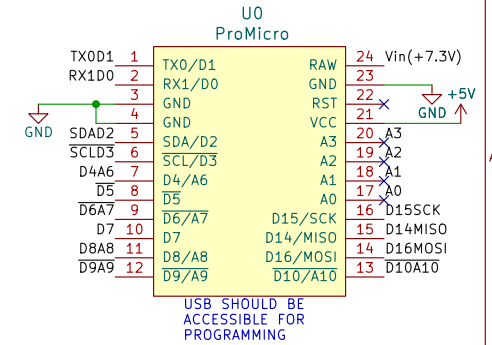


NOTES: (UNLESS OTHERWISE SPECIFIED)



- 1) BL DATA SELECT: PLACE JUMPER OVER PINS 1 & 2 OF JP1/JP2 TO SELECT DATA INPUT FROM BACKLIGHTING BUS. PLACE JUMPER OVER PINS 2 & 3 OF JP2/JP3 TO SELECT DATA FROM THE RADAR ALTIMETER CONTROLLER MCU.
- 2) J17 IS USED FOR BOTH AN ENCODER AND LINEAR POTENTIOMETER. DO USE BOTH SIMULTANEOUSLY. USE PINS 1 - 3 FOR THE POT. USE PINS 2 - 4 FOR THE ENCODER.
- 3) SURFACE MOUNT COMPONENTS ARE ALL ON THE BACK SIDE OF THE BOARD.
- 4) THERE ARE THROUGH HOLE COMPONENTS ON BOTH SIDES. PLEASE REFER TO MODEL AND SILKSCREEN FOR PROPER PLACEMENT.
- 5) THIS IS A 6-LAYER PCB.

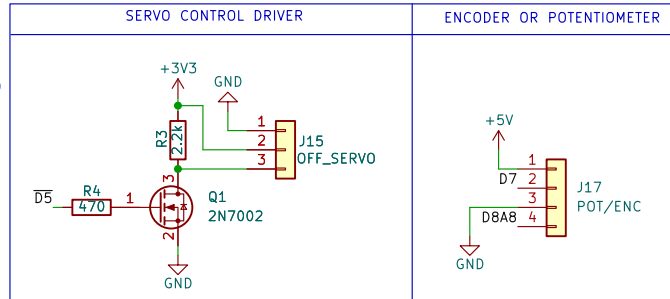


ABSIS BUS CONNECTORS



RS485 BUS CONTROLLER

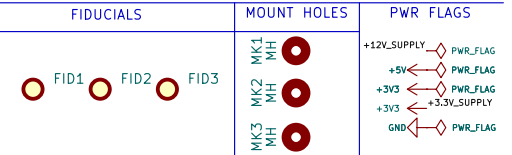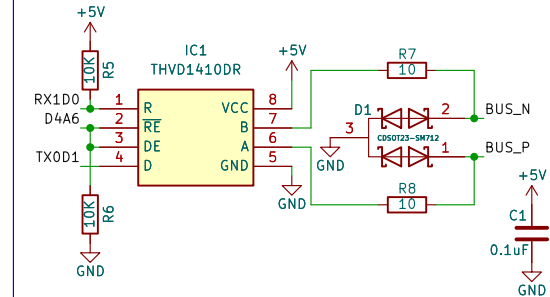

12V POWER CONDITIONING (12V -> 7.3V)

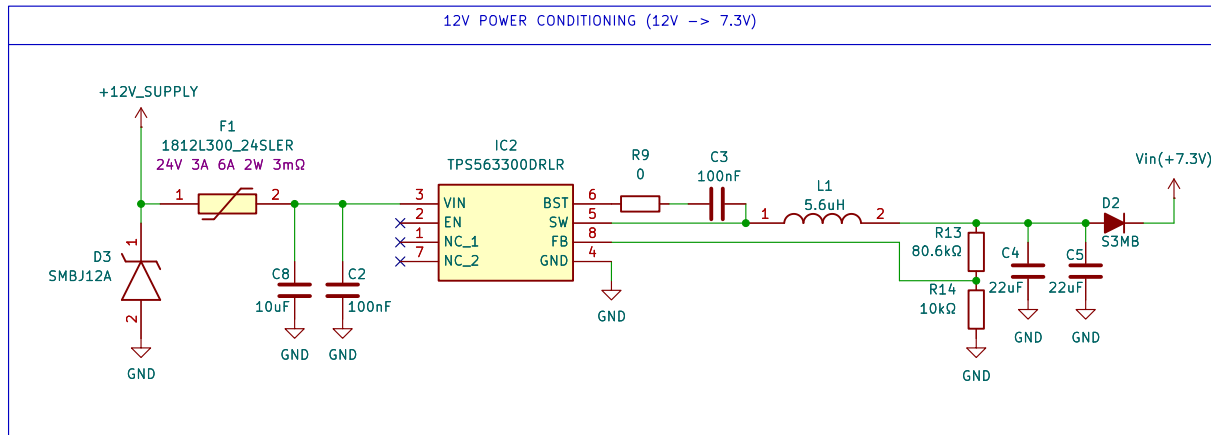

OPEN HORNET
www.openhornet.com

Sheet: CONTROLLER_Radar Altimeter
File: CONTROLLER_Radar Altimeter.kicad_sch

Title: Radar Altimeter Controller

Size: A Date: 2026-10-03

License: CC BY-NC-SA

Rev: 4

Id: 1/1