


EXTERIOR ELEVATION

NOT TO SCALE

~ SOLAR INNOVATIONS' SPLIT WALL SYSTEM ~

"INTERIOR"



PLAN VIEW

NOT TO SCALE

UNIT INFORMATION

FRAMING TYPE: G3 Standard Framing with Iso-bar thermal break

GLAZING SET UP: Opening for 3/16 Monolithic Glazing to 1 4/1 Insulated Glazing, Polycarbonate, or Solid Panel Infill

Zero Maintenance Extruded Aluminum Hinges with Stainless Steel Pin

Minimum Horizontal Panel Dimension 18". Smaller Panels may be available upon Engineering Approval

Designed and Manufactured in the U.S.A.

© 2017 Solar Innovations, Inc. - All Rights Reserved. These plans are the property of Solar Innovations, Inc. Any use or reproduction of these plans, in whole or in part, without the written permission of Solar Innovations, Inc. is forbidden.



SI33300 G3 Thermally Broken Folding Glass Wall, Outfold, Top Load, Recessed Flush Hat Sill


ALL DRAWINGS

DRAWING

NOT TO SCALE

SCALE:


ARE VIEWED FROM THE **EXTERIOR** LOOKING IN.

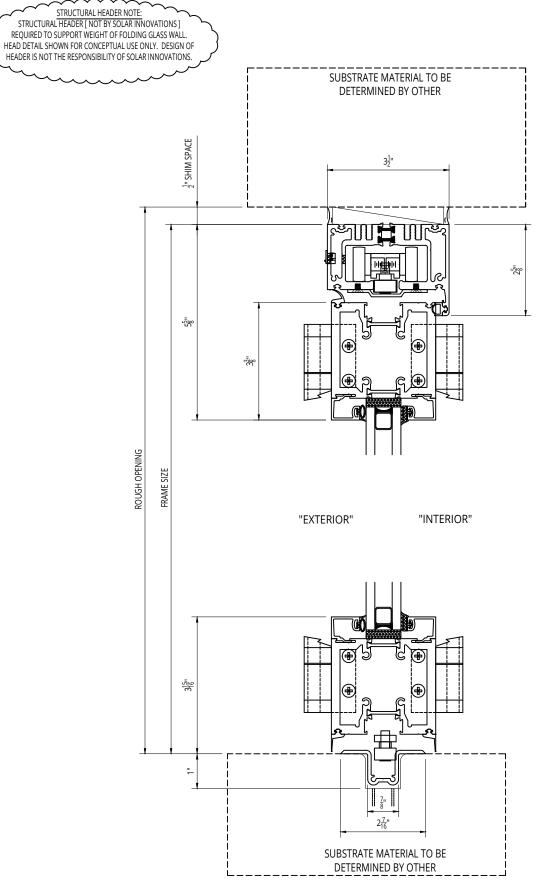



SI33300 G3 Thermally Broken Folding Glass Wall, Outfold, Top Load, Recessed Flush Hat Sill - Head and Sill Section

ALL DRAWINGS ARE VIEWED FROM THE EXTERIOR LOOKING IN.

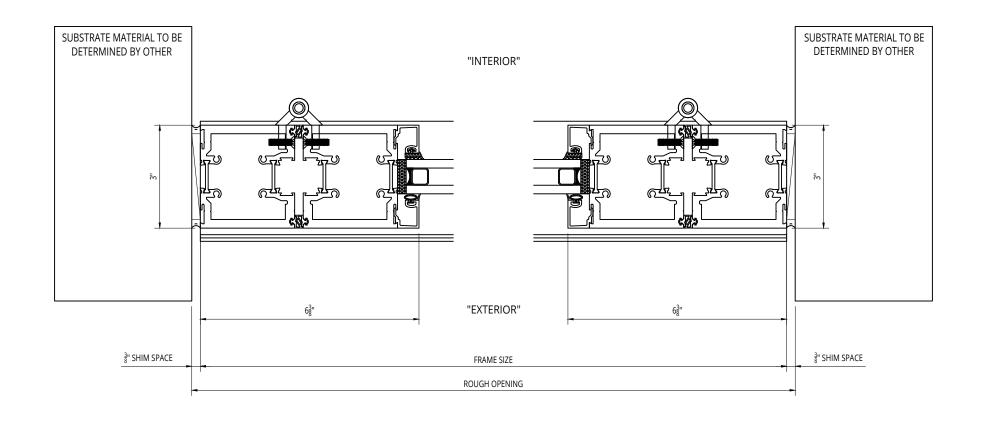

© 2017 Solar Innovations, Inc. - All Rights Reserved. These plans are the property of Solar Innovations, Inc. Any use or reproduction of these plans, in whole or in part, without the written permission of Solar Innovations, Inc. is forbidden.



SI33300 G3 Thermally Broken Folding Glass Wall, Outfold, Top Load, Recessed Flush Hat Sill

DRAWING

NOT TO SCALE

SCALE: