

# **D**istribuidora **de** **O**ccidente



**Cortinas  
Hawaianas**



**Cortinas de Aire**



**Termómetros Taylor**



**Bomba De Vacío**

Somos una Empresa dedicada a la compra e importación de refacciones industriales en USA. Distinguiéndonos por la calidad y suministro de nuestros productos ofreciendo el mejor precio al menor tiempo de entrega, logrando así satisfacer las necesidades de nuestros clientes.



**Cinta de aluminio**




**Fluke**



**Termostatos**



**Graficadores  
De  
Temperatura**



**Rollos De  
Vinil**

Tel: (667) 716-45-22

Correo Electrónico: Sergio\_valenzuela@prodigy.net.mx

Fax: (667) 712-02-72

Culiacán, Sinaloa, México

## CORTINAS HAWAIANAS




### CONSERVACION

8.08" X 91 MTS.  
12.120" X 61 MTS.




### CONGELACION

8.08" X 91 MTS.  
12.120" X 61 MTS.



### NAYLON REFORZADO

8.08" X 91 MTS.  
12.120" X 61 MTS.



### RIBBED

8" X 0.72" X 45 MTS.

\* Estos plásticos están elaborados con los materiales certificados por la **USDA**

## TERMOMETROS TAYLOR DIGITALES



### #1451

#### Digital Temp Indoor with Humidity

1 3/4" dual LCD shows indoor temperature and indoor humidity. Min/max memory recalls high and low readings. Displays temperature in °F or °C degrees. 2 AA batteries required (not included).



### #1452

#### Digital Temp Indoor/Outdoor with Humidity

1 3/4" dual LCD shows indoor and outdoor temperatures or indoor humidity. Min/max memory recalls high and low readings. Displays temperature in °F or °C degrees. 10 foot cord for outdoor temperature. 2 AA batteries required (not included).



### #1454

#### Digital Temp Indoor/Outdoor with Clock

2" dual LCD shows indoor and outdoor temperatures. Toggle to display clock. Min/max memory recalls high and low readings. Displays temperature in °F or °C degrees. 10 foot cord for outdoor temperature. 2 AA batteries required (not included).



### #1455

#### Digital Temp Indoor/Outdoor with Humidity

2" dual LCD shows indoor and outdoor temperatures and indoor humidity. Min/max memory recalls high and low readings. Displays temperature in °F or °C degrees. 10 foot cord for outdoor temperature. 2 AA batteries required (not included).



### #1457

#### Wireless Remote Sensor

0.5" LCD shows temperature. For use with models 1453, 1456, 1461, 1462, and 1463. 2 AA batteries required (not included).



### #1463

#### Digital Temp Wireless Weather System

4 line LCD shows indoor/outdoor temperature and humidity. Min/max memory recall. Barometric pressure with forecast icons. Alarm clock and calendar display. Displays temperature in °F or °C degrees. Use up to 3 remotes (one included). 2 AA batteries required for base unit and 2 AA batteries required for remote (not included).

## TERMOMETROS TAYLOR DE CONTACTO



### #6065- J

#### Classic Instant Read 1" Dial Thermometer

Instant read thermometer with a range of -40 C to 70°C. Durable stainless steel stem. Shatterproof plastic lens. Exclusive Safe-T-Set™ recalibration feature. Convenient pocket case.



### #9841

#### Classic Instant Read High Temp Digital Pocket Thermometer

Easy-to-read 3/10" LCD readout. High temperature range of -58°F to 500°F or -50°C to 260°C. On/off switch to prolong battery life. One second updates. Durable stainless steel stem. Pocket sleeve and extra battery included.



### #9842

#### 5\* Commercial Anti-microbial Instant Read Digital Thermometer

Easy-to-read LCD readout. Range -40°F to 450°F or -40°C to 230°C. °F/°C switchable. On/Off switch for long battery life. One-second updates. Durable stainless steel stem. Anti-microbial plastic storage case inhibits growth of pathogens. Waterproof. Recalibratable - complies with HACCP requirements



### #9848

#### 5\* Commercial Anti-microbial Waterproof Digital Thermometer

Compact waterproof digital thermometer. Easy-to-read LCD readout. °F/°C switchable. Range -40°F to 450°F or -40°C to 230°C. On/Off switch and auto shut off for long battery life. Hold and max features. Eight second response time with 2 second updates. Recalibratable. Durable stainless steel stem. Anti-microbial plastic storage case inhibits growth of pathogens. Includes lanyard and 1.5v LR44 battery. NSF approved.

## **TERMOMETROS TAYLOR INFRARROJOS**



**#9515L**

### **Infrared Thermometer**

Infrared thermometer with red laser sight for improved precision. Rugged, solvent-resistant housing. Convenient 6 second temperature hold. Works up to 100 feet. F°/C° selectable. -20° to 600°F. Includes vinyl belt loop case and 9-volt battery.



**#9520**


### **Infrared Thermometer**

Infrared thermometer with laser sight. Registers surface temperatures in half a second. Rugged housing with recessed optics. F°/C° selectable. -4° to 932°F or -20° to 500°C. Accuracy +/- 2°F over the HACCP critical range of 32° to 150°F. Resolution 1°F or 0.5°C. Emissivity preset at 0.95. 8:1 optics. Auto off feature. Includes vinyl carrying case and 9-volt battery.

**D**istribuidora  
**de**  
**O**ccidente


CULIACAN SINALOA MEXICO

**DISTRIBUIDOR EXCLUSIVO  
DE CORTINAS DE AIRE**

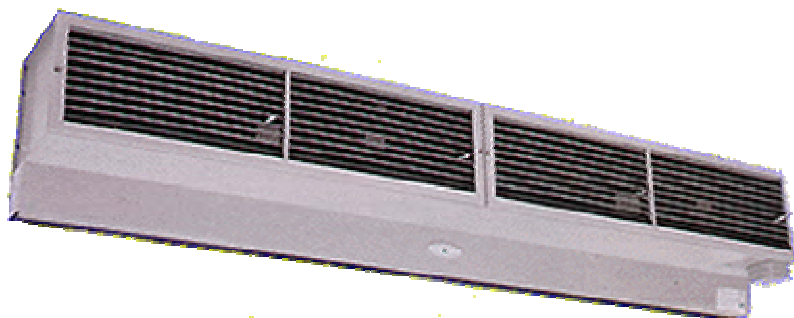

**MOD. C – CH – CHS  
GABINETE DE  
POLICARBONATO  
COLOR BLANCO**

**MOD. WA  
WHISPUR  
GABINETE DE  
POLICARBOTANO  
COLOR BLANCO**

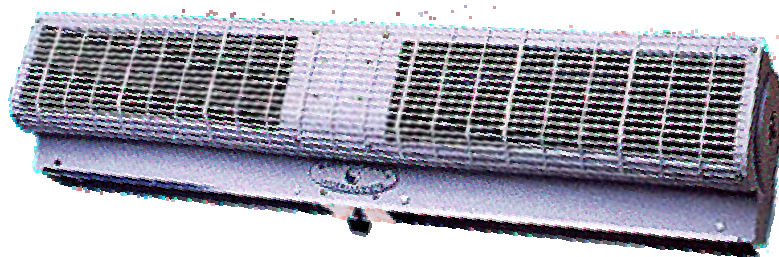

**MOD. ESTANDAR  
MOD. HV EXTRA  
VELOCIDAD  
MOD. EP. EXTRA POWER  
GABINETE METALICO  
COLOR GRIS**

Tel: (667) 716-45-22

Correo Electrónico: Sergio\_valenzuela@prodigy.net.mx

Fax: (667) 712-02-72

Culiacán, Sinaloa, México





CULIACAN SINALOA MEXICO

## CINTAS DE ALUMINIO



**CINTA DE ALUMINIO  
MARCA FASSON  
3" X 50 YDS.  
MOD -802**



**CINTA DE ALUMINIO  
MARCA FASSON  
3" X 50 YDS.  
MOD - 8211**

Tel: (667) 716-45-22

Correo Electrónico: Sergio\_valenzuela@prodigy.net.mx

Fax: (667) 712-02-72

Culiacán, Sinaloa, México

**TERMOSTATO DIGITAL  
NO – PROGRAMABLE  
MARCA ROBERTSHAW**



**SERIE 300  
MODELO 300 - 205  
VOLTAGE 24 V.**



**TERMOSTATO DIGITAL  
NO – PROGRAMABLE  
MARCA INVENSYS**



**SERIE T200  
MODELO T – 205  
VOLTAGE 24 V.**

## BOMBA DE VACIO ROBINAIR



**MOD # 15600 DE 6CFM**  
**MOTOR ½ HP 115 V**

## VOLTAMPERIMETROS



TECHNICAL SPECIFICATIONS

Resistance (Ohms)	400.0
Jaw Capacity (In.)	1
Auto Ranging	Yes
True RMS	No
Audible Continuity	Yes
Features	Auto Power Off
Operating Temp.	14 to 122
Includes	Soft Carrying Case, Test Leads, 2 Batteries, Coated Instruction Card and Safety Information Sheet

TECHNICAL SPECIFICATIONS

Voltage (DC)	600
Resistance (Ohms)	400.0
Jaw Capacity (In.)	1
Auto Ranging	Yes
True RMS	No
Audible Continuity	Yes
Features	Auto Power Off
Operating Temp.	14 to 122
Includes	Soft Carrying Case, Test Leads, 2 Batteries, Coated Instruction Card and Safety Information Sheet.

TECHNICAL SPECIFICATIONS

Voltage (DC)	600
Resistance (Ohms)	600.0/6K
Jaw Capacity (In.)	1.2
Auto Ranging	Yes
True RMS	No
Audible Continuity	Yes
Features	Auto Power Off
Operating Temp.	14 to 122
Includes	Soft Carrying Case, Test Leads, 2 Batteries, Coated Instruction Card and Safety Information Sheet

## GRAFICADORES DE TEMPERATURA



**MARATHON**



**COX TRACER**

- **MARATHON DESECHABLES**
- **COX TRACER DIGITAL SOFTWARE**