
HOSES

All SuperKlean hoses are flexible, lightweight, economical, durable, and safe. They come with your choice of end swivel adapter for nozzles and 3 piece adapter for mixing units. Hoses are available in lengths of 25', 50', 75', and 100' and can also be supplied in increments of 25' up to 500'. SuperKlean offers a wide variety of hose constructions and materials to suit all your washdown needs. Please review the information listed below for additional specifications on hoses offered by SuperKlean or contact us for additional details regarding your specific needs.

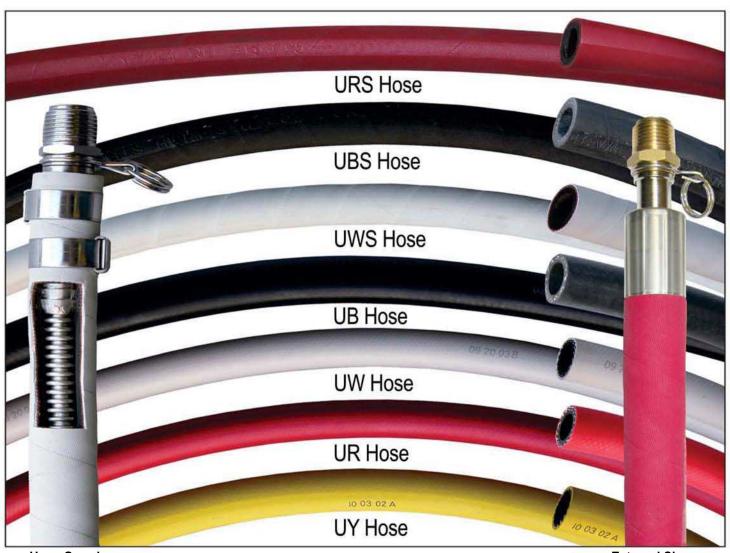

Hose Guard
Optional
HOSES NOT FOR USE WITH STEAM

External Sleeve Optional

ALL HOSES HAVE A MAXIMUM TEMPERATURE RATING OF 200°F

Part #:	Inner Diameter	Max Pressure	Cover Color	Cover Material	Tube Material	Reinforcement
UW	1/2" & 3/4"	250 PSI	White	Smooth EPDM	EPDM	4 Polyester Yarn Spirals
UB	1/2", 5/8" & 3/4"	250 PSI	Black	Smooth EPDM	EPDM	4 Polyester Yarn Spirals
UR	3/4"	250 PSI	Red	Smooth EPDM	EPDM	4 Polyester Yarn Spirals
UY	3/4"	400 PSI	Yellow	Smooth Nitrile	Nitrile	2 Polyester Yarn Spirals
UBS	5/8"	250 PSI	Black	Wrapped Neoprene	Chlorobutyl	Single Rayon Textile Braid
UWS	5/8"	250 PSI	White	Wrapped Hypalon	Chlorobutyl	Single Rayon Textile Braid
URS	5/8"	250 PSI	Red	Wrapped Neoprene	Chlorobutyl	Single Rayon Textile Braid